

**USER MANUAL**

**\_PIGMENTS**

**ARTURIA**

**\_The sound explorers**

# Special Thanks

---

## DIRECTION

---

Frédéric Brun                      Kevin Molcard

---

## PROJECT MANAGEMENT

---

Samuel Limier

---

## PRODUCT MANAGEMENT

---

Edouard Madeuf (lead)      Sebastien Rochard      Victor Morello      Gustavo Bravetti  
Christophe Luong      Jeffrey Horton      Maxime Audfray      Simon Gallifet

---

## DIGITAL SIGNAL PROCESSING

---

Samuel Limier (lead)      Hugo Caracalla      Geoffrey Gormond      Fanny Roche  
Marc Antigny      Mauro De Bari      Rasmus Kürstein  
Kevin Arcas      Alessandro De Cecco      Marius Lasfargue

---

## SOFTWARE

---

Yann Burrer (lead)      Alexandre Adam      Raynald Dantigny      Fabien Meyrat  
Corentin Comte      Stéphane Albanese      Loris De Marco      Mathieu Nocenti  
Christophe Luong      Pauline Alexandre      Pascal Douillard      Marie Pauli  
Patrick Perea      Baptiste Aubry      Christophe Luong      Patrick Perea  
**SW libraries:**      Yann Burrer      Cyril Lépinette  
Pierre-Lin Laneyrie (lead)      Corentin Comte      Pierre Mazurier

---

## DESIGN

---

Edouard Madeuf (lead)      Maxence Berthiot      Florian Rameau      Morgan Perrier

---

## SOUND DESIGN

---

Maxime Audfray (lead)      Klaus Dieter-Pollack      Marco Iodice      Sebastien Rochard  
Victor Morello      Emptyvessel      Lily Jordy      Jeremiah Savage  
Arovane      Torsten Fassbender      Thomas Koot      Hugo Sebastian  
Alexandre Adam      Quentin Feuillard      Ksenija Ladic      Solidtrax  
Klaus Baetz      Fragment Audio      Lektrique      Andrew Souter  
Bastiaan Barth      Patrick Fridh      Edouard Madeuf      (Galbanum)  
Clément Bastiat      Mord Fustang      Florian Marin      Starcadian  
Jean-Michel Blanchet      Baptiste Le Goff      Tobias Menguser      Diego Tejelda  
Gustavo Bravetti      Simon Gallifet      New Loops      Richard Veenstra  
Matthieu Bosshardt      Torben Hansen      Jesse Osborne-Lanthier      Venus Theory  
Corentin Comte      Menno Hoomans      Matt Pike      Yuli Yolo  
Denis Da Silva      Ludo Hourdebaigt      Raphael Radna      Zardonix  
Maxime Dangles      Andrew Huang      Alex Retsis  
Raynald Dantigny      Jörg Hüttner      Asaël Robitaille

---

## QUALITY ASSURANCE

---

Aurélien Mortha (lead)	Arnaud Barbier	Nicolas Naudin	Enrique Vela
Matthieu Bosshardt	Bastien Hervieux	Roger Schumann	Julien Viannenc
Nicolas Stermann	Germain Marzin	Adrien Soyer	

---

## MANUAL

---

Stephen Fortner                      Jimmy Michon

---

## IN-APP TUTORIALS

---

Gustavo Bravetti

---

## BETA TESTING

---

Angel Alvarado	Dwight Davies	Randy Lee	Axel Rigaud
Jeremy Bernstein	Adrian Dybowski 'Navi Retlav'	Olivier Malhomme	Fernando Manuel Rodrigues
Bastiaan Bart	Ben Eggehorn	Terry Marsden	Daniel Saban
David Birdwell	Boele Gerkes	William McKnight	Solidtrax
Gustavo Bravetti	Kirke Godfrey	Gary Morgan	Tony Flying Squirrel
Andrew Capon	Lance Gilbert	Paolo Apollo Negri	Paul Steinway
Charles Capsis	Tom Hall- Mat Herbert	Nvadradio	TJ Trifeletti
Jeffrey M Cecil	Jay Janssen	Ken Flux Pierce	George Ware
Marco Correia 'Koshdukai'	Stive Joseph	Matt Pike	Stephen Wey
Raphaël Cuevas		Davide Puxeddu	

© ARTURIA SA - 2022 - All rights reserved.

26 avenue Jean Kuntzmann  
38330 Montbonnot-Saint-Martin  
FRANCE

[www.arturia.com](http://www.arturia.com)

Information contained in this manual is subject to change without notice and does not represent a commitment on the part of Arturia. The software described in this manual is provided under the terms of a license agreement or non-disclosure agreement. The software license agreement specifies the terms and conditions for its lawful use. No part of this manual may be reproduced or transmitted in any form or by any purpose other than purchaser's personal use, without the express written permission of ARTURIA S.A.

All other products, logos or company names quoted in this manual are trademarks or registered trademarks of their respective owners.

**Product version: 4.0.0**

**Revision date: 13 December 2022**

# Thank you for purchasing Pigments!

This manual covers the features and operation of Arturia's **Pigments**, the latest in a long line of powerful virtual instruments.

**Be sure to register your software as soon as possible!** When you purchased Pigments you were sent a serial number and an unlock code by e-mail. These are required during the online registration process.

## Special Messages

### Specifications Subject to Change:

The information contained in this manual is believed to be correct at the time of printing. However, Arturia reserves the right to change or modify any of the specifications without notice or obligation to update the hardware that has been purchased.

### IMPORTANT:

The software, when used in combination with an amplifier, headphones or speakers, may be able to produce sound levels that could cause permanent hearing loss. DO NOT operate for long periods of time at a high level or at a level that is uncomfortable.

If you encounter any hearing loss or ringing in the ears, you should consult an audiologist.

### EPILEPSY WARNING – Please Read Before Using Pigments

Some people are susceptible to epileptic seizures or loss of consciousness when exposed to certain flashing lights or light patterns in everyday life. This may happen even if the person has no medical history of epilepsy or has never had any epileptic seizures. If you or anyone in your family has ever had symptoms related to epilepsy (seizures or loss of consciousness) when exposed to flashing lights, consult your doctor prior to using this software.

Discontinue use and consult your doctor *immediately* if you experience any of the following symptoms while using this software: dizziness, blurred vision, eye or muscle twitches, loss of consciousness, disorientation, or any involuntary movement or convulsion.

## Precautions to Take During Use

- Do not stand too close to the screen.
- Sit a good distance away from the screen.
- Avoid using if you are tired or have not had much sleep.
- Make sure that the room is well lit.
- Rest for at least 10 to 15 minutes per hour of use.

# Introduction

## **Congratulations on your purchase of Arturia's Pigments!**

We'd like to thank you for purchasing Pigments, which is perhaps our most powerful and flexible virtual instrument ever. Where the soft synths of our V Collection are meant to bring you spot-on emulations of the world's most coveted hardware synths, Pigments is a different beast altogether. Its multiple sound engines – Analog, Sample, Wavetable, Harmonic, and Utility – let you mix and match synthesis methods as you see fit. Add an intuitive modulation matrix with sources from the familiar to the exotic, a powerful sequencer/arpeggiator, and breathtaking audio FX, and you have a tool of limitless creative potential.

Arturia has a passion for excellence, and Pigments is no exception. Listen to the sounds; tweak a few controls; skim through the features, or dive as deep as you like; you will never reach the bottom of it. We are confident that Pigments will prove to be an invaluable companion as you sail the waters of your imagination.

Be sure to visit the [www.arturia.com](http://www.arturia.com) website for information about all of our other great hardware and software instruments. They have become indispensable, inspiring tools for musicians around the world.

Musically yours,

**The Arturia team**

# Table Of Contents

1. WELCOME TO PIGMENTS 4.....	6
1.1. A Bottomless Well of Synthesis Power .....	6
1.2. Features of Pigments 4 .....	7
2. Activation & First Start.....	10
2.1. System Requirements .....	10
2.2. Activate the Pigments license .....	10
2.2.1. The Arturia Software Center (ASC).....	10
2.3. Audio and MIDI Settings .....	11
2.3.1. Windows.....	11
2.3.2. macOS.....	12
2.3.3. Pigments as a Plug-in.....	13
3. Overview of Features .....	14
3.1. Virtual Keyboard Location .....	14
3.2. The Upper Tool Bar.....	15
3.2.1. Main Menu.....	15
3.2.2. Preset Browser Overview.....	21
3.2.3. Play View Button .....	22
3.2.4. Synth Panel Button.....	23
3.2.5. FX Panel Button.....	23
3.2.6. Seq Button.....	24
3.2.7. Sound Design Tips view.....	25
3.2.8. Master Volume.....	25
3.2.9. Gear Icon.....	26
3.3. The Modulation Overview .....	32
3.4. Mod Source Groups .....	33
3.5. Macro Controls.....	33
3.6. The Lower Toolbar.....	34
3.6.1. Parameter description .....	34
3.6.2. Play Mode.....	34
3.6.3. Undo/Redo and History Buttons .....	35
3.6.4. CPU meter.....	35
3.6.5. The Maximize View Button .....	36
4. The Preset Browser .....	37
4.1. Search and Results.....	37
4.2. Using Tags as a Filter.....	38
4.2.1. Types .....	38
4.2.2. Styles.....	39
4.2.3. Banks.....	39
4.2.4. User Toggle.....	40
4.2.5. Alternate View.....	40
4.3. Search Results window.....	41
4.3.1. Clearing Tags .....	41
4.3.2. Sorting the Preset Order.....	41
4.3.3. Liking Presets.....	42
4.3.4. Color Coding Presets.....	42
4.4. Sidebar .....	43
4.4.1. My Sound Banks .....	43
4.4.2. My Favorites .....	44
4.4.3. My Playlists.....	44
4.5. Preset Info Section.....	45
4.5.1. Editing Info for Multiple Presets .....	45
4.6. Preset Selection: Other Methods .....	46
4.7. Quick Graphics .....	47
4.8. Playlists .....	47
4.8.1. Add a Playlist .....	47
4.8.2. Add a Preset.....	48
4.8.3. Re-order the Presets.....	48
4.8.4. Preset Management.....	49
4.8.5. Songs in Playlists .....	50
4.8.6. Playlist Management.....	51

5. The Play View .....	52
5.1. Upper Section .....	52
5.1.1. Turn Sections On and Off .....	52
5.1.2. Select the Engine Type .....	53
5.1.3. Filter Controls .....	59
5.1.4. Effects Controls .....	60
5.2. Middle Section .....	61
5.3. Lower Section .....	62
5.3.1. Keyboard and Controls .....	62
5.3.2. Amplitude Envelope .....	62
6. The Engine Types .....	63
6.1. Common Engine Features .....	63
6.1.1. Engine Menu .....	63
6.1.2. Copy Engines .....	64
6.1.3. Output Section (All Engines Except Utility) .....	65
6.1.4. Engine On/Off Button .....	65
6.1.5. Engine Tune .....	66
6.1.6. Unison/Shaper (All Engines) .....	70
6.2. The Analog Engine .....	71
6.2.1. Analog Engine Tuning .....	71
6.2.2. Analog Unison Mode .....	72
6.2.3. Oscillators .....	75
6.2.4. Noise Section .....	77
6.2.5. Modulator .....	78
6.3. The Wavetable Engine .....	80
6.3.1. Wavetable Viewer .....	80
6.3.2. Morph and View Buttons .....	81
6.3.3. Wavetable Selection Menu .....	81
6.3.4. Wavetable Browser .....	82
6.3.5. Wavetable Engine Tune .....	86
6.3.6. Wavetable Unison Mode .....	87
6.3.7. Frequency Modulation (Freq Mod, or FM) .....	88
6.3.8. Phase Modulation (PM) .....	89
6.3.9. Phase Transformation .....	91
6.3.10. Wavefolding .....	93
6.3.11. Wavetable Section .....	95
6.3.12. Modulation oscillator .....	96
6.4. The Sample Engine .....	100
6.4.1. Six Samples per Engine .....	100
6.4.2. Sample Selection .....	100
6.4.3. Sample Browser .....	101
6.4.4. Sample Viewer .....	103
6.4.5. Editing Your Samples .....	104
6.4.6. Map Mode .....	108
6.4.7. Sample Engine Tune .....	109
6.4.8. Sample/Grain Section .....	109
6.4.9. Granular Section .....	110
6.4.10. Shaper Mode .....	112
6.4.11. Output Section .....	114
6.4.12. Modulator Oscillator .....	115
6.5. The Harmonic Engine .....	116
6.5.1. Tune and Output Sections .....	116
6.5.2. Partials Section .....	117
6.5.3. Partials Viewer .....	118
6.5.4. Ratio Section .....	119
6.5.5. Spectrum Section .....	120
6.5.6. Imaging Section .....	122
6.5.7. Partial Shaper Section .....	123
6.5.8. Modulator Section .....	126
6.6. Engine Cross Modulation .....	127
6.6.1. Analog Engine as Mod Source .....	128
6.6.2. Wavetable Engine as Mod Source .....	129

6.6.3. Sample Engine as Mod Source .....	130
6.6.4. Harmonic Engine as Mod Source .....	131
<b>6.7. The Utility Engine .....</b>	<b>132</b>
6.7.1. Noise Sources .....	132
6.7.2. Oscillator .....	134
6.7.3. Output Section .....	114
<b>7. The Filters .....</b>	<b>138</b>
7.1. Common Filter Features .....	138
7.1.1. Filter View Window .....	138
7.1.2. Filter Type Menu .....	139
7.1.3. Filter Volume .....	139
7.1.4. Filter Pan .....	139
7.1.5. Filter Bypass .....	140
7.1.6. Filter Edit Row .....	140
7.1.7. Series, Parallel, or Both .....	140
7.2. Filter Types and Modes .....	141
7.2.1. MultiMode .....	141
7.2.2. MS-20 .....	142
7.2.3. SEM .....	143
7.2.4. Matrix 12 .....	144
7.2.5. Mini .....	145
7.2.6. Jup-8 .....	146
7.2.7. Surgeon .....	146
7.2.8. Comb .....	147
7.2.9. Phaser Filter .....	148
7.2.10. Formant .....	149
7.2.11. LowPass Gate .....	150
7.3. Filter FM Sources .....	151
<b>8. Filter Routing/Amp Mod section .....</b>	<b>152</b>
8.1. Filter Routing .....	152
8.1.1. Filter Routing Drop-Down Menu .....	152
8.1.2. Filters in Series .....	153
8.1.3. Filters in Parallel .....	153
8.1.4. Blending Parallel and Series .....	154
8.1.5. FX Sum vs FX Split Modes .....	154
8.2. VCA section .....	155
8.2.1. Amp Mod .....	155
8.2.2. Voice Pan and Send Level .....	156
<b>9. The Effects Tab .....</b>	<b>157</b>
9.1. Common FX Features .....	157
9.1.1. Bus/Aux Tabs .....	157
9.1.2. FX Type Selection .....	158
9.1.3. Effect Presets .....	159
9.1.4. Effect and Bus bypass (on/off switches) .....	159
9.1.5. Change FX Order .....	160
9.2. Bus A/B Routing .....	161
9.2.1. Series .....	161
9.2.2. Reverse Series .....	161
9.2.3. Parallel .....	161
9.3. FX Aux Tab .....	161
9.4. Effects Insert/Send sections .....	162
9.4.1. Bus A/B Volume controls .....	162
9.4.2. Aux Bus Send control .....	162
9.4.3. Aux Bus Return control .....	163
9.5. Effect Parameters .....	164
9.5.1. Delay .....	164
9.5.2. Tape Echo .....	165
9.5.3. Pitch-Shifting Delay .....	166
9.5.4. Reverb .....	167
9.5.5. Shimmer .....	168
9.5.6. Distortion .....	169
9.5.7. BitCrusher .....	171



9.5.8. Compressor.....	172
9.5.9. Multiband.....	173
9.5.10. Super Unison.....	175
9.5.11. Chorus.....	176
9.5.12. Chorus JUN-6.....	177
9.5.13. Flanger.....	178
9.5.14. BL-20 Flanger.....	179
9.5.15. Phaser.....	180
9.5.16. Stereo Pan.....	181
9.5.17. Multi Filter.....	182
9.5.18. Param EQ.....	183
<b>10. The Sequencer Tab.....</b>	<b>184</b>
<b>10.1. Arp/Seq Shared Features.....</b>	<b>184</b>
10.1.1. Arp/Seq Mode Selection.....	184
10.1.2. Pattern Length.....	185
10.1.3. Tracks.....	186
10.1.4. Editing a Track.....	188
10.1.5. Random / Reset column.....	189
10.1.6. Lock Columns.....	191
10.1.7. Randomize section.....	191
10.1.8. Rate Section: Sync, Swing, and Hold.....	193
10.1.9. Polyrhythm Mode.....	194
10.1.10. MIDI Output.....	195
<b>10.2. Arpeggiator (Arp).....</b>	<b>195</b>
10.2.1. Arp Modes.....	195
10.2.2. Chord Arpeggiation.....	196
<b>10.3. Sequencer (Seq).....</b>	<b>196</b>
10.3.1. Pitch.....	196
<b>11. Sound Design Tips.....</b>	<b>198</b>
11.1. Using Sound Design Tips.....	198
11.2. Information Display.....	199
11.2.1. The Visual Cues.....	199
11.3. Advanced Edit Tips.....	200
11.3.1. Add/Remove Sound Design Tips.....	201
11.3.2. Editing Sound Design Tips.....	201
<b>12. Modulation Routings.....</b>	<b>202</b>
12.1. Understanding the Modulation Section.....	202
12.1.1. Center Strip: Three Views.....	202
12.1.2. Visual Cues.....	205
12.2. Working with Modulations.....	207
12.2.1. Method 1: Drag and Drop.....	207
12.2.2. Method 2: Mod Source View.....	209
12.2.3. Method 3: Mod Target View.....	211
12.2.4. Modulation Quick Edit.....	216
12.2.5. Side Chains.....	218
12.3. More on Modulation – Useful Tips.....	219
12.3.1. Knob States.....	219
12.3.2. Display of Modulation Ranges.....	221
12.3.3. How Bipolar Mod Sources Affect Mod Ranges.....	222
<b>13. Modulation Sources.....</b>	<b>223</b>
<b>13.1. Keyboard Tab.....</b>	<b>223</b>
13.1.1. The Virtual Keyboard.....	223
13.1.2. Pitch and Mod Wheels.....	223
13.1.3. Bend Range.....	224
13.1.4. Release Button.....	224
13.1.5. Play Settings.....	224
13.1.6. Voice Settings.....	224
13.1.7. Keyboard Curves Section.....	225
<b>13.2. Envelopes Tab.....</b>	<b>226</b>
13.2.1. Env 1: Hardwired to VCA.....	226
13.2.2. Envelope Parameters.....	226
13.2.3. Release Link Buttons.....	227

13.2.4. ADR versus ADSR.....	227
<b>13.3. LFO tab.....</b>	<b>228</b>
13.3.1. LFO Presets.....	228
13.3.2. KeyTrack/Fade/Smooth.....	228
13.3.3. LFO Retrig Source.....	229
<b>13.4. Functions Tab.....</b>	<b>230</b>
13.4.1. Adding/Removing a Point.....	232
13.4.2. Moving a Point.....	232
13.4.3. Changing a Curve.....	232
13.4.4. Drawing Tools.....	233
13.4.5. Copy Between Functions.....	233
13.4.6. Working with Function Presets.....	234
13.4.7. Play Mode.....	34
13.4.8. Envelope Mode.....	235
13.4.9. Retrig Source.....	236
13.4.10. The Dice Icon.....	236
<b>13.5. Random Tab.....</b>	<b>237</b>
13.5.1. Turing.....	237
13.5.2. Sample & Hold.....	0
13.5.3. Binary.....	239
<b>13.6. Combine Tab.....</b>	<b>240</b>
13.6.1. Combine Types.....	241
13.6.2. Lag.....	242
<b>13.7. Macros.....</b>	<b>243</b>
<b>14. Software License Agreement.....</b>	<b>244</b>

# 1. WELCOME TO PIGMENTS 4

## 1.1. A Bottomless Well of Synthesis Power

When Pigments originally launched in late 2018, it was a big step in a new direction for Arturia. Pigments was our first virtual instrument that was *not* an emulation of an existing piece of classic hardware. It was an entirely new creation, an exciting synthesizer that brought new sonic colors into the world with its mind-bogglingly powerful modulation matrix connected to fantastic-sounding oscillators, filters, and effects.

The multiple sound engines in Pigments made it a powerhouse for everything from classic synth patches to experimental sound design. Film, TV, and video game composers embraced it. And of course, users wanted *more*.

In Pigments 2, we answered that call with a sample-based sound engine that complemented the original virtual Analog and Wavetable engines and opened the door to granular synthesis. We made extensive updates to the modulation matrix, sequencer, effects, and more. We even added MPE (MIDI Polyphonic Expression) to support the growing number of controllers that offer per-note performance gestures such as aftertouch, key X and Y position, and glide.

Pigments 3 upped the ante even more. A new Harmonic sound engine brought additive synthesis to the table, letting you craft complex spectral timbres not achievable by other means. Then, a Utility engine with its own tab provided a sub-oscillator with supplemental analog waveforms as well as two creative noise sources for sampled special effects including nature ambiances, lo-fi tape and vinyl, and much more. All in all, you can layer three synthesis engines together at once.

Pigments 3 also added more than 80 new wavetables to our Wavetable engine and a new ramp waveform to our Analog engine. Filter routing became more flexible and envelope performance more precise. The Combine tab, which combines two modulation sources into one, gained three Combinators instead of two. Four new processors rounded out our FX section.

Pigments 3.5 added the ability to cross-modulate the two main synthesis engines with one another. The effects section gained an updated Distortion effect featuring algorithms ranging from soft clipping to heavy saturation, as well as its own multi-mode filter. As for Pigments' main Filters 1 and 2, the Comb filter type received three new modes with an added filter in the feedback path, allowing you to create highly realistic strings and plucked instruments such as guitar or harpsichord. Select filter types could be modulated using Engine 1 or 2 as a source. More wavetables for the Wavetable Engine were added.

Now, Pigments 4 elevates your synthesis exploration even higher with a host of new features and a new look. Want to drag and drop modulation sources directly to their destinations? You can do that. Want even more sonic content – from vocal samples to sung phrases to acoustic instruments to wavetables – in the sample and wavetable engines, plus creative new noise sources? We put it in there. We've made the onscreen keyboard panel cleaner, and added a bunch of workflow improvements that make Pigments 4 even more of a joy to use. What's more, we will be pursuing an even more aggressive release schedule of new Preset banks that fit perfectly into whatever genres of music you prefer – whether you're an urban or dance producer, a keyboardist in a band, a film/TV composer, an experimental electronic explorer, or anything in between.

Pigments runs both as a stand-alone instrument on Windows and macOS and as a VST/AU/AAX plug-in within your DAW. It has easy MIDI learn functionality for hands-on control of most parameters, and as a plug-in also allows parameter automation for greater creative control.

## 1.2. Features of Pigments 4

Here is an overview of the features you have at your disposal with Pigments. Those added in Pigments 4 are at the beginning.

- New simplified Play View for accessing the most important features
- Classic (dark) and light-colored themes selected from main menu
- Quick edit of modulation amounts
- Drag-and-drop assignment of modulation sources to destinations
- Quick selection of LFO waveforms via presets
- Rate sync of time-based modulation sources now accesses all rhythmic feels (straight, dotted, and triplet) in one place with a single knob sweep
- Even more samples, wavetables, and noise types
- Updated keyboard panel
- New waveform and pattern presets for LFOs and Functions
- New effects: Super Unison and Shimmer
- New filter type: MS-2O
- Improvements to existing effects: Bit Crusher, Multi Filter, and Multi Distortion
- Support for MTS-ESP microtuning
- 63 new samples, 63 new wavetables, and 60 new noises
- Improved phase manipulation options in Wavetable and Harmonic Engines
- GUI refinement
- Even better CPU optimization options
- Five voice engine types: Analog, Wavetable, Sample/Granular, Harmonic, and Utility.
- Two main Engine slots plus dedicated Utility Engine slot.
- Cross-modulation of Engine 1 by Engine 2 or vice-versa – or both at the same time!
- Analog engine features:
  - Three oscillators per voice with multiple waveforms
  - Variable pulse width (Triangle, Square)
  - Hard sync (Osc 2->1)
  - Quantizable modulation of pitch
  - Variable noise source
  - Programmable random oscillator drift to emulate vintage behavior
  - Frequency Modulation (FM)
  - Three Modes (Classic, Chord and Super)
- Wavetable engine features:
  - Browse/select preset wavetables or use your own
  - Morph or jump between wavetable positions
  - Quantizable modulation of pitch
  - Three Unison modes (Classic, Chord, Super)
  - FM (Linear or Exponential)
  - Phase Modulation
  - Phase Distortion
  - Wavefolding
  - Variable Modulator with ten wave sources and three tuning modes
  - 59 new wavetables dedicated to Pigments 3.5

- Sample/Granular engine features:
  - Provides both sample playback and Granular synthesis functionality
  - Browse/select preset samples or use your own
  - Quantizable modulation of pitch
  - Shaper with Unison, Resonator, BitCrusher, and FM/RM modulation
  - Loads up to six samples
  - Six sample selection modes
  - Audition samples before loading, with adjustable cue volume
  - Powerful sample editing and looping functions
  - Lowpass / highpass filter
  - Advanced granular functions with randomize options
  - Variable Modulator with ten wave sources and three tuning modes
- Harmonic engine features:
  - Up to 512 partials (harmonics)
  - Selectable limits on partials to conserve CPU power
  - Accurate graphical display of active partials
  - Dedicated modulation oscillator for FM and modulating other parameters
  - Morphing between two spectrums that can further shape the partials, with 12 choices for each.
  - Smooth mode for gradual changes in partials' levels
  - Multiple partial modulation modes: window, cluster, and Shepard.
  - Fine-grained control over distribution of partials across the frequency spectrum
  - Quantizable modulation of pitch
  - Three stereo imaging modes
- Utility engine features:
  - Additional virtual analog oscillator under its own tab
  - Serves as a sub-oscillator by default but useful across the entire pitch range
  - Two sources of sampled "noise" for transients, ambiances, nature sounds, and more
  - Independent LP/HP filters for each noise source
  - Independent phase, tuning, keyboard tracking, filter mix, and volume for each noise source
  - Variable sample length for each source, from brief transient to continuous loop
- Ten continuously variable filter types, including
  - Four analog filter models: Mini, SEM, Matrix 12, and Jup-8
  - New Comb filter model (Pigments 3.5)
  - LowPass Gate filter
  - BP/LP/HP, Notch, Phaser and Formant types, plus combinations
  - 6 dB/octave to 64 dB/octave slopes
  - Most filters have variable resonance, can self-oscillate
  - Filter FM with selectable sources including Engine 1/2 for (Matrix 12, Mini, SEM, and LowPassGate types)
  - Stereo panning per filter with modulation capabilities
  - Series or parallel routing with hundreds of intermediate gradations

- A nearly unlimited number of modulation sources and destinations
  - Unique modulation sources such as Turing, Binary, Functions, and Combinate
  - Four definable, assignable Macro sources for complex, simultaneous modulations
  - Three syncable LFO sources with flexible shapes, phases, trigger sources, and polarity
  - Three highly adjustable envelopes, two of which can be looped/triggered by over a dozen sources
- Flexible modulation of final output stage, including level and voice panning
- Powerful step sequencer and arpeggiator
- An arsenal of studio-quality effects
  - 3 multi-FX chains, with up to 3 simultaneous effects each, for a total of 9 simultaneous FX
  - Chorus/flange/phaser, Reverb, Delay, EQ, Filter, Wavefolder, and more
  - New in Pigments 3: Pitch-Shifting Delay, Multi-Band Compressor, BL-2O Flanger and JUN-6 chorus from our FX Collection
  - New in Pigments 3.5: Updated Distortion with 13 new algorithms
  - New Mono Bass parameter in Stereo Pan effect
  - New Output Gain compensation in Compressor effect
- Independent up/down pitch bend ranges (+/- 36 semitones)
- MIDI-assignable parameter control
- The Sound Design Tips feature draws attention to certain parameters and their optimal ranges
- Preset browser can filter by Type, Style, Name, etc.

We've listed a lot of features here but have still only scratched the surface of the capabilities of this formidable instrument. We enjoyed developing Pigments so much, we had to keep reminding ourselves that this was work! Pigments is at once a playground, a factory, and a universe of its own.

And now ... Arturia Pigments 4.

## 2. ACTIVATION & FIRST START

### 2.1. System Requirements

Pigments works on computers that meet these minimum specifications:


#### Windows 10 or Later (64bit)

- 4 GB RAM; 2.5 GHz CPU
- 1GB free hard disk space
- OpenGL 2.0 compatible GPU with up-to-date drivers

#### macOS 10.13 or Later

- 4 GB RAM; 2.5 GHz CPU
- 1GB free hard disk space
- OpenGL 2.0 compatible GPU

You can use the stand-alone version of Pigments or use it within 64-bit DAWs as an Audio Units, AAX, VST 2.4 or VST 3 instrument.

 ! Note that the above are *minimum* specs for Pigments to run. The more powerful your computer is, the more polyphony and performance you will enjoy.



### 2.2. Activate the Pigments license

Once Pigments has been installed, the next step is to activate your license for the software.

This is a simple process that involves a different software program: the Arturia Software Center.

#### 2.2.1. The Arturia Software Center [ASC]

If you have not already installed the ASC, please go to this web page: [Arturia Downloads & manuals](#)

The Arturia Software Center is at the top of the list. Once you've located it, download the version of the installer that you need for your system (macOS or Windows).

Follow the installation instructions and then:


- Launch the Arturia Software Center (ASC)
- Log into your Arturia account
- Scroll down to the My Products section of the ASC
- Click the Activate button

That's all there is to it!


## 2.3. Audio and MIDI Settings

### 2.3.1. Windows

At the top left of the Pigments application window is an icon with three horizontal lines that brings up the pull-down main menu. Here, you will initially choose the Audio MIDI Settings option to get MIDI flowing in and sound flowing out.

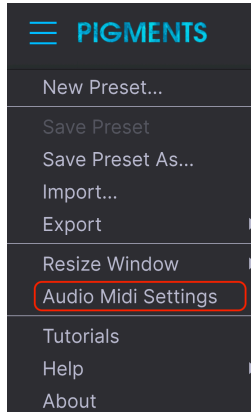

You will then see the Audio MIDI settings window. This works the same on both Windows and macOS, although the names of the devices available will depend on the hardware you are using.

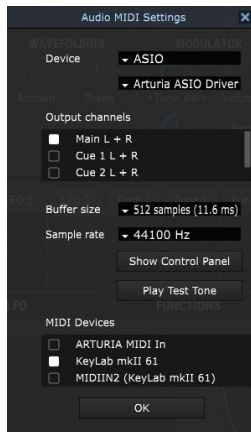




Starting from the top you have the following options:

- **Device** lets you choose which audio driver you want to use to route sound out of the instrument. This might be your computer's own driver like Windows Audio, or an ASIO driver. The name of your hardware interface may appear in this field.
- **Output Channels** lets you select which of the available outputs will be used to route audio out. If you only have two outputs, only two will appear as options. If you have more than two you can select a specific pair of outputs.
- The **Buffer Size** menu lets you select the size of the audio buffer your computer uses to calculate sound. A smaller buffer means lower latency between pressing a key and hearing the note. A larger buffer means a lower CPU load as the computer has more time to think, but can result in a small latency. Find the optimum buffer size for your system. A fast, modern computer should easily be able to operate at 256 or 128 sample buffer size without creating pops or clicks in the sound. If you are getting clicks, try raising the buffer a little. The latency is displayed on the right hand side of this menu.
- The **Sample Rate** menu lets you set the sample rate at which audio is sent out of the instrument. The options here will depend on the capability of your audio interface hardware though even most computers' own hardware can operate at up to 48kHz which is perfectly fine. Higher sample rates use more CPU power so unless you have a good reason to go up to 96kHz, then 44.1k or 48k is usually fine.
- The **Show Control Panel** button will jump to the system control panel for whatever audio device is selected.
- **Play Test Tone** helps you to troubleshoot audio issues by confirming whether sound can be heard through the correct device.
- Your connected MIDI devices will appear in the **MIDI Devices** area. Click the checkbox to accept MIDI from the device you want to use to trigger the instrument. In standalone mode, Pigments listens for all MIDI channels so there's no need to specify a channel. You can specify more than one MIDI device at once.

### 2.3.2. macOS

The process is very similar to initial setup for Windows and the menu is accessed in the same way. The difference is that macOS uses CoreAudio to handle audio routing and the audio device selection is made in the second dropdown menu. Apart from that, the options work the same way as described in the Windows section.

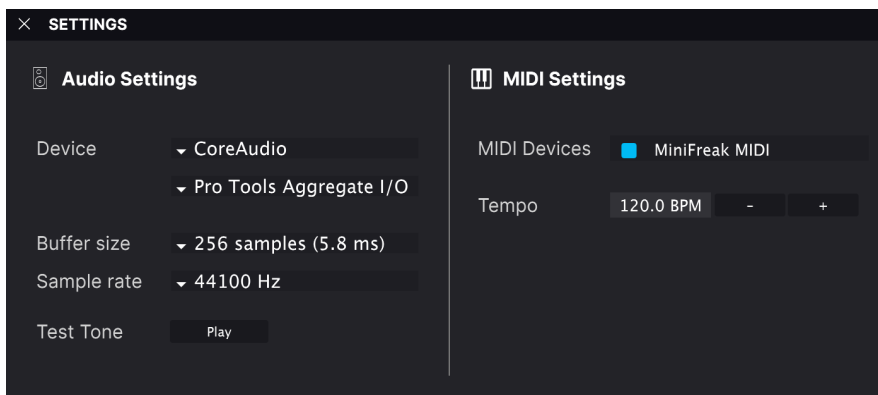

### 2.3.3. Pigments as a Plug-in

Pigments comes in VST, VST3, AU and AAX plug-in formats for use in all major DAW software such as Cubase, Logic, Pro Tools, and so on. You can load it as a plug-in instrument and its interface and settings work the same way as in standalone mode, with a couple of differences.

- The instrument will now synchronize to your DAW's host tempo/bpm rate, when tempo is a factor.
- You can automate numerous parameters using your DAW's automation system.
- You can use more than one instance of Pigments in a DAW project. In standalone mode you can only use one at once.
- Any additional audio effects your DAW has available may be used to process the sound, including delay, chorus, filters, etc.
- You can route Pigments' audio outputs freely inside your DAW using the DAW's own audio routing system.

## 3. OVERVIEW OF FEATURES

Pigments has a phenomenal set of features, and in this chapter we'll provide an overview of what each one does. We think you'll be amazed by the power and versatility of this instrument.


Yet for all its power, the layout of this synthesizer is very intuitive. That will always be the main focus of every Arturia product: to maximize your creativity while remaining easy to use.




The specific operation of each feature will be covered in other chapters.

### 3.1. Virtual Keyboard Location

Most of our software instruments have a virtual keyboard which can be used to play a sound without the need for an external MIDI device. [Pigments has one \[p.223\]](#), and it is available when the **Keyboard** tab is selected in the bottom half of the window.

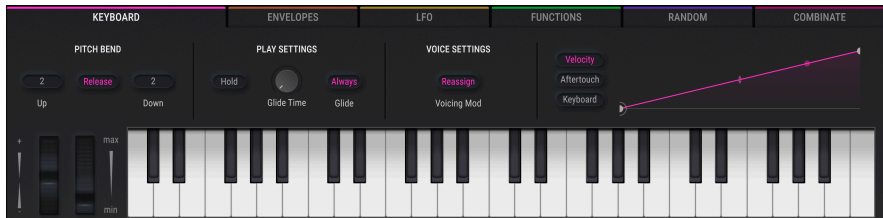

## 3.2. The Upper Tool Bar




The toolbar that runs along the top edge of the instrument provides access to many useful features. Let's look at them in detail, from left to right.

### 3.2.1. Main Menu

The Main menu is accessed by clicking the three horizontal lines in the left corner of the upper tool bar. Here, you can access important preset management and configuration functions.


#### 3.2.1.1. New Preset

This creates an entirely new Preset with default settings. (These include Engine 1 set to Wavetable and Engine 2 set to Sample, plus a single filter set to Multimode.)



### 3.2.1.2. Save Preset

**i** ! This option will overwrite the active preset with any changes you have made. If you want to keep the source preset also, use the Save As option instead. For information about this [see the next section \[p.16\]](#).

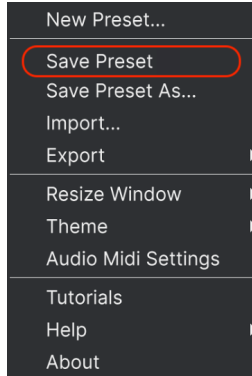


**i** ! The factory presets cannot be altered. In this case, the Save Preset option will be greyed-out. If you want to keep the changes you've made to one of those you must use the Save As option.

### 3.2.1.3. Save Preset As...

When you select this option a window appears where you can enter information about the preset. In addition to naming it you can enter the Author name, select a Bank and Type, and select tags that describe the sound, and even create your own Bank, Type, and Styles. This information can be read by the preset browser and is useful for searching the preset banks later.

You can also enter text in the Comments field, which is handy for providing a more detailed description.

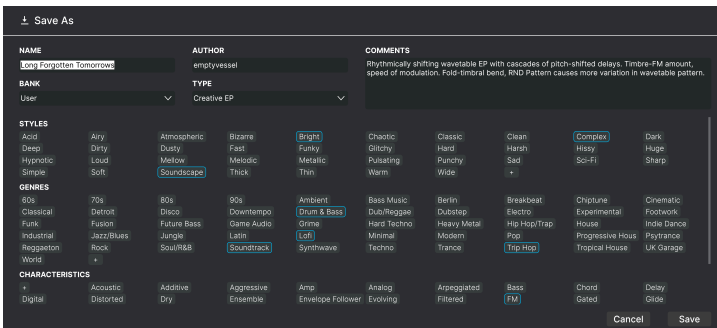


The Save As window

### 3.2.1.4. Import...

This command lets you import a file that was originally exported by Pigments. It can be either a single preset, an entire bank of presets, or a playlist. Presets are stored in the **.pgtx** format, while playlists are given the extension **.playlist**.

After selecting this option the default path to these files will appear in the window, but you can navigate to the folder you prefer to use.

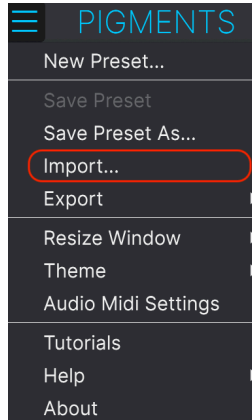


*The Import Preset window*

### 3.2.1.5. Export menu

The Export menu has several options for exporting files from Pigments. These let you share your sounds and playlists with other users. You could also use these options to transfer files to another computer.

#### Export Preset and Export Bank

You can export a single preset using the **Export Preset** command. The default path to these files will appear in the window, but you can create a folder at another location if you like.

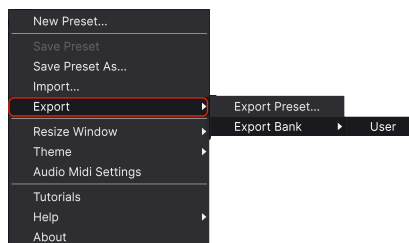


*The Export Preset option*

On the other hand, the **Export Bank** option can be used to export an entire bank of sounds from the instrument, which is useful for backing up or sharing presets.

### 3.2.1.6. Resize Window

The Pigments window can be resized from 50% to 200% of its original size without any visual artifacts. On a smaller screen such as a laptop you may want to reduce the interface size so it doesn't dominate the display. On a larger screen or a second monitor you can increase the size to get a better view of the controls and graphics. The controls work the same at any zoom level but the smaller ones can be harder to see at the smaller magnification values.

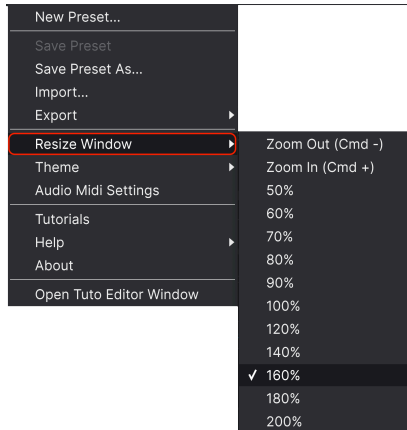

*The Resize Window menu*

### 3.2.1.7. Maximize View

There's an automatic window-resizing feature called Maximize View that will only appear in the [lower tool bar \[p.34\]](#) under certain circumstances. Details are found [here \[p.36\]](#).

### 3.2.1.8. Theme

The theme option selects between classic (dark) and light backgrounds for Pigments. Most of the images in this manual use the dark theme, but the light theme looks like this:



*A new light theme is available as of Pigments 4*

### 3.2.1.9. Audio MIDI Settings

Here you manage the way the instrument transmits sound and receives MIDI. See [Audio and MIDI settings \[p.11\]](#) for full details on this.



### 3.2.1.10. Tutorials

Selecting one of these options will open the right sidebar and lead you on a comprehensive tour of the features of Pigments, created by one of our talented sound designers, Gustavo Bravetti.




For example, the “Sound Generator – Introduction” tutorial will walk you through the different windows of the synth, and the “Modulations” tutorials explain how to assign a modulation to a parameter. Follow the instructions at each step and the tutorial will advance automatically to the next step.



### 3.2.1.11. Help

This menu contains links to both this user manual and FAQs on Arturia’s website.




*The Help menu*

### 3.2.1.12. About

This option will display the software version of Pigments along with the designer credits. Click anywhere inside the Pigments application and this window will close.


### 3.2.2. Preset Browser Overview

The Preset browser can be opened by clicking the toolbar button that has four upright lines. Clicking on the name field in the center of the upper tool bar also lets you quickly select presets by instrument type.



*The Preset browser button is outlined.*

The preview displays towards the lower right give visual feedback about what's going on in each synthesis engine and filter the current Preset employs.

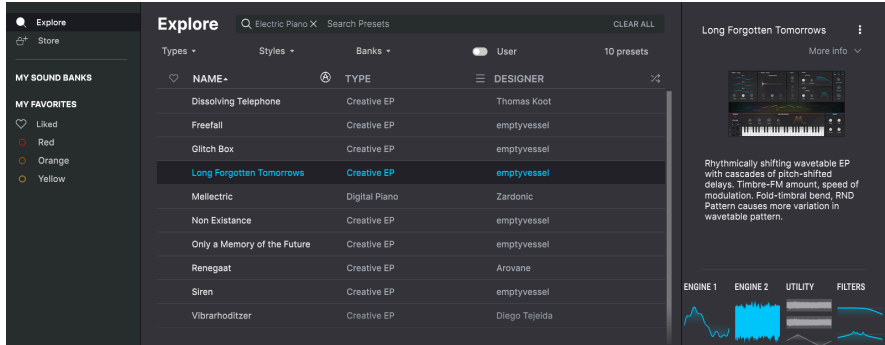

*The full Preset Browser window.*

More details about this window are found in the [Preset Browser \[p.37\]](#) chapter.

### 3.2.3. Play View Button

When the **Play** button near the upper right of the screen is engaged, the new simplified [Play View \[p.52\]](#) is displayed.



*The new Play View, available as of Pigments 4*


This is a streamlined view of the essential controls in Pigments, and contains simplified controls for:

- Both main synth Engines and the Utility Engine
- The Filters
- Amounts for insert effects (FX A and FX B)
- Send for Aux effects
- Central display of the real-time activity of modulation sources
- Keyboard pane with amplitude envelope
- [Macro controls \[p.33\]](#), which actually appear in every view in Pigments

We will go into more detail in the chapter 5, which is dedicated to the [Play View \[p.52\]](#).

### 3.2.4. Synth Panel Button

This displays the main synth panel of Pigments.

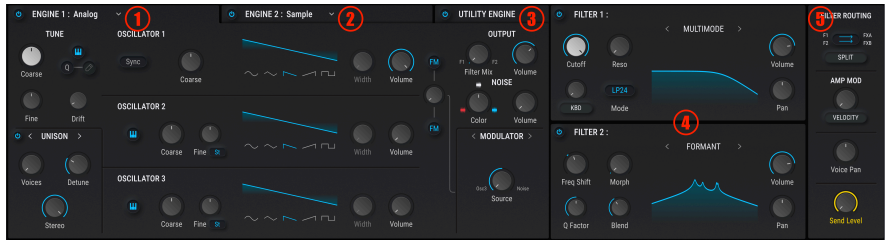


When Synth mode is selected there are five main sections in the top half of the Pigments window:

1. [Engine 1 tab \[p.63\]](#)
2. [Engine 2 tab \[p.63\]](#)
3. [Utility Engine Tab \[p.63\]](#)
4. [Filter section \[p.138\]](#)
5. [Filter Routing/Amp Mod section \[p.152\]](#)

Each of those sections contains its own features and parameters. Details are found in the chapters ahead.

### 3.2.5. FX Panel Button

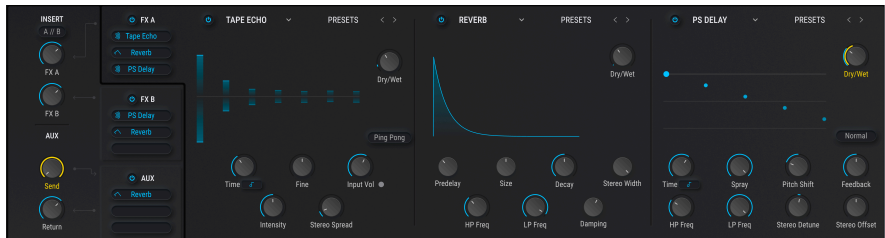

When the FX button is clicked the left side of the window displays the FX section. It contains:

- FX: Bus A tab
- FX: Bus B tab
- FX: Aux Bus tab

These tabs are displayed vertically, with each able to hold up to three independent effects that can be routed in various ways. The FX A tab is shown fully populated in the image above. More details are found in [the chapter dedicated to effects \[p.157\]](#).

Note also that the on/off button next to the FX button in the Upper Toolbar can be used to engage or bypass all effects at once, without losing any of their settings.

### 3.2.6. Seq Button

There is a powerful pattern generator housed beneath the [Seq mode button \[p.184\]](#). It has two modes: Step Sequencer and Arpeggiator.



As with the FX, the adjacent on/off button in the Upper Toolbar can turn the Sequencer/Arpeggiator on or off without you having to go that view.

#### 3.2.6.1. Step Sequencer

Pigments offers a 16-step sequencer in which specific data can be entered, or you can set random pattern generation percentages for parameters such as Pitch, Octave, Velocity, Gate Length, and Slide time. You can even toy with the Trig Probability value for each step in the sequence.

Each parameter track can be set to an independent length (Polyrhythm), and you can specify the number of bars the current settings will be retained before they are randomized again. It's crazy stuff, and the chances that any two sequences will be exactly the same are, well, entirely under your control. There's a more detailed description of the Step Sequencer features [here \[p.196\]](#).

#### 3.2.6.2. Arpeggiator

An arpeggiator allows you to hold down one or more notes and hear those notes played back, one after the other. When a single note is held it will be repeated; when two or more notes are held the arpeggiator will alternate between the notes.


The Step Sequencer and the Arpeggiator have very similar features, except that with an Arpeggiator the Pitch values are defined by which keys you hold down. Octave jumps can still be defined and randomized, so the arpeggios can be as crazy as you want them to be. Follow this link to more information about [the Arpeggiator \[p.195\]](#).

There's a form of Chord arpeggiation too, when the [Unison Chord mode \[p.73\]](#) has been activated for one or both Engines. More details about the Chord modes are available [here \[p.196\]](#).

### 3.2.7. Sound Design Tips view

Accessed by the “light bulb” icon, the Sound Design Tips feature serves two main purposes:

- It identifies parameters and parameter ranges the sound designer enjoyed the most while developing the selected preset.
- It allows you to define and draw attention to your own favorite parameters and parameter ranges within your original presets.



Select any Factory preset and hover the cursor over the light bulb in the upper tool bar, between the Seq tab and the Master Volume control.

As you hover over this button you will see smaller light bulbs pop up in various locations, and the center strip will change to a yellow box with text that provides information about the selected preset. You might also see yellow outlines around certain parameters; these are the ones for which an optimal range was defined by the sound designer.


Select (*Advanced*) *Edit Tips* from the adjacent menu, and you will notice the presence of lit bulbs in various sections of Pigments, depending on where the sound designer of the current Preset inserted tips. Each one of these bulbs invites you to explore the parameters in those sections, which will be both instructive and a lot of fun!

The Sound Design Tips button may already be lit, which means that Sound Design Tips has been enabled globally (i.e., for all presets). To toggle Sound Design Tips on and off, click the button. There's more information about using this innovative feature [here \[p.198\]](#).

### 3.2.8. Master Volume

This is the master volume control for Pigments. Click and drag the knob to select a value within the range of +6 to -70 dB. Double-click the knob to reset the value to -12.0 dB.

A small pair of VU meters can be found to the right of the master volume knob. These meters become orange when signal reaches -12 dB and turn red when 0 dB (clipping) is reached. The clip indicators remain lit for 0.5 seconds.




### 3.2.9. Gear Icon

The icon shaped like a gear at the upper right corner accesses global MIDI channel settings, a powerful MIDI Learn mode, and the Tutorials.

#### 3.2.9.1. Settings Tab

Click **Settings** to access a drop-down menu where you can set the global MIDI receive channel (this applies instrument-wide to all Presets) and make settings for features including microtuning and MPE (MIDI Polyphonic Expression).

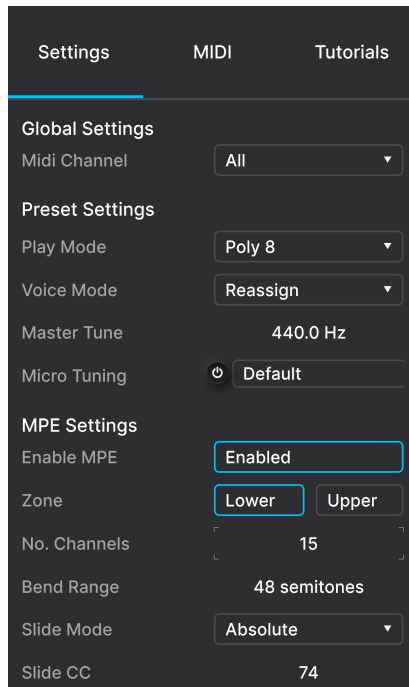

## Preset Settings

These settings are saved at the Preset level as their name implies. They are:

- **Play Mode:** Limits the polyphony of Pigments to conserve CPU resources. There are also two monophonic options:
  - Mono: Envelopes retrigger upon every note played.
  - Legato: Envelopes only retrigger if previous note is released before a new note is played.
- **Voice Mode:** Determines how voices are allocated once a new note is played.
  - Rotate: New notes played will always use a new voice. If all voices are playing, an older voice will be stolen.
  - Reassign: When a voice is used to play a note once, that same voice will be reassigned each time you play that note again.
- **Master tune:** Sets the pitch of middle A, which is 440 Hz by default.
- **Microtuning:** Turns microtuning on and off. The following menu selects microtuning and world tuning presets.

### Tuning Presets

Default

10-TET (A3)

Corrette 3 (A3)

Dudon Baka (A3)

Indian Raga Bageshri (A3)

Indonesian Pelog (A3)

Kellner (A3)

Kirnberg (A3)

Pure Pythagorean (A3)

Scottish Bagpipe (C3)

Werckmeister 3 (A3)

Zimbabwe Mbira (C3)

Load .tun file

Load .scl file...



Pigments now supports MTS-ESP compatibility. If you're using MTS-ESP master in your session, the microtuning settings will be replaced with MTS-ESP settings.



## MPE Settings

Pigments supports MIDI Polyphonic Expression (MPE). This exciting addition to the MIDI protocol allows a multi-dimensional controller to send polyphonic expressive controls (like pitch-bend, aftertouch, or your finger location on the Y axis of a key) on a per-note basis. This is done by using separate MIDI Channels to carry each note's expressive data separately, that can then be parsed by synthesizers like Pigments.

The controls in this let you set the following:

- **Enable MPE:** Turns MIDI Polyphonic Expression mode on and off.
- **Zone:** If an MPE-capable controller can be split into lower and upper zones, this selects which zone sends the MPE messages.
- **No. Channels:** Sets the maximum number of MIDI channels (and therefore simultaneous notes) on which MPE messages may be sent.
- **Bend Range:** - Sets the maximum pitch bend range of each note, up to 96 semitones (48 by default). This should be set to the same value as what is used on your hardware MPE controller.
- **Slide Mode:** - Determines how the slide (sliding your finger toward or away from you on the Y axis of a key) is handled.
  - *Absolute:* The actual position of your finger is sent to Macro 1 within Pigments.
  - *Relative Bipolar:* No matter where the key is initially pressed, the first value sent to Macro 1 will be 64. Then the value will increase if you slide your finger away from you on the key or decrease if you slide it towards you.
  - *Relative Unipolar:* No matter where the key is initially pressed, the first value sent to Macro 1 will be 0. Then the value will increase if you slide your finger away from you on the key or decrease if you slide it towards you.
- **Slide CC:** - Select the MIDI CC number used to send the slide information. By default, this is 74 but you can change it. When MPE is enabled, all the controls that listen to the selected CC will no longer receive it.

### 3.2.9.2. MIDI Learn Tab

Click the **MIDI** tab in the side panel to see MIDI-assignable parameters shown in purple. This means you can map physical controls to those destinations inside the instrument. A typical example might be to map a physical expression pedal to the Master Volume control, a couple of knobs to the Filter cutoffs, or buttons on a controller to the Preset selection arrows.



MIDI Learn mode (top section)

In the image above three of the Macros are red. That means they have already been assigned to an external MIDI control. It can be [reassigned \[p.30\]](#), though.

Note that there are MIDI-assignable parameters inside each of the [Mod source groups \[p.33\]](#) also.



MIDI Learn mode (Envelopes tab)

### 3.2.9.3. Assigning and Unassigning Controls

If you click on a purple area while the **MIDI** tab is selected, you'll put that control into Learn mode. Move a physical knob, fader, or button and the target goes red, indicating that a link has been made between the hardware control and the software parameter. The list at the right of the window shows which MIDI channel and CC is now controlling the parameter, as well as the minimum and maximum values.



The screenshot shows the MIDI settings window with the 'MIDI' tab selected. At the top, there are three tabs: 'Settings', 'MIDI', and 'Tutorials'. Below the tabs, there are two dropdown menus: 'MIDI Controller' set to 'Minilab 3' and 'MIDI Config' set to 'User1'. A 'Learn' button is highlighted with a red border. Below these are two columns: 'MIDI Controller' and 'MIDI Config'. The main part of the window is a table with five columns: 'Ch', 'CC', 'Control', 'Min', and 'Max'. The table lists 16 rows of assignments, each with a MIDI channel (all '1'), a MIDI CC number, a control name, and minimum/maximum values.

Ch	CC	Control	Min	Max
1	16	Macro 3	0.00	1.00
1	17	Macro 4	0.00	1.00
1	18	Macro 1	0.00	1.00
1	19	Macro 2	0.00	1.00
1	72	Env VCA Release	0.001s-	20.0s-ms
1	73	Env VCA Attack	0.00ms-s	20000ms
1	74	F1 Cutoff	20.0Hz	20000Hz
1	75	Env VCA Decay	0.001s-	20.0s-ms
1	79	Env VCA Sustain	0.00	1.00
1	80	Env 2 Attack	0.00ms-s	20000ms
1	81	Env 2 Decay	0.001s-	20.0s-ms
1	82	Env 2 Sustain	0.00	1.00
1	83	Env 2 Release	0.001s-	20.0s-ms
1	91	FX A2 Dry/Wet	0%	100%
1	93	FX A1 Dry/Wet	0%	100%

To unassign a control, simply right-click or ctrl-click it. To leave MIDI Learn mode, click one of the other two tabs or the Gear icon again.

### 3.2.9.4. Minimum and Maximum Values

You often may want to set a physical control to change less than full range of the parameter even though you sweep it through its full travel. This is useful for keeping a volume level, filter cutoff, or LFO depth (for example) in a useful and musical range.

In the list of assignments beneath the **MIDI** tab, drag up and down on any Min or Max value (third and fourth columns) to change it. It is possible to set the maximum lower than the minimum; if you do, this reverses the polarity of the physical controller; i.e. turning it up will turn the assigned parameter down.

In the case of switches which only have two positions (On or Off, Linear or Exponential, etc.), those would normally be assigned to buttons on your controller. But it is possible to toggle those with a fader or another control if you like.

### 3.2.9.5. MIDI Controller Menu

At the top right of the **MIDI** tab is a drop-down menu where you can select templates for many Arturia MIDI controllers. These map physical controls to many “most wanted” parameters in Pigments for a plug-and-play experience. A Generic template is also provided for doing your own assignments.

### 3.2.9.6. MIDI Config Menu

Below the MIDI controller menu is another drop-down where you can manage different sets of MIDI maps for controlling Pigments from MIDI hardware. You can save/save as the current MIDI assignment setup or delete it, import a configuration file, or export the currently active one.

This is a quick way to set up different hardware MIDI keyboards or controllers with Pigments without having to build all the assignments from scratch each time you swap hardware.

Two options in this menu are especially powerful:

- **Default** gives you a starting point with predetermined controller assignments
- **Empty** removes the assignments of all controls

### 3.2.9.7. Relative Controls

Controls on some MIDI controllers can be programmed to send only a few values to indicate the direction and speed at which a knob or fader is moving, as opposed to sending a full range of values in a linear fashion (O-127).

To be specific, a “relative” knob will send values 61-63 when turned in a negative direction and values 65-67 when turned in a positive direction. The turn speed determines the parameter response. Refer to the documentation of your hardware controller to see if it has this capability.

When configured this way, movements of the physical control (usually a knob) will change the parameter by starting at its current setting, rather than snapping to some other value as soon as you start to move it.

This can be a great feature when controlling things like volume, filter, or effect controls, since you won’t usually want them to jump noticeably from their current setting when they are modified.

### 3.2.9.8. Reserved MIDI CC numbers

Certain MIDI Continuous Controller (MIDI CC) numbers are reserved and cannot be reassigned to other controls. These are:

- Pitch bend
- Modulation wheel (CC #01)
- Expression controller (CC #11)
- Sustain (CC #64)
- All Notes Off (CC #123)
- Aftertouch

All other MIDI CC numbers may be used to control any assignable parameter in Pigments.

### 3.2.9.9. The Tutorials Tab

Clicking this tab accesses the in-app tutorials. This is also the tab displayed when you select Tutorials from the [Main Menu \[p.15\]](#).

## 3.3. The Modulation Overview



*Pigments' powerful modulation overview*

The center section of Pigments displays a labeled row of 24 modulation sources and real-time animation of their actions. These are useful in a lot of ways:

- To set up a modulation route using one of those Mod sources, click its name. The [Mod target view \[p.204\]](#) will appear in place of the Modulation overview, along with a list of all active mod routes in addition to the one you are setting up.
- When you hover over one of the Mod source names, a brightly colored ring will appear around the control of any parameters being modulated by that source.
- When you hover over a parameter that is being modulated by one or more sources, those sources will be illuminated in the Modulation overview row.
- As you hover over a parameter control a small + icon will appear. Click it to open the [Mod source view \[p.203\]](#), with 24 sliders that are used to adjust and/or activate the mod routes that affect the selected parameter.
- You can also drag-and-drop a modulation source directly to its destination control in the Pigments interface. Hovering over that destination will then display a pop-up of depth amounts for any source(s) modulating it.

Details about setting up modulation routes can be found [here \[p.202\]](#). There's also a chart that explains what it means when [the outlines and colors around a knob change \[p.219\]](#).

### 3.4. Mod Source Groups

Below the Modulation overview are six tabs which select different groups of modulation sources. After a tab is selected the bottom portion of the Pigments window will display a subset of mod sources, which can then be edited and adjusted in a multitude of ways. Each edit made to these mod sources will affect the destinations to which they have been assigned in the Modulation overview.

Some of the modulation sources are quite simple, such as the virtual keyboard and wheels on the MIDI tab. Others are capable of great complexity, such as the Functions. Each mod source can be routed to one or more parameters, and any parameter can be the target of multiple sources.


Click the links below to learn more about the various Mod source groups.

- [Keyboard tab \[p.223\]](#)
- [Envelopes \[p.226\]](#)
- [LFOs \[p.228\]](#)
- [Functions \[p.230\]](#)
- [Random \[p.237\]](#)
- [Combinate \[p.240\]](#)

### 3.5. Macro Controls

These four controls have source panes in the Modulation Overview row, are always on, and can quickly alter the sound by affecting multiple other parameters at once. The great thing about a Macro control is that it can be assigned to an external MIDI control, meaning you can alter multiple parameters with a single motion.

Assigning a parameter to a Macro is easy: Click one of the panes M1 - M4 and select the destinations [the same way you would for any other mod source \[p.202\]](#), such as an LFO or an envelope.



Names can be entered under each Macro control, so their labels may be different from one preset to the next.


## 3.6. The Lower Toolbar

At the very bottom of the Pigments window there are some great features we want to make sure you don't miss.

### 3.6.1. Parameter description

At the left hand side of the lower toolbar you will see a readout showing the name and a brief description of the control you are modifying. The value of that parameter will be shown near the control itself as you move it.

The current value of a parameter can be shown without editing it; just hover the cursor over the related control and the value will appear nearby.

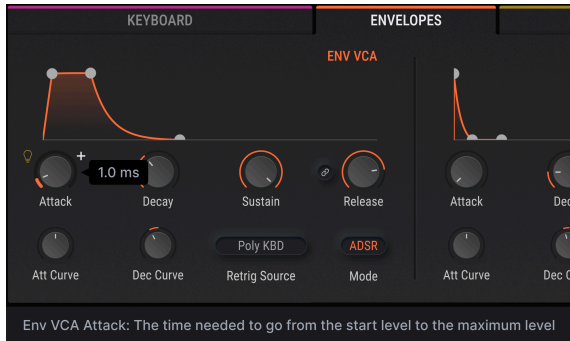

*Displaying the current control's value and description*

### 3.6.2. Play Mode


Duplicated in the Side Panel settings, this menu determines polyphony, which can help to conserve computer processing resources. It also duplicates the Mono and Legato options found in the [Preset Settings \[p.27\]](#) in the side panel.



*Play Mode limits polyphony to conserve CPU*


### 3.6.3. Undo/Redo and History Buttons

Pigments includes Undo and Redo controls to make it easy to help you step through your edits and hear the changes that you've made.



*The Undo, History, and Redo buttons*


To make things even easier, a History button is located between the Undo and Redo buttons. This lists all the changes you made during the current session of Pigments. Clicking on any item in the list recalls the state of all parameters at that moment.

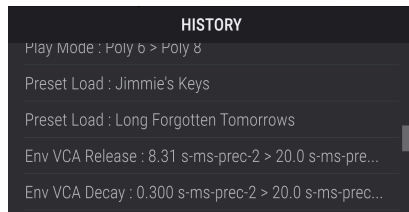

*The Undo, History, and Redo buttons*

### 3.6.4. CPU meter

The CPU meter is used to monitor how much of your computer's resources Pigments is using. The CPU meter will rise as more voices are used, such as when using the [Unison Voice features \[p.87\]](#).




#### 3.6.4.1. Panic Button

The CPU meter is also the Panic button. Click it to send an All-Sounds-Off command to resolve stuck MIDI notes or other issues.



### 3.6.5. The Maximize View Button

If you resize the Pigments window larger and some of its parameters are pushed outside the viewable range of your display, you may see an icon with two blue arrows on the far right side of the lower tool bar.



*The Maximize View button is visible on the right side*

Click it, and Pigments will resize and re-center the window, making the most of your available screen space.


If you still can't see everything at the same time then you may want to select a smaller magnification value using the [Resize Window option in the Main Menu \[p.18\]](#). Naturally there's a balance to be struck: Resizing the Pigments window can prevent the need to scroll the window up and down, but it also may be harder to read some of the smaller text.

## 4. THE PRESET BROWSER

The Preset Browser is how you search, load, and manage sounds in Pigments. It has different views but they all access the same banks of presets.

To access the search view, click the browser button in the Upper Toolbar (the icon looks a bit like books on a library shelf).

The browser has four main areas:

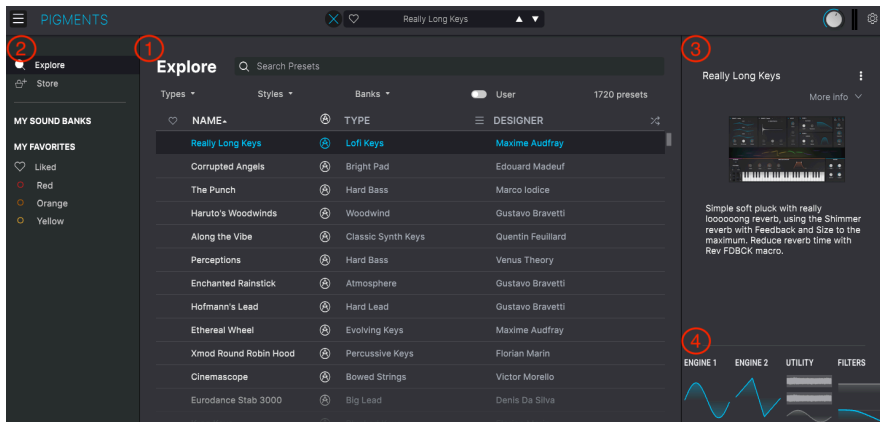


The full Preset Browser window

Number	Area	Description
1.	<a href="#">Search and Results [p.37]</a>	Search presets with text strings, and by tags for Type and Style.
2.	<a href="#">Sidebar [p.43]</a>	Manage banks, Playlists, and Arturia Sound Store purchases.
3.	<a href="#">Preset Info [p.45]</a>	Summary of Bank and Tags, Designer name, and description info for current Preset.
4.	<a href="#">Quick Graphics [p.47]</a>	Handy reference of what's going on in the sound engines and filters.

### 4.1. Search and Results

Click on the Search field at the top and enter any search term. The browser will filter your search in two ways: by matching letters in the Preset name. If your search term is close to that of a [Type or Style \[p.38\]](#) it will include results fitting those tags as well.

The Results list beneath shows all Presets that fit your search. Click the X icon at right to clear your search terms.

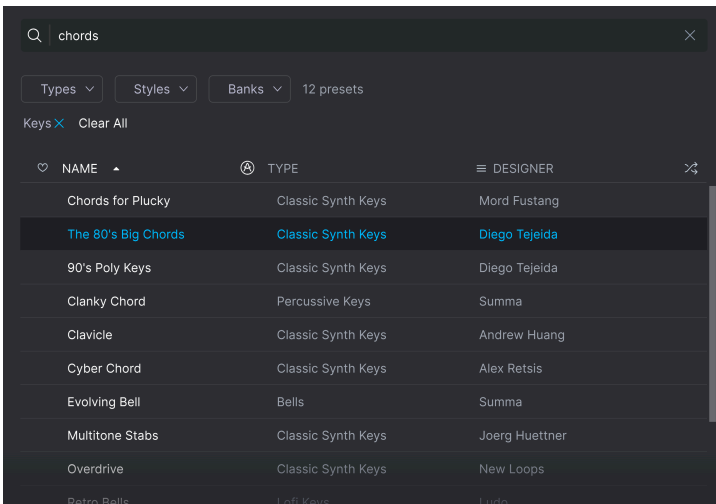


Filter by typing text in the Search field

## 4.2. Using Tags as a Filter

You can narrow (and sometimes expand) your search using different tags. There are two kinds of tags: *Types* and *Styles*. You can filter by one, the other, or both.

### 4.2.1. Types

Types are categories of instruments and musical roles: bass, leads, strings, pads, organs, and more. With a clear search bar, click the **Types** button to bring up a list of types. Notice that each type also has several sub-types:

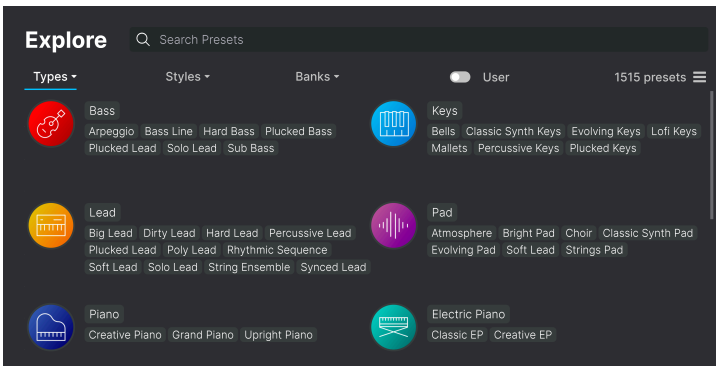


Click any one of them, and the results will show only Presets that match that tag. You can also select multiple Types using command-click (macOS) or ctrl-click (Windows). For example, if you aren't sure whether the preset you're looking for was tagged with Keys or Pad, select both to broaden the search.

Results columns can be inverted by clicking the arrow buttons to the right of their titles (Name, Type, Designer).

### 4.2.2. Styles


Styles are, well ... exactly that. Accessed by the **Styles** button, this area has three further subdivisions:

- *Styles*: General “vibe” such as Atmospheric, Dirty, Clean, Complex, Mellow, etc.
- *Genres*: Identifiable musical genres such as '80s, Trance, Techno, Reggaeton, Disco, etc.
- *Characteristics*: Sonic attributes such as Analog, Evolving, Distorted, Dry, Rise, etc.

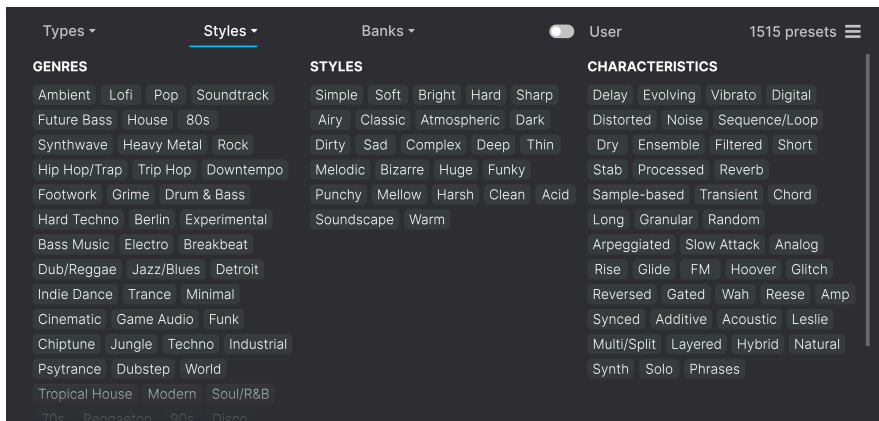

Notice that when you select any tag, several other tags usually disappear. This is because the browser is narrowing your search by process of elimination. Deselect any tag to remove that criterion and widen the search without having to start all over again.

### 4.2.3. Banks

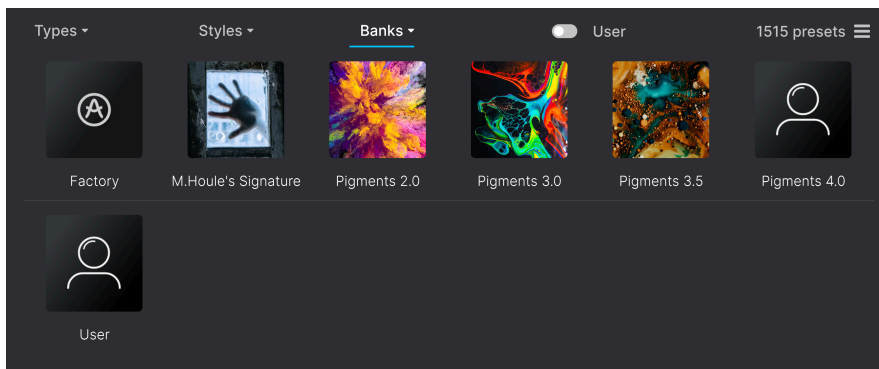


Next to the **Types** and **Styles** buttons is the **Banks** button, which lets you do your search (using all the methods above) within the factory bank or other banks you may have purchased from the Arturia Sound Store.

#### 4.2.4. User Toggle

To the right of the Banks button is a toggle. When engaged, this will display only Presets in User banks, regardless of whether Types, Styles, or Banks is the selected view.

#### 4.2.5. Alternate View

Next on the right is a “hamburger” icon that when clicked, changes to a panes icon that displays a Preset list below the chosen Types, Styles, or Banks. Here’s what this looks like in Styles view:

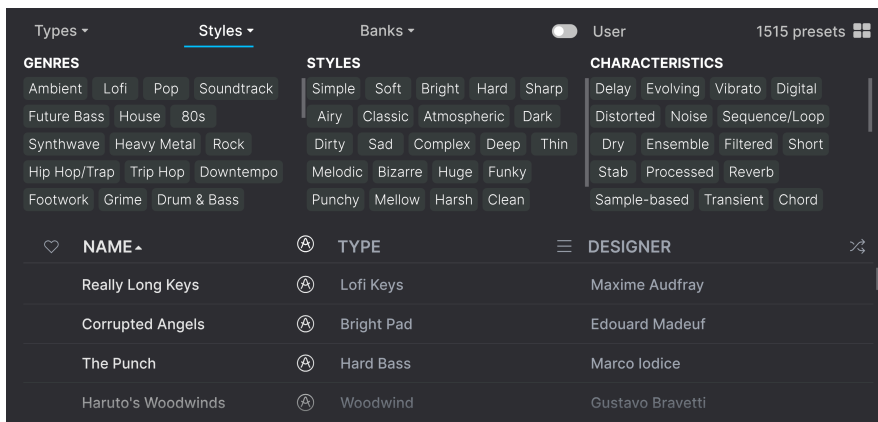


### 4.3. Search Results window

Click the **Show Results** button if you cannot already see your list of results. In the first Results column to specify whether you want to view the presets by **Featured** or by **Name**. Click the sort arrow to reverse the alphabetical order of any column.

#### 4.3.1. Clearing Tags

Just below the Types, Styles, and Banks buttons, you will see labels for all the active tags in a search. Click the X next to anyone to remove it (and thus broaden the results). Click **Clear ALL** to remove all tags.

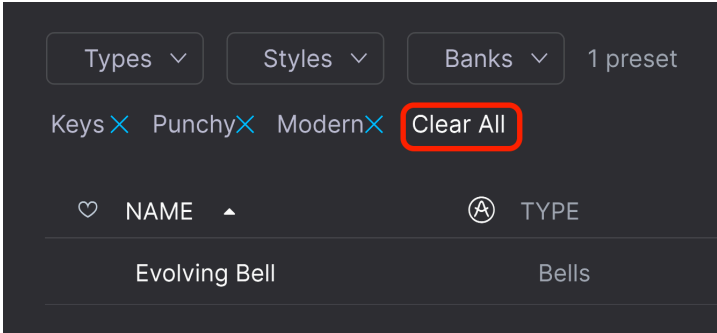


#### 4.3.2. Sorting the Preset Order

Click the **NAME** header in first column of the Results list to sort Presets in ascending or descending alphabetical order.


Click the **TYPE** header in the second column to do the same thing by Type.

The third column has two header options: **DESIGNER** and **BANK**. Click the icon with three lines to choose between the two. Then click either header name as with the other two columns to switch the alphabetical order.

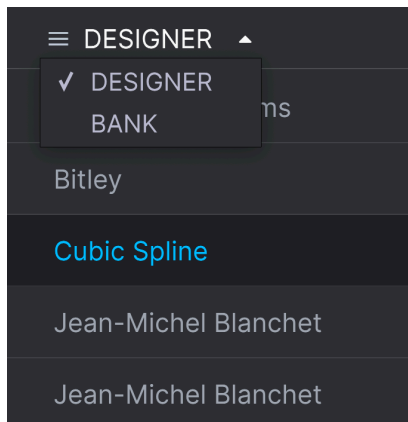


### 4.3.3. Liking Presets

As you explore and create presets you can mark them as Liked by clicking the heart next to their names. later, click on the heart icon to put all of your favorites at the top of the Results list.

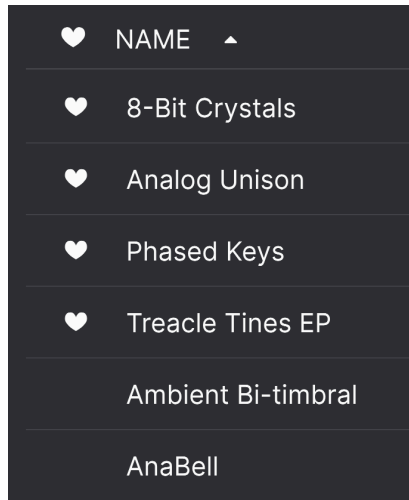

### 4.3.4. Color Coding Presets

Beyond liking a Preset, you can also right-click on its name to bring up the following menu:

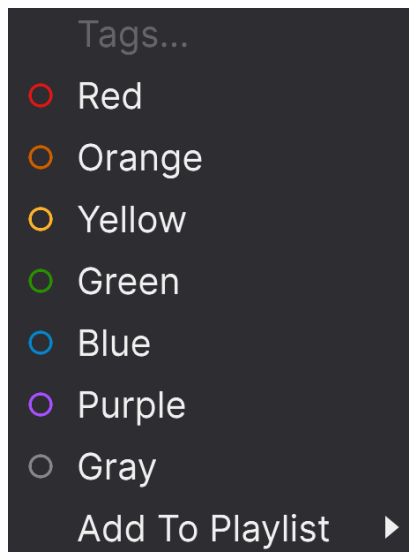


Here, you can assign a color tag to any Preset. You can then access Presets tagged with a given color from the Sidebar.

## 4.4. Sidebar

The leftmost section of the Preset Browser determines what is displayed in the [Search and Results \[p.37\]](#) section.


The top two options are:

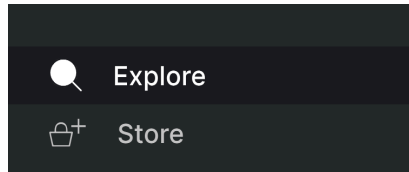

- **Explore:** The default, letting you search the current bank of Presets loaded into Pigments as we did in the previous section.
- **Store:** Browses the Arturia Sound Store for compatible Preset banks, right within the Pigments software.


### 4.4.1. My Sound Banks

This brings up a display of all the sound banks currently installed in Pigments, which is shown in the central results area:

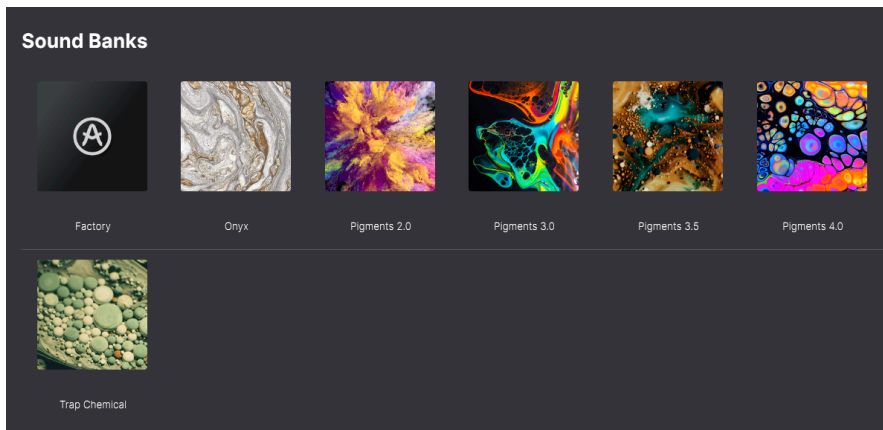




#### 4.4.2. My Favorites

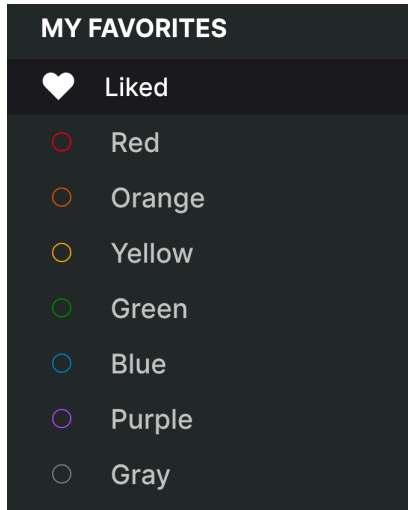

This is where you can restrict Presets shown in the results area to those you have liked or tagged with a color-code.


#### 4.4.3. My Playlists

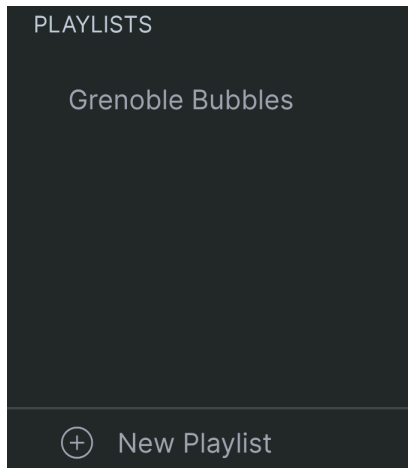

The bottom part of the sidebar displays any Playlists you have created or imported. Playlists are a very powerful management tool for set lists for gigs and the like. Learn more about them in the [Playlists section \[p.47\]](#) below.


## 4.5. Preset Info Section

The right side of the browser window shows specific information about each preset. The information for User presets may be changed here: Name, Type, Favorite, etc.

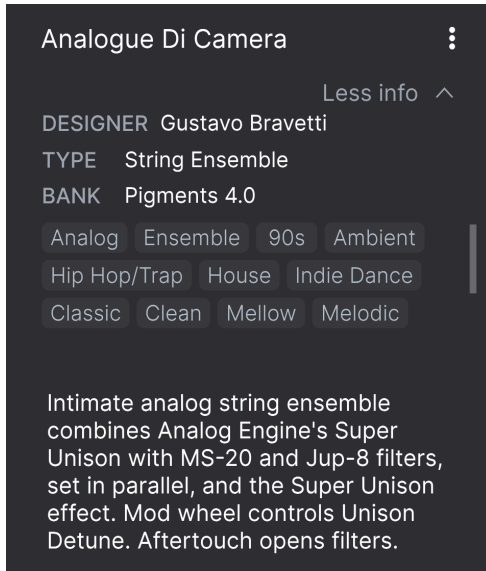


To make the desired changes, you can type in the text fields, use one of the pull-down menus to change the Bank or Type, and click the + sign to add or delete Styles.

Types and Styles changes you make here are reflected in searches. For example, if you remove the "Ambient" Style tag and then save that Preset, it will not show up in future searches for Ambient sounds.



### 4.5.1. Editing Info for Multiple Presets


If you'd like to move several Presets to a different bank while preparing for a performance, or enter a single comment for several Presets at the same time, it's easy to do. Simply hold command (macOS) or ctrl (Windows) and click the names of the Presets you want to change in the Results list. Then enter the comments, change the Bank or Type, etc., and save the preset.

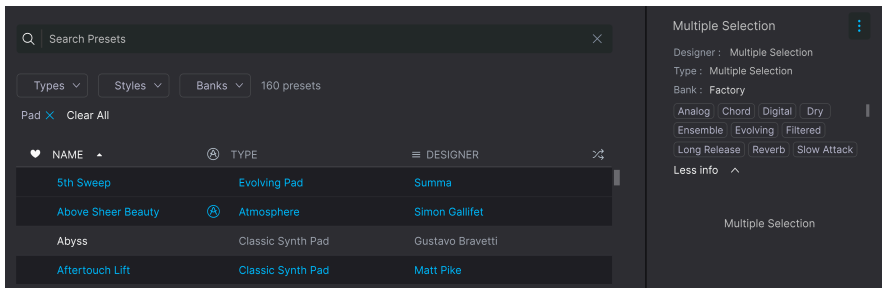

**i** 🎵 If you want to alter the information for a Factory preset you must first use the Save As command to re-save it as a User preset. After this the Info section will gain Edit and Delete buttons at the bottom of the window.

## 4.6. Preset Selection: Other Methods


Click on the Preset name in the center of the upper tool bar to bring up a drop-down menu. The first option in this menu is called All Types, and it brings up a submenu of literally every Preset in the current bank.

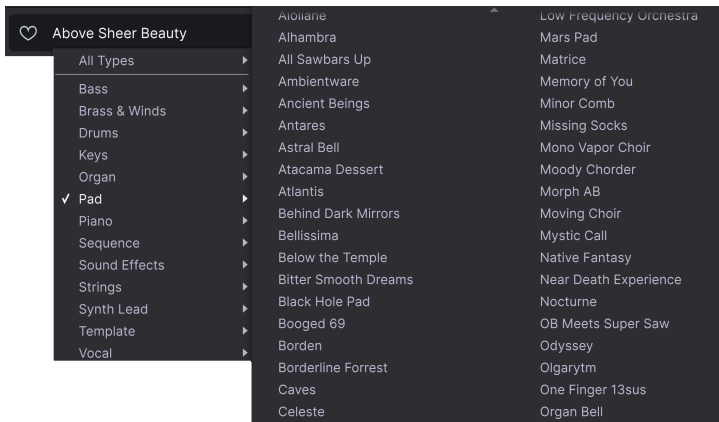

*Filter results may differ based on Search criteria*

Below this are options that correspond to the Type tags. Each of these brings up a submenu of all Presets of its Type.

If you have an active search by Type and/or Style, the up/down arrows to the right of the Preset name will step through only the results that conform to your search.



However, "All Types" in the drop-down menu always ignores those criteria. Likewise for the Type choices below the line – they always include all Presets within that Type.

## 4.7. Quick Graphics



These convenient, animated thumbnails give an overview of the behavior of the two main sound Engines and two main Filters. If an Engine or Filter is inactive, its display is greyed-out.


For the sound Engines, the thumbnails show the waveform and any real-time changes to it. For the Filters, they show real-time changes to the frequency slopes.

## 4.8. Playlists

In the lower left corner of the Preset Browser window is a feature titled Playlists. This is used to collect presets into different groups for different purposes, such as a set list for a particular performance or a batch of presets related to a particular studio project.

### 4.8.1. Add a Playlist


To create a playlist, hover over the **My Playlists** header at the bottom of the sidebar until you see "New+" appear, then click it.

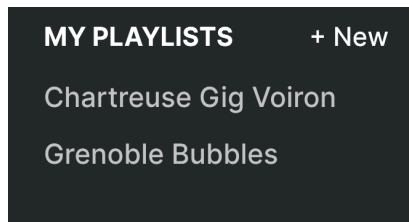

Give the Playlist a name and it will appear in the Playlists menu in the Sidebar.

## 4.8.2. Add a Preset

You can use all of the options in the Explore window to locate Presets for your Playlist. When you find a desired Preset, click-drag it onto the Playlist name.

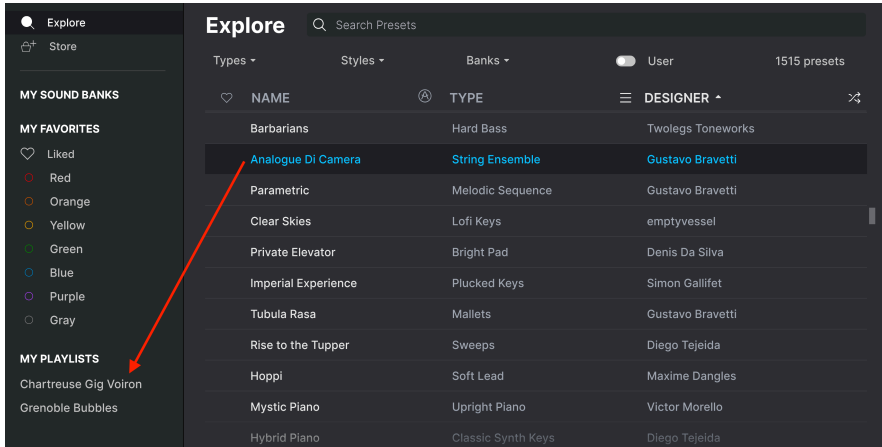


*Click and drag from the Search Results list onto one of the playlists*

To view the contents of a playlist, click on the playlist name.

## 4.8.3. Re-order the Presets

Presets may be reorganized within a playlist. For example, to move a preset from slot 1 to slot 3, drag and drop the preset to the desired location.

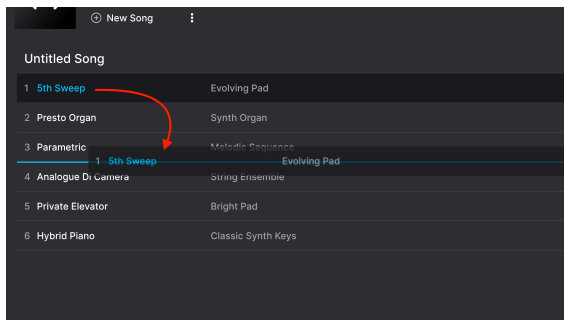


*The blue line indicates you're dragging one Preset between two others*

This will move other Presets up in the list to accommodate the new location of the Preset you just moved.


#### 4.8.4. Preset Management

Right-click on a Preset name inside a Playlist to bring up a pop-up menu.

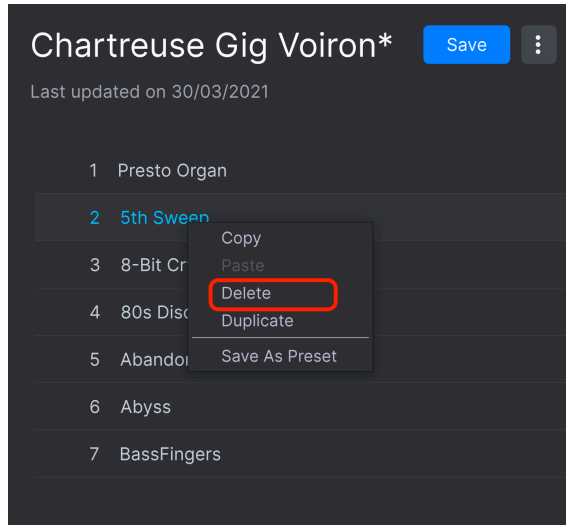

This menu includes rename, Copy, Paste, Delete, and Duplicate options.

#### 4.8.5. Songs in Playlists

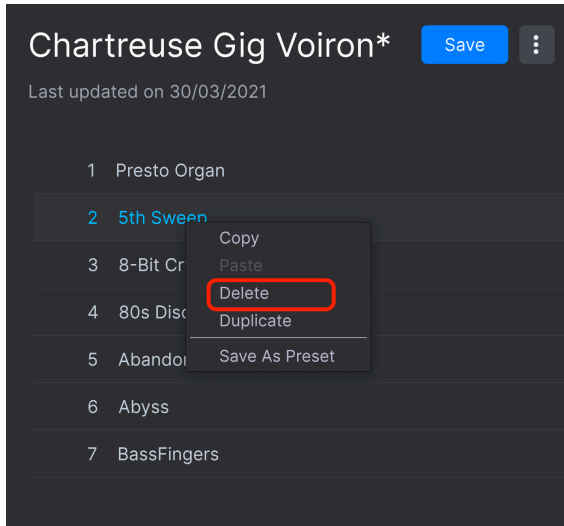


Songs are subgroups of Presets within Playlists. Click on “New Song” to create one; a naming dialogue will appear. You can then reorder Songs using the same click-and-drag method as individual Presets, and the entire group of Presets will show up in the desired place. This is perfect for, say, optimizing your set list for your audience.

Moving a song will not “break up” the Presets in another Song; Songs only move to spaces before or after other entire songs.

You can also right-click on songs to bring up a similar management menu as for individual Presets.

#### 4.8.6. Playlist Management

Select a Playlist, then click on the three-dots icon next to its name in the main Search Results area. This brings up four pull-down options for managing your Playlist.

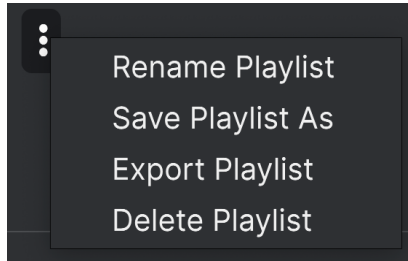

- **Rename Playlist:** Renames the current Playlist without making a copy.
- **Save Playlist As:** Creates a duplicate of the playlist with "Copy" appended to the name. You can change the name before saving.
- **Export Playlist:** Exports your Playlist to a location on your computer, with the filename extension ".aplst."
- **Delete Playlist:** Deletes the current Playlist but does *not* delete any of the Presets in it.

Alternately, right-click on the Playlist's name in the sidebar. This gives you *almost* the same options, except that **Save Playlist As** is replaced with **Duplicate**. This *does* make a copy.




## 5. THE PLAY VIEW

New as of Pigments version 4, the Play View is a simplified interface designed for exactly what its name says: *playing*. It provides all the essential controls for playing and editing Presets, without getting into deeper functions that might be distracting, especially for synth beginners.

Every control in the Play View has a counterpart in the Synth View, so if you change one and switch views, you will then see that change on the other.

### 5.1. Upper Section

Let's divide the Play View into upper, middle, and lower sections. The upper section contains the following control areas:

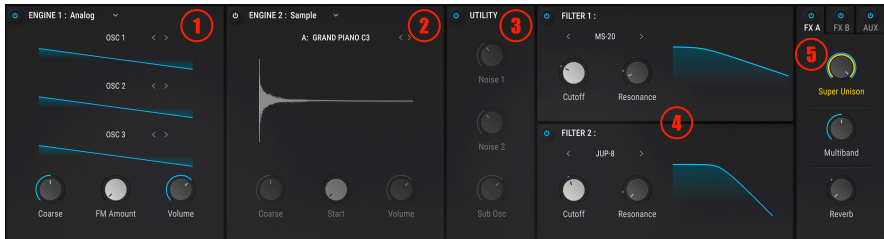

*The new Play View, available as of Pigments 4*

Number	Name	Description
1.	Engine 1	Essential controls for sound Engine 1
2.	Engine 2	Essential controls for sound Engine 2
3.	Utility Engine	Essential controls for the Utility Engine
4.	Filters	Essential controls for both Filters
5.	Effects	Essential controls for FX A, FX B, and the Aux FX bus

**i** ! If a control is greyed-out, this is because whatever section it resides in in the more complex Synth or FX views is turned off.

What can you do in the upper section? Let's take a look.

#### 5.1.1. Turn Sections On and Off


Notice that the upper left corner of any section, for example, Engine 1, has an on/off icon, like so:



On the FX tabs, the icon is directly above their names. Each of these lets you turn its section on or off wholesale, without losing any of the settings in the Play View or in the deeper Synth and FX views.

## 5.1.2. Select the Engine Type

For Engines 1 and 2, you get a choice of four synthesis types. Click on the Engine name to display the menu. It is identical for main Engines 1 and 2.



These are detailed in depth in the [next chapter \[p.63\]](#) but we will go over the basic functions here.

### 5.1.2.1. Analog Engine Controls

Pigment's Analog Engine is a three-oscillator beast!



In its Play View interface the controls work as follows:

- < >: These select the waveform choices for each oscillator.
- **Coarse**: Sets the tuning in semitones of all three oscillators together. This preserves any tuning differences between the individual oscillators as set in the Synth view.
- **FM Amount**: Applies FM to oscillators 1 and 2.
- **Volume**: Sets overall output volume of all three oscillators to the Filters. This preserves any volume differences set between them in the Synth View.

### 5.1.2.2. Wavetable Engine Controls

Developed by PPG in the early 1980s, wavetable synthesis used digitally-stored waveforms. Sound patches contained a series of waves, or a "table," that a sort of sonic pointer could scan through. The position of that pointer could then be modulated, resulting in harmonic motion not possible with the subtractive analog synthesizers of the day.



You can select the wavetable with the < > icons, or click its name above the display to bring up a wavetable browser:




The folder and waveform icons at the top left of the browser import user wavetables as folders or individual files. See the section [Load User Wavetables \[p.83\]](#) for more.

Further controls are:


- **2D/3D Toggle:** The circular icon at the upper right toggles the display between 2D and 3D views.
- **Coarse:** Sets the tuning of the Wavetable Engine in semitones.
- **Position:** Determines the position of the “pointer” along the wavetable. (Remember, this can be a modulation destination!)
- **Volume:** Sets output volume of the Wavetable Engine to the Filters.

### 5.1.2.3. Sample Engine Controls

The Sample Engine in Pigments has six slots. You can populate each with a choice of too many samples to count, making for some truly thick, complex, and even bizarre sounds.

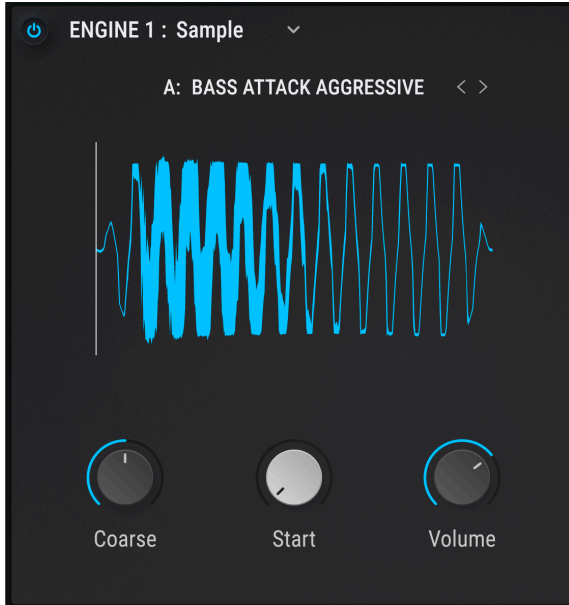

Use the < > icons to step through the samples, or click the name of the sample to bring up a sample browser. The letter at the beginning of the name corresponds to the slot into which you're loading the sample: A through F. In Play view, you can only load samples into the slot that is selected in the more complex [Synth view](#),

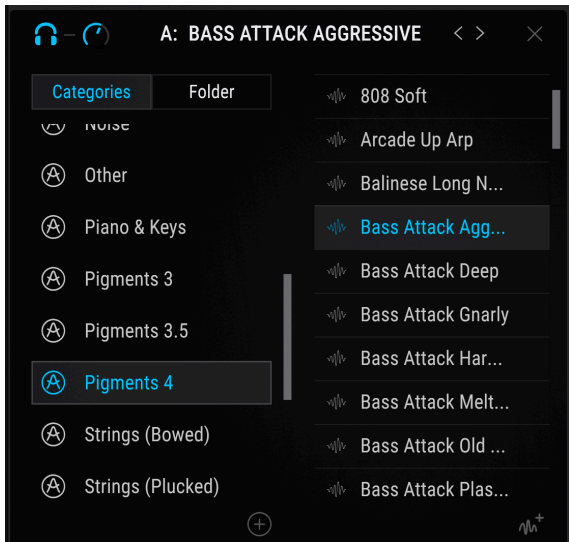

The sample browser contains a **Categories** tab for Factory samples and a **Folder** tab for imported folders. While in the Categories tab, click the waveform icon at bottom right to import a sample file. In the Folders tab, the Folder import icon is at center bottom.


The headphones icon and accompanying volume control at the upper left of the browser allow you to audition samples by single-clicking on a name. Double-click to load the sample.

The Knob controls are:

- **Coarse:** Sets the tuning of the Sample Engine in semitones.
- **Start:** Determines the start position from which the sampled waveform is played back, as represented by a white line in the visualizer display
- **Volume:** Sets output of the Sample Engine to the Filters.

#### 5.1.2.4. Harmonic Engine Controls

Much of traditional synthesis is *subtractive*. You start with a complex waveform full of harmonics and then filter out what you don't want. *Additive* synthesis is the opposite: You add up individual sine waves (a pure sine wave has no harmonics) until you have a precise harmonic profile. The Play interface of Pigments' Harmonic Engine makes the process very simple.

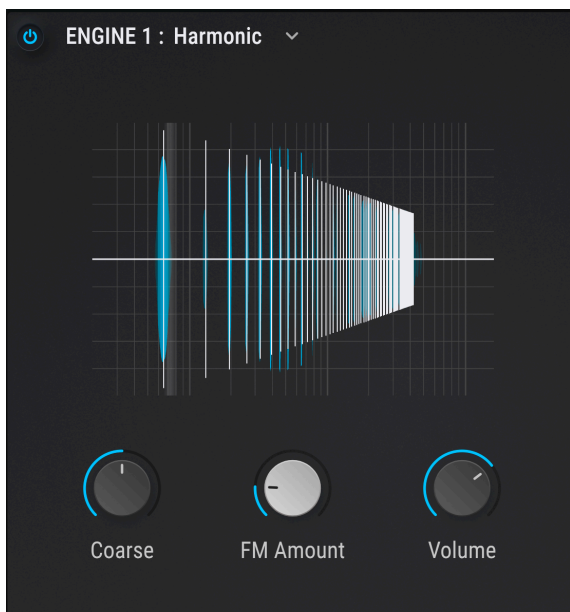


You really do have to get into the [deeper controls \[p.116\]](#) to do much with the actual behavior of the harmonics, but here's what the simplified ones do:

- **Coarse:** Sets the tuning of the Harmonic Engine in semitones.
- **FM Amount:** Determines the amount of Frequency Modulation (or Phase Modulation, if that is what's set in the Synth view).
- **Volume:** Sets overall output of the Harmonic Engine to the Filters.

### 5.1.2.5. Utility Engine Controls

The Utility Engine combines two sample-based noise sources with a single virtual analog oscillator, which we call a sub-oscillator because it works really well for that and you don't have to tie up of the main Engines.

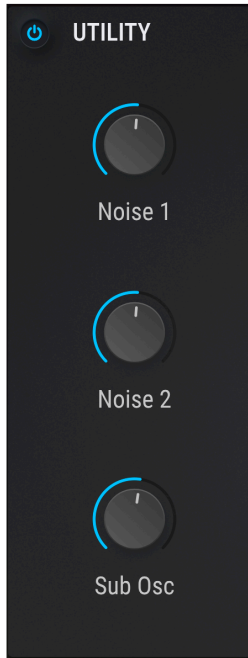


As we'll see in [the next chapter \[p.132\]](#), the "noise" sources really cover a lot of ground such as transients, nature sounds, industrial sounds, and much more. Here, the three vertically stacked knobs simply control the volume of their respective sections.

### 5.1.3. Filter Controls

Pigments offers two identical Filters, described in depth in the [Filters \[p.138\]](#) chapter.

They each offer 11 types and a visualizer of their frequency slope. The types cover precise models of filters on classic synths as well as some creations of our own. You select the types with the < > icons or by clicking the name (e.g. "Multimode") to display this menu:

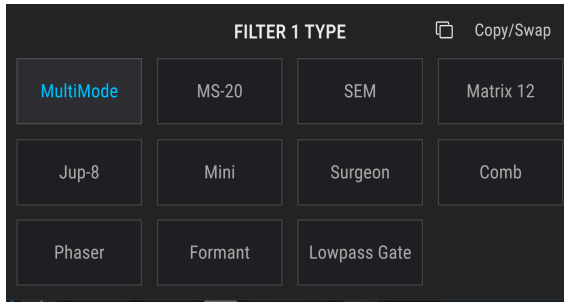

The **Copy/Swap** menu allows you to copy all the settings of the Filter you're working with into the other, or swap the two with a single operation.

What the knob controls do depends on the Filter type selected.

Left Knob	Right Knob	Filter Type
Cutoff	Resonance	Multimode, MS-20, SEM, Matrix 12, Jup8, Mini
Cutoff	Spread	Surgeon
Frequency	Gain	Comb
Cutoff	Feedback	Phaser
Frequency	Morph	Formant
Level	None	Lowpass Gate

Again, check out the [Filter Types and Modes \[p.141\]](#) for detailed descriptions of all the types and what they sound like.




In case you were wondering, the filters can be routed in series or parallel, but those controls are not in the Play View. They're [here \[p.140\]](#).




### 5.1.4. Effects Controls

The Play View gives you very simple controls over effects, essentially letting you adjust the amount – as once you have your effects selection and settings dialed, this is what you would most want to adjust in performance.

Select a bus by clicking its tab. As mentioned earlier, you can also bypass an entire bus (without losing any settings) by using the on/off icons.

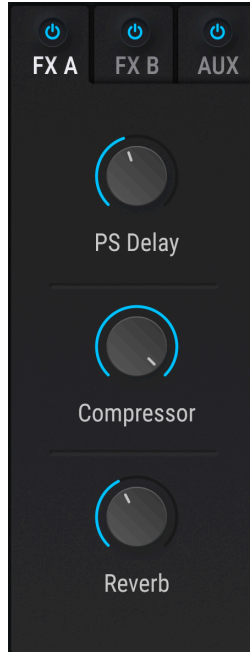


For insert FX busses A and B, each knob controls the dry/wet balance of the effects as arranged top to bottom in the corresponding [tab \[p.157\]](#).

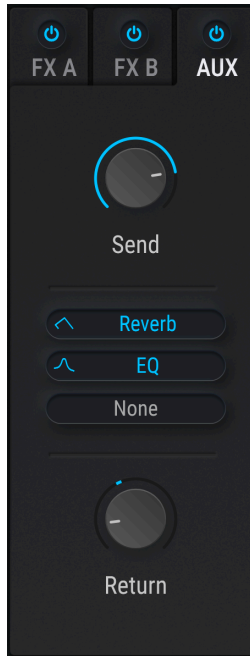

For the Aux FX, which are send based, the knobs control send and return levels for the entire Aux bus. The icons in the center of the stack are bypasses for each individual effect.

## 5.2. Middle Section

The middle section is a visualizer that performs real-time animation of what's going on with all active modulation sources in the current preset.



It is basically a simplified version of the center strip that provides a [modulation overview \[p.32\]](#) in the more complex Synth view.

Left to right, the colors represent the type of modulation source.

- **Pink:** Keyboard and related controls such as pitch-bend
- **Amber:** Envelopes
- **Yellow:** LFOs
- **Green:** Function Generators
- **Purple:** Randomizers
- **Magenta:** Combinators

Specific details about each can be found in the chapter on [modulation sources \[p.223\]](#).

## 5.3. Lower Section

The lower third of the Play View contains the virtual keyboard, pitch-bend and modulation wheels, controls for the VCA amplitude envelope, and the [Macro controls \[p.33\]](#) that are present in every view.

### 5.3.1. Keyboard and Controls




The leftmost section has contains pitch-bend and modulation wheels, plus the following controls:

- **Hold:** Keeps notes held when selected. Ideal for doing sound design but not needing to keep your foot on a sustain pedal.
- **Bend Range:** Separate up and down ranges for the pitch-bend wheel may be set by dragging on these fields. (Try setting a subtle upward range for synth-solo bends but an octave or two downward for "dive bombs!")

On the virtual keyboard itself, clicking near the front edge of the key results in a higher velocity value; clicking near the back of the key produces a softer one.

### 5.3.2. Amplitude Envelope



These knobs control Envelope 1, which is always hardwired to the VCA of Pigments. The VCA controls the output level just upstream of the Filters, and preserves any volume differences between individual Sound Engines, oscillators, sample slots, and the like.

Play a note, and a ball will glide along the envelope visualizer, representing the exact time position of the envelope.

## 6. THE ENGINE TYPES

Hybrid cars have both gas and electric engines, and the better ones offer the best of both worlds: power and economy. Even high-end supercars such as the McLaren Artura (cool name almost) are going hybrid to much fanfare. Pigments 4 is a hybrid supercar among synths, with four main engine types, of which you can use any two at the same time. In addition, a Utility engine is a third sound source with its own tab and available alongside the other two tabs.


Let's look under the multiple hoods of Pigments and learn about these amazing sonic engines.

### 6.1. Common Engine Features

The following Engine tab features are shared by the Analog, Wavetable, Sample, and Harmonic engine types, so we'll cover them up front. To learn about features that are specific to each engine, see the [Analog Engine \[p.71\]](#), [Wavetable Engine \[p.80\]](#), [Sample Engine \[p.100\]](#), and [Harmonic Engine \[p.116\]](#) sections. The [Utility Engine \[p.132\]](#) has fewer features in common but is still quite powerful.


#### 6.1.1. Engine Menu

Click here to reveal a menu that displays the Engine types (Analog, Wavetable, Sample, or Harmonic). The current engine type will be outlined in blue. Make a selection and the menu will close.

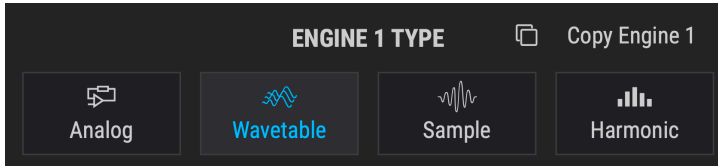

## 6.1.2. Copy Engines

This function is useful if you'd like to copy the work you've done from one Engine to another and then make modifications, or if you'd simply like a temporary backup of something interesting while you keep working in the current Engine. Click the double-document icon to see these options:



**i** ! The copy process could cause the Engine type to be changed, depending on the current settings of the source and destination tabs. But the original oscillator settings will be preserved until the edited preset has been stored to memory.

### 6.1.2.1. Copy to engine X

This choice copies the oscillator settings, including the Engine type and Output settings, from one Engine tab to the other. It will also preserve the oscillator-specific modulation routes that already exist on the *other* Engine tab.

This option is useful if you want to duplicate the oscillator settings and then detune the two Engine tabs slightly, for example. It's a quick way to make a great sound even fatter. However, if you have used modulation settings to affect the oscillators, you may want the next option.

### 6.1.2.2. Copy to engine X with modulations

This option copies all Engine tab settings, including the Engine type and the Output settings, from one Engine tab to the other. The difference is that it also copies all of the oscillator-specific modulation routes. This could be the better option if the modulation settings are having a significant impact on the oscillators.

### 6.1.2.3. Reset engine

This option will clear all settings and reinitialize the engine to its default state.

### 6.1.3. Output Section (All Engines Except Utility)

Every sound engine except for the Utility Engine has an output section with two knobs at its upper right corner.



#### 6.1.3.1. Filter Mix Knob

This controls the balance by which the engine sends routes to Pigments' two filters. All the way counterclockwise, it sends signal only to Filter 1; all the way clockwise, only to Filter 2. At 12 o'clock, the signal is going to both filters evenly.

The master [Filter routing control \[p.152\]](#) can have an impact here. If Filters 1 and 2 are routed in series at all, the output of Filter 1 will pass through Filter 2 to some degree.

#### 6.1.3.2. Volume Knob

This knob simply controls the overall output volume of the engine. When using the Sample, Wavetable, or Harmonic Engine, this will include the Modulator (modulation oscillator) if its own volume knob is turned up.

**i** When performing [cross modulation \[p.127\]](#) between two engines, you can turn the volume of the source engine down to hear its effects on the destination engine only.

### 6.1.4. Engine On/Off Button

It's easy to construct some very complex presets when both Engine tabs are layered together. If you'd like to isolate one of the Engines to adjust its settings, all you have to do is click the On/Off button for the other Engine tab. It isn't necessary to select the other tab first.

When the visible contents of a tab are gray, that Engine has been muted. To re-enable an Engine tab, click the Engine On/Off button again. The text and icons are lit when an Engine is active, so you'll know at a glance whether that is the case or not.

## 6.1.5. Engine Tune



*Tuning controls for the Analog Engine in Pigments*

The controls in this section adjust the tuning for the selected Engine. This means different things depending on the Engine type:

- Analog Engine: Changing the coarse/fine tuning affects all three oscillators simultaneously.
- Wavetable Engine: Changing the coarse/fine tuning affects all positions of the selected wavetable.
- Sample Engine: Changing the coarse/fine tuning affects all loaded samples simultaneously.
- Harmonic Engine: A change in the coarse/fine tuning affects the fundamental pitch and all partials (harmonics) simultaneously.

**i** You can have any combination of engines, or two of the same kind, between the two tabs. Changing engine types on a tab will not affect the tuning settings.

### 6.1.5.1. Coarse Tune

Turn this knob to tune the engine chromatically (i.e., in semitones). For the Analog, Wavetable, and Harmonic engines, the range is  $\pm 60$  semitones (five octaves). For the Sample engine, the range is  $\pm 36$  semitones (three octaves).

### 6.1.5.2. Mod Quantize

As with most Pigments parameters, tuning can be modulated by any source. What's unique here is the ability to modulate the pitch according to the specific notes you want to hear. The Quantize Mod feature will filter out the pitches you don't want the modulation source to produce.

To enable this feature, click the Q icon next to the Coarse control. To select specific notes, click the pencil icon to reveal the pop-out "mini-keyboard." All 12 notes in the chromatic scale will be active by default:



A lit key indicates an active note. Click the keys to make them active or inactive. The first note on the mini-keyboard cannot be disabled because it's the root. Though the pop-up keyboard looks to be in the key of C, Quantize Mod transposes the intervals relative to whatever notes you play.

Another about the quantization is that it may seem "lumpy" at first when one or more notes on the Mod Quantize keyboard are disabled. Consider this example, using the Mod wheel as the modulation input and a modulation amount of O.11 (an octave):

CC #1 value	Chromatic scale	Harmonic minor scale
0-10	C	C
11-20	C#	C
21-30	D	D
31-39	D#	D#
40-49	E	D#
50-59	F	F
60-69	F#	F
70-79	G	G
80-89	G#	G#
90-98	A	G#
99-108	A#	B
109-118	B	B
119-127	C	C



As you can see, while the pitch would change between the values of 10 and 11 in a Chromatic scale, for example, it remains the same for a harmonic minor scale. This is the result of quantization: Certain ranges of values will produce no change until the next allowable output is reached. It's the same with an LFO or any other modulation source – the values will be reached, but they may not be evenly spaced.

Follow this link to learn how to [set up modulation routes \[p.202\]](#).



♪ The Quantize Mod feature only affects the modulation output when a source is routed to the Coarse tuning parameter of the selected Engine. It does not stop incoming MIDI notes from being recognized.

### 6.1.5.3. Fine Tune

This control adjusts the tuning in smaller increments (0.008, or 8/1000ths of a semitone). The range is +/- 1 semitone.



♪ Hold the Control key or right-click while turning the Fine knob for even smaller tuning increments of 0.001.


### 6.1.5.4. Key Track

When Key Track (the small keyboard icon) is engaged, the Engine follows the note played on keyboard. If Key Track is disengaged, the Engine will play C3 regardless of the note pressed. Only the Coarse and Fine parameters have an effect on the pitch if Key Track is disengaged.

### 6.1.5.5. Drift [Analog Engine only]

The Drift knob adjusts the amount of variation that happens in the tuning and phase of each oscillator every time a new note is played. The effect can be very subtle, or it can imitate the sound of uncalibrated or unstable vintage analog oscillators. At zero, the tuning and phase of all three oscillators are perfectly matched.

### 6.1.5.6. Filter (Sample Engine only)




*Tuning controls for the  
Sample Engine*

The Filter knob in the Sample Engine's tuning section controls a dual low-pass / high-pass filter. At 12 o'clock, the filter lets all signals pass through without any effect. Turning the knob clockwise increasingly high-pass filters the loaded samples whereas turning the knob counter-clockwise increasingly low-pass filters the samples. Use this to brighten or darken the sound of your samples.

### 6.1.6. Unison/Shaper (All Engines)

At the lower left of the engines, you can find a section providing ways to modify the engine's behaviour. Several modes are available, each with a different operation mode and resulting effect on the sound.

 Increasing the number of Unison Voices also increases the impact Pigments has on the CPU of your computer.



However, this is no simple unison mode! It has different twists depending on the selected Engine, which you can select via the < > icons or clicking on the name at the top of the pane to bring up a menu, like this one for the Sample engine:

#### *Tuning controls for the Analog Engine*

The following table (well, we like the word "matrix") summarizes what Unison/Shaper modes you get in three of the Engines and what parameters are available depending on the Engine. The Engine type and then the modes are along the horizontal axis of the table; while the parameters for each mode are along the vertical. "N/A" means that particular Shaper mode is not available for the selected Sound Engine.

Engine Type	Unison	Chord	Super	Resonator	Bitcrush	Modulation
Analog	Voices, Detune, Stereo	Voices, Chord, Stereo	Mix, Detune, Stereo	N/A	N/A	N/A
Wavetable	Voices, Detune, Stereo, Phase	Voices, Chord, Stereo	Mix, Detune, Stereo	N/A	N/A	N/A
Sample	Voices, Detune, Stereo, Phase	Voices, Chord, Stereo	Mix, Detune, Stereo	Coarse, Dry/Wet, Inharmonicity, Resonance	Decimate, Bit Depth, Keyboard Tracking On/Off	Freq and Mod amounts, Ring Mod

Since the Harmonic Engine's modes and parameters are so different, we will explain those in [its own section \[p.123\]](#) further on. Likewise, we will explain in individual parameters in each Engine's section.

## 6.2. The Analog Engine



*The Pigments Analog Engine*

If there's anything Arturia knows how to do well, it is to emulate the characteristics and behavior of the most beloved analog synthesizers of all time. And with the Pigments Analog engine we have taken the favorite features of all of those synthesizers and included them here in one instrument.

### 6.2.1. Analog Engine Tuning

A change in the coarse/fine tuning affects all three oscillators simultaneously. See the Common Features section for details about [the tuning controls \[p.66\]](#).

## 6.2.2. Analog Unison Mode

As first mentioned in the preview on the [Unison and shaper \[p.70\]](#) common to all engines, the Analog Engine's Unison section offers three modes:

### 6.2.2.1. Unison [Classic] Mode



This is the sort of unison-detune found in many polyphonic analog synthesizers of the past. All of the unison voices are centered around a single note and tuned above and below that pitch as the detuning amount is increased.

- **Voices**

Selects the number of voices (up to 8) that will be triggered by a single MIDI note.

- **Detune**


Controls the pitch distance between the voices in cents, with a maximum range of one octave (+/- 6 semitones from the center). Additional voices will fill in the space between the two extremes.

If the Unison Voices parameter is set to an even number (2, 4, 6, or 8), all voices will be tuned above or below the center pitch. If the Unison Voices parameter is set to an odd number (3, 5, or 7), one of the voices will remain at the center pitch and all others will be tuned above and below the center. It is also possible to set non-integer values; this will interpolate between these two behaviors.

- **Stereo**

As the value increases the stereo spread of the unison voices will increase. Additional voices will fill in the space between the two extremes.

### 6.2.2.2. Chord Mode

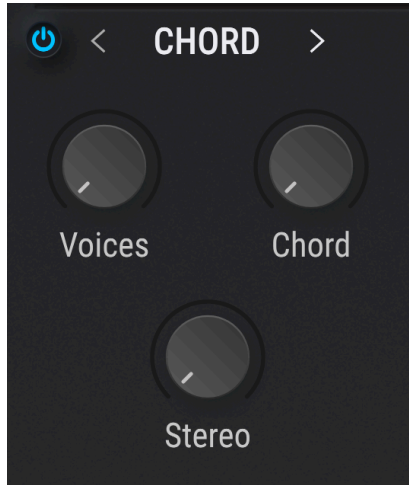

With the Unison Chord feature the pitch of the unison voice will be quantized in semitones to match one of 12 classic chord shapes. The greater the number of unison voices used, the richer the chord will be.

- **Voices**

Selects the number of voices that will be triggered by a single MIDI note. Up to 8 voices may be used.

- **Chord**

Use the knob to select one of the 12 chord shapes.

As the Unison Voices value increases, more voices will be added above the root pitch. However, some of the more complex chords will require more voices in order to be fully represented. For example, the 5 and Oct chords only require two voices for every note to be present (though you can use more). On the other hand, the 6/9 chord requires four voices for every note in the chord to be present (though you can use fewer, if you like).

- **Stereo**


As the value increases the stereo spread of the unison voices will increase. Additional voices will fill in the space between the two extremes.



Each Unison Detune voice will be equally affected by the various waveform transformation and modulation processes (Wavefolding, Phase Distortion, etc.)

### 6.2.2.3. Super Mode

This unison detune voice mode lets you beef up your oscillator in the style of the famous “JP” supersaw.

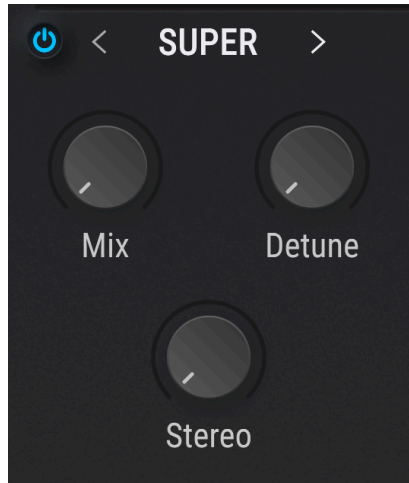

- **Mix**


Sets the mix of Unison voices.

- **Detune**

Controls the pitch distance between the voices in cents, with a maximum range of one octave (+/- 6 semitones from the center). Additional voices will fill in the space between the two extremes.

- **Stereo**

As the value increases the stereo spread of the unison voices will increase. Additional voices will fill in the space between the two extremes.

 In the Sample Engine, Unison is one of four [Shaper modes \[p.112\]](#) found in this section of the window.

### 6.2.3. Oscillators

The Analog engine offers a triple-oscillator design similar to the most famous compact analog synthesizer ever produced. True to form, similarities exist in the features of each oscillator, but there are also some important distinctions.

#### 6.2.3.1. Osc 1

Control	Description
Sync	Hard sync the wave cycle of Oscillator 2 to Oscillator 1 for interesting timbres.
FM	Applies frequency modulation (FM) from the modulation section to Oscillator 1.
Coarse Tune	Adjusts the tuning of the oscillator in semitones without affecting the other oscillators.
Waveform	Use the buttons to select Sine, Triangle, Saw, Ramp, or Square. The window acts as an oscilloscope.
Width	Alters the pulse width of certain waveforms (triangle and square only).
Volume	Adjust the output volume of Osc 1 relative to the other oscillators.

#### 6.2.3.2. Osc 2

Control	Description
Key	Determines if the oscillator pitch tracks the MIDI note number or remains fixed (unless modulated).
FM	Applies frequency modulation (FM) from the modulation section to Oscillator 2.
Coarse Tune	Adjusts the tuning of the oscillator in semitones without affecting the other oscillators.
Fine Tune	Allows fine-tuning of the oscillator without affecting the other oscillators.
Waveform	Use the buttons to select Sine, Triangle, Saw, Ramp, or Square. The window acts as an oscilloscope.
Width	Alters the pulse width of certain waveforms (triangle and square only).
Volume	Adjust the output volume of Osc 1 relative to the other oscillators.




### 6.2.3.3. Osc 3

Control	Description
Key	Determines if the oscillator pitch tracks the MIDI note number or remains fixed (unless modulated).
Coarse Tune	Adjusts the tuning of the oscillator in semitones without affecting the other oscillators.
Fine Tune	Allows fine-tuning of the oscillator without affecting the other oscillators.
Waveform	Use the buttons to select Sine, Triangle, Saw, Ramp, or Square. The window acts as an oscilloscope.
Width	Alters the pulse width of certain waveforms (triangle and square only).
Volume	Adjusts the output volume of the oscillator relative to the other oscillators.


### 6.2.3.4. Fine Tuning Modes

The Fine Tune knobs in oscillators 2 and 3 have drop-down menus that show two options.

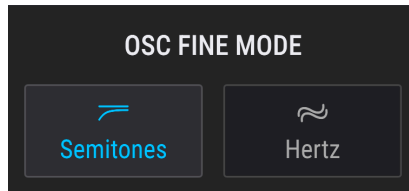

- **Semitones:** Variance from the coarse tuning setting is set in decimal fractions of a semitone.
- **Hertz:** Variance from the coarse tuning setting is set in Hz (cycles per second).

## 6.2.4. Noise Section

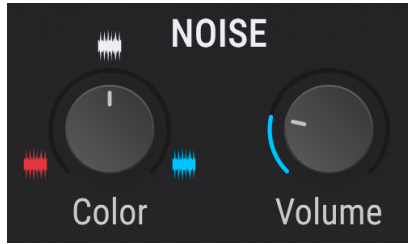

A noise source can be useful in many ways when building a sound. Depending on the modulation settings, it can help add breathiness to a pad, provide a gritty character to a bass, or put a "chiff" on the attack of a sound.

### 6.2.4.1. A Source of Many Colors

The noise source in Pigments is very flexible, and can produce many different "colors" of noise ranging from Red (low-pass filter applied) to White (no filter) to Blue (high-pass filter applied). Use this control the dial in the precise tonality of the noise source.

## 6.2.5. Modulator



This modulation component affects only Oscillators 1 and 2. The knob on the right crossfades between Osc 3 and Noise as the modulation source. These can in turn apply FM to oscillators 1 and 2 of the Analog Engine.

### 6.2.5.1. Modulation Amount

Increasing the value of this control above zero will introduce modulation to Osc 1 and Osc 2. The higher the amount, the more extreme the modulation will be. You can turn off modulation for either oscillator by clicking the **FM** buttons above and below the knob.

### 6.2.5.2. Modulation Source

When set fully counter-clockwise the modulation source becomes the pure waveform from Osc 3. In this case its range can be from 1Hz (cycle per second) to 20kHz, depending on the Key tracking, Coarse, and Fine tune settings of Osc 3.

When set fully clockwise the modulation source is 100% noise. Noise modulation is affected by the "color" of the Noise source. A fully "blue" noise will introduce mostly high-frequency modulation, while a fully "red" noise will provide mostly low-frequency modulation.


### 6.2.5.3. Other Engines as Cross Modulation Source

Alternately, you can click the "MODULATOR" label to use the other main Engine (but not the Utility Engine) as an alternate modulation source for the current engine, like so:



The resulting controls are a bit different depending on the type of engine selected, so we cover this in its own section on [Engine Cross Modulation \[p.127\]](#) later in this chapter.

## 6.3. The Wavetable Engine

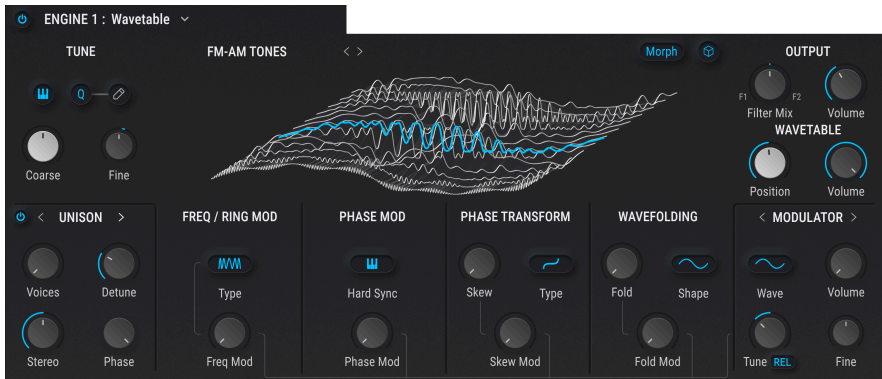

*The Pigments Wavetable Engine*

Arturia's expertise not only includes the emulation of existing instruments, but also enhancing them in ways that could not have been realized with the technology of the time. This is true of every Arturia V instrument, and it is no less true of our new Wavetable engine.

Wavetable synthesis offers a lot of interesting options that an ordinary oscillator cannot provide:

- Up to 256 positions exist in each wavetable
- Each position holds a waveform containing 2048 samples
- Any modulation source can be used to select waveforms from the wavetable, including synced LFOs
- The transition between the waveforms can be instantaneous or gradual (i.e., 'morphed')

Pigments also allows you to [load your own wavetables \[p.83\]](#), which means the possibilities are limitless. The wavetables must meet the criteria defined in that section.


### 6.3.1. Wavetable Viewer

The Wavetable engine type contains a window that shows the wavetables in two or three dimensions. The wavetable positions can transition smoothly or incrementally as the Position control is turned; just toggle the Morph button.

You can also click/drag inside the Wavetable viewer window to change the wavetable position. The Position control will also turn as you do this. But depending on the wavetable, it may be harder to see what is happening when Morph is Off and the Wavetable viewer is set to 3D.

The 3D view has the advantage of showing you all the different waveforms in the current table. Whereas the 2D view shows one wave at a time, it will show the effects of all the different "wave-mangling" options the Wavetable Engine offers.

### 6.3.2. Morph and View Buttons

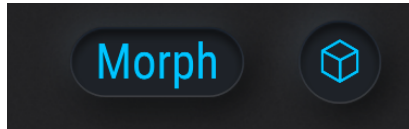

*The Wavetable Morph button*

Transitions between wavetable positions will occur smoothly when the Morph feature is enabled. When it is disabled the transitions will be immediate. This is how the wavetable will behave whether you are adjusting the Position knob with the cursor or modulating it from one of the [modulation sources](#) [p.202].

To enable or disable Morph, toggle the Morph button. When the button is outlined in blue, it is active.

To the right of the Morph button is a small icon that toggles that main wavetable viewer between 2D and 3D views.


### 6.3.3. Wavetable Selection Menu

There are three ways to select a new wavetable. All involve the Wavetable name field.

1. Use the previous/next arrows on the right side of the wavetable name for adjacent choices. This will cross into an adjacent wavetable bank when the first or last wavetable of the current bank has been reached.
2. Click the wavetable name and make a selection from one of the Factory wavetable banks using the Wavetable Browser. The current selection will be highlighted.
3. Use the Wavetable Browser to [import one or more wavetables](#) [p.83] from a different source.

### 6.3.4. Wavetable Browser

If you click on the wavetable name in the [Wavetable viewer \[p.80\]](#) a window will open to display the Wavetable Browser.

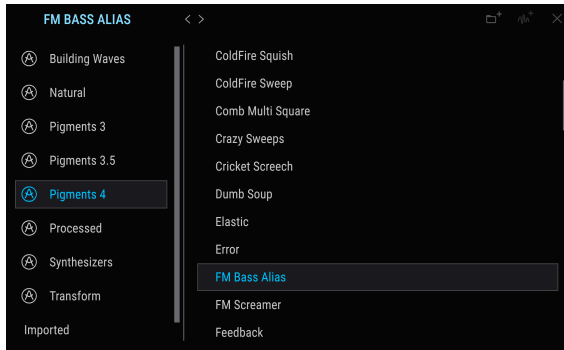

*The Wavetable Browser in Pigments 4 includes a folder with over 60 new wavetables*

#### 6.3.4.1. Selecting Wavetables

The left column shows the wavetable folders. Factory folders are displayed with Arturia's logo in their tabs. These cannot be deleted. Pigments 3 features a new folder of its own, containing all the new wavetables in this version.

Scroll up and down to view the wavetables inside the current bank. There are two ways to select a wavetable:

- A single click selects a wavetable without closing the browser window, which allows you to audition wavetables one after the other.
- If you find the one you want to keep, double-click its name and the browser window will close.

You can also select a different bank on the left side and then audition or choose a wavetable from that bank the same way.

To close the browser window, click the X .


You can also [import individual wavetables and entire banks of wavetables \[p.83\]](#).

### 6.3.4.2. Load User Wavetables

Pigments supports loading your own wavetables, either one at a time or in entire banks. To do either one, click on the wavetable name to open the Wavetable Browser.

#### Load a Bank

To load an entire bank of wavetables, click the folder icon inside the Wavetable Browser window.

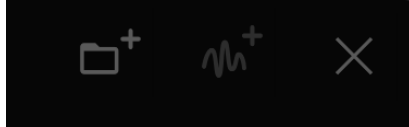

*The Wavetable Bank Import (left) and Individual Wavetable Import (right) buttons*

After your wavetable folder has been imported it will show up at the bottom of the bank list, below the Factory banks and the Imported bank. (We'll explain that bank next.)

#### Load a Wavetable

In order to import an individual wavetable or sample (.wav) you first need to select a non-factory wavetable bank. Otherwise the Load Wavetable button will not be available. This button is just to the right of the Import Folder button, shown above.

Click this button and navigate to the folder that contains the wavetable or sample you would like to import. After it has been imported it will appear inside the wavetable list for the bank you selected.

You can choose to add the wavetable to the Imported bank or to one of your own banks. Just select the one you want to use before you click the Wavetable Import button.

**i** If you're going to be importing several wavetables for a particular project or from a particular source, you can create an empty folder for them first by clicking the Wavetable Bank Import button and then using the New Folder button supplied by your computer's operating system. Then add your wavetables to that folder one at a time using the Wavetable Import button.




### 6.3.4.3. Wavetable Requirements

When you start experimenting with your own wavetables, here are some guidelines that will help achieve the best results:


- 2,048 samples per single-cycle waveform (i.e., position)
- Maximum of 256 positions

You can also load in a regular WAV file and Pigments will parse it into a wavetable for you. The first 2,048 samples will be placed in position 1, the second 2,048 samples will be placed in position 2, and so on, until the maximum of 256 positions has been filled. Only the first 524,288 samples will be used ( $256 \times 2,048 = 524,288$ ).

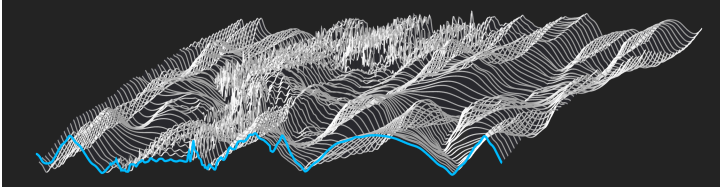

*A WAV file parsed into 256 positions as a wavetable.*

If you load a file shorter than 524,288 samples, Pigments will only divide it into as many positions as is necessary to “use up” those samples. For example, a file containing only 16,384 samples would be divided into eight positions ( $8 \times 2,048 = 16,384$ ). This leaves you with fewer positions to move between using modulation sources, but that’s not necessarily a bad thing. You could use a modulation source, for example, to switch rapidly between the positions for a dramatic pulsating effect.

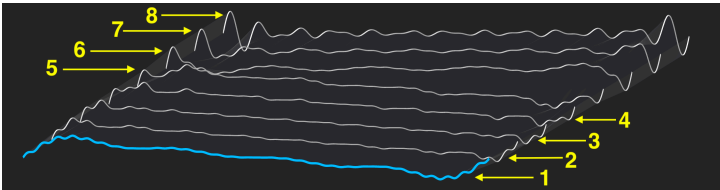

*Using only 8 positions of a wavetable.*

Remember, the wavetables can morph between the positions, move through them sequentially, or jump around depending on the setting of the Morph button and the modulation sources that you choose.

Follow this link to learn how to [set up modulation routes \[p.202\]](#).




⚡ A 256-frame wavetable has exactly 524,288 samples. Some audio editors such as [Audacity](#) can display the exact number of samples in the file. A tool like that is also handy for carving out sections of larger samples and placing them end-to-end to create your own wavetable. For best results, stick with a total number of samples that’s an integer multiple of 2,048.

#### 6.3.4.4. Delete a Wavetable Bank



! The following process is difficult to undo and could cause one or more presets not to load properly or at all.

If you want to delete one of your wavetable banks, click the 'X' that appears when the cursor hovers over its name. A window will appear and ask you to confirm this process so you don't delete a bank accidentally.




#### 6.3.4.5. Delete a Wavetable



! The following process is difficult to undo and could cause one or more presets not to load properly or at all.


If you want to delete one of your wavetables, click the 'X' that appears when the cursor hovers over its name inside the wavetable bank. A window will appear and ask you to confirm this process so you don't delete a wavetable accidentally.



#### 6.3.4.6. Restoring a deleted item

If the wavetable or wavetable folder that you deleted still reside elsewhere on your computer, then the delete process can be reversed. This is because the import process makes a copy of these items and places them inside certain Pigments-specific folders on your computer.

For example, if you load a preset and it gives you a message like this:

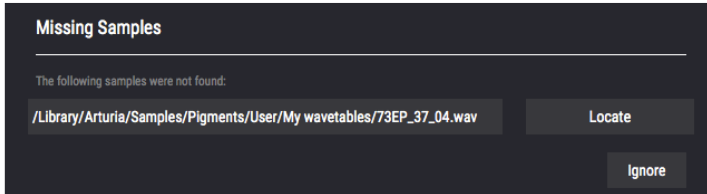

... then click the Locate button and navigate to the wavetable or folder you need to restore. After loading in the missing item, be sure to save the preset again. It should load properly after that.

You can also tell Pigments to skip that sample by clicking the Ignore button. The preset will load and then you can locate a substitute sample, if you like. Be sure to save the preset that way, though, or Pigments will show the Missing Sample error message again the next time the preset is selected.

#### 6.3.5. Wavetable Engine Tune

The controls in this section adjust the overall tuning for the Wavetable engine voices. See the Common Features section for details about [the tuning controls \[p.66\]](#).

### 6.3.6. Wavetable Unison Mode



Unison mode allows you to trigger as many as eight Wavetable voices with a single MIDI note. The available modes are identical to those in the Analog Engine's [unison mode \[p.72\]](#).


### 6.3.7. Frequency Modulation (Freq Mod, or FM)

The FM provided by the Wavetable engine type is similar to what is found in modular analog synthesizers. There are two types available: Linear and Exponential. Your ears will be the best judge of which type produces the desired results.


The source for this FM is the Wavetable Modulator in the lower right corner of the Wavetable engine window. Follow the link for a full explanation of the [Wavetable Modulator \[p.96\]](#).

#### 6.3.7.1. Modulation Type

To choose a modulation type, click the oval icon in the center of the pane to open a pop-up menu.

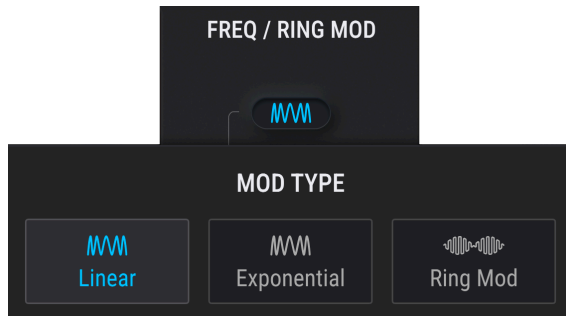


- **Linear:** The Linear FM type stays more in tune at shallow modulation depths.
- **Exponential:** The Exponential FM type goes out of tune as soon as the modulation depth is increased.
- **Ring Mod:** Applies ring modulation to the signal, which has the ability to remove the source signal and leave only the byproducts of modulation.

 Linear is easier to tame, Exponential is more wild, and Ring Mod is the most clangorous of all. The BBC famously used a ring modulator to create the voice of the menacing Daleks on the classic sci-fi series *Doctor Who*.

#### 6.3.7.2. Freq/Ring Mod Knob

This control adds additional modulation from the [Wavetable Modulator \[p.96\]](#), also known as the modulation oscillator.

### 6.3.8. Phase Modulation (PM)

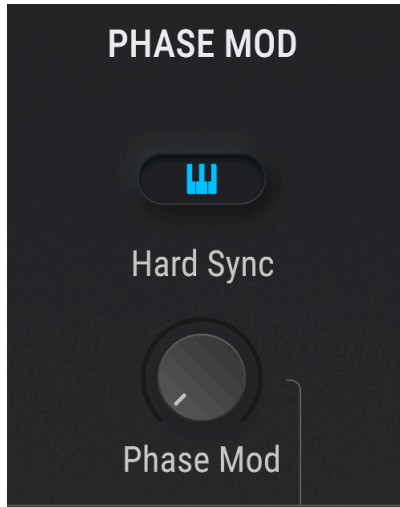

Phase Modulation (PM) is like a form of FM synthesis, only with some important distinctions:


- Only one algorithm is used (the classic two-operator stack)
- The carrier wave can be almost any shape, since you can [import your own wavetables \[p.83\]](#)
- The modulator has [multiple waveform options \[p.98\]](#)

Depending on the source and target waves, the results can be similar to the synthesis methods used in Arturia's [DX 7 V](#) or [Synclavier V](#) instruments.

#### 6.3.8.1. What PM does

The phase of the source wave is modulated to follow the amplitude of the target wave. The peak amplitude and frequency of the source wave are maintained, but as the amplitude of the target wave is changed, the phase and harmonic content of the source wave change as well.

### 6.3.8.2. Phase Sync Source

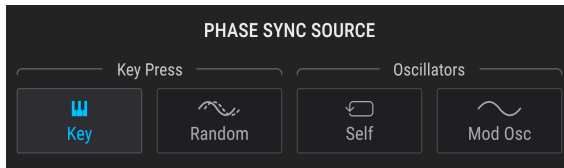

This parameter lets you choose which source will reset the wavetable phase. To select one of the options, click the name field to open a menu or click one of the arrows on either side of the name.

Option	Description
Key	Each incoming MIDI note resets the wavetable phase
Mod Osc	The wavetable phase resets each time the phase of the Wavetable Modulator resets to 0
Self	The wavetable phase resets at a rate defined by the main Coarse and Fine Tune parameters
Random	The wavetable is reset to a random phase on each incoming MIDI note

### 6.3.8.3. PM Mod Knob

This control regulates the amount of phase modulation being caused by the [Wavetable Modulator \[p.96\]](#).

### 6.3.9. Phase Transformation



Phase Transformation (more commonly called phase Distortion) is a method of changing the shape of waveform according to one of seven modulator waves, which are known as Types in Pigments. Don't think of the modulators as destinations the original waveform is forced to reach, but rather as an interesting "transformation" which is applied to the waveform itself. Think of a mirror in a carnival funhouse: when you look in it, you see your image reflected according to the curves built into the mirror. It's still *you*, but it has transformed.

#### 6.3.9.1. What PT does

Technically speaking, the source wave amplitude controls the phase position of the original wave. Put another way, as the Amount is increased the amplitude positions within the original wave are shifted in time. The warping can be subtle or drastic, but the pitch of the original waveform is not affected.



### 6.3.9.2. PT Source Options

Click the oval icon to select a Type of transformation.

The remap curves for each Target wave are based on the way they affected a sine wave, so the results will vary when the input (original) waveform is more complex. But what they tend to do is:

Source Name	Description
Pulse Width	Adds subtle to sharp harmonic edge on most waves
	Skew
Round	The source is influenced by a semi-square; it could gain valleys and/or plateaus
Tri/Pulse	Takes the middle of the waveform and stretches it to the left
Octave Plus	Part of source wave is miniaturized on the right; some harmonics are emphasized
Pseudo PW	Stretches the whole waveform to the left and leaves a gap on the right
Fractalize	Creates up to 8 copies of the whole waveform, from smaller to larger

### 6.3.9.3. PT Amount

The knob to the left of the selection icon controls the amount of transformation being applied. For a good illustration of what is happening, try the following examples:

1. Select the Default preset, which has the Wavetable engine and the Basic Waveforms wavetable active.
2. Disable the Morph feature in the Wavetable parameter set.
3. Select the Skew waveform as your Source.
4. Start with the Position control set to the first Wavetable position (the Sine wave).
5. Hold a note and slowly increase the PD Amount. Harmonics will be added gradually to the Sine wave as its amplitude peaks are "skewed" to the left and right.
6. Now, repeat the process by first returning the amount to 0 and selecting different waveforms on the wavetable using the Position control. Then, turn the amount up again and hear the effect of the same transformation applied to different waveforms.

### 6.3.9.4. Modulation Knob

The knob at the bottom of the Phase Transformation section provides additional modulation from the [Wavetable Modulator \[p.96\]](#).

### 6.3.10. Wavefolding



If you have played one of Arturia's Brute synthesizers then you are already familiar with wavefolding. Rather than folding the original wave back on top of itself, Pigments uses a selectable waveform and "folds" it downward onto the peaks of the current wavetable to create increasingly complex, unique waveforms.

#### 6.3.10.1. Fold Shape



As in other sections, click the blue oval icon and a drop-down menu will appear, offering three options for the "folder" wave.

### 6.3.10.2. Wavefolding Amount

The knob to the left of the oval controls the amount of wavefolding applied. Try the following:

- Select the Default preset, which has the Wavetable engine and the Basic Waveforms wavetable active.
- Disable the Morph feature in the Wavetable parameter set.
- Select the third Wavetable position using the Position control (the Sawtooth wave).
- Hold a note and slowly increase the Wavefolding Amount. The harmonics of the Sawtooth wave will sweep through the harmonic series.
- Try the experiment again with a different Wavefolding Shape. A similar sweep happens, but the sound is very different.
- Now select a more complex wavetable and repeat the experiment. The results will vary with different wavetables and Wavefolding Shapes.

### 6.3.10.3. Fold/Mod

This control provides additional modulation from the [Wavetable Modulator \[p.96\]](#).

### 6.3.11. Wavetable Section



This section determines the starting point and volume of the selected wavetable.

#### 6.3.11.1. Wavetable Position

Use this control to select the starting position within the wavetable. It may be helpful to switch between the [2D and 3D \[p.81\]](#) views of the waveforms to gain an overview of the options. When the 3D view is selected the blue lines represent the original wavetable positions. The green line shows the current position, including the intermediate ("morphed") positions.

#### 6.3.11.2. Wavetable Volume

The lower volume knob determines the output level of the wavetable itself, upstream of processing covered in this section.

#### 6.3.11.3. Output

The upper volume knob sets the output level of the entire Wavetable engine into the filters, accounting for all wavefolding, transformation, etc.

#### 6.3.11.4. Filter Mix

This controls the balance of the Engine output sent to Filter 1 versus Filter 2.

### 6.3.12. Modulation oscillator

This section provides the source for the additional modulations added by the bottom knobs in each of the previous sections. Its direct output is available, so it also can be used as a second oscillator or a noise source.




#### 6.3.12.1. Other Engine As Alternate Modulation Source

Click the "MODULATOR" banner at the top of this section to select the other Main engine as a source of cross-modulation for the Wavetable Engine you're currently working with, like so:



This provides even deeper modulation possibilities because the behavior of the entire source Engine is relevant. We cover this in detail in the section on [Engine Cross Modulation \[p.127\]](#) below.

### 6.3.12.2. Modulator Tuning



Use the Modulator coarse tuning control to set the chromatic pitch center of the modulation. Use the tuning drop-down menu (selected by the blue icon next to the Tuning knob to select one of four tuning modes, which are described in the chart below.

Tuning method	Description
Relative	Sets a chromatic offset to the tuning of the Wavetable oscillator (range: +/- 3 octaves)
Absolute	Sets the tune mode to chromatic key tracking
Ratio	Sets the tune mode to key tracking in harmonic ratios
Hertz (Hz)	Sets the tune mode to fixed frequency in Hertz

### 6.3.12.3. Modulator Fine Tune

To nudge the pitch of the Modulator up or down a bit, use the Fine tuning knob. Its range is +/- 1 semitone.




Hold the Control key or right-click while turning the knob for even finer adjustment.

### 6.3.12.4. Modulator Volume

Increasing this parameter allows the direct output of the Modulator to be blended with that of the Wavetable oscillator.

### 6.3.12.5. Modulator Wave

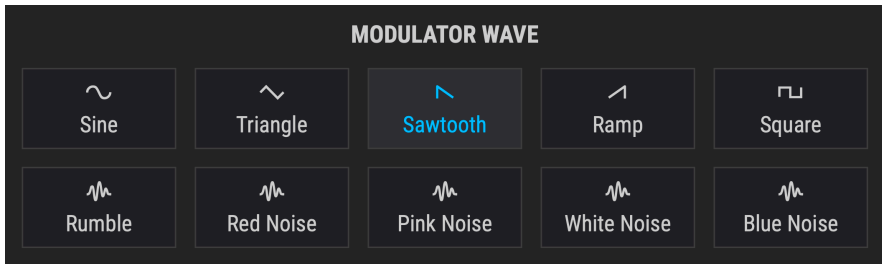

Ten waveforms are available as sources for the Modulator: 5 simple waveforms and 5 noise sources of various "colors".

Waveform	Description
Sine	Classic, pure sinusoidal modulation source
Triangle	Similar to Sine, except it rises/falls in a linear fashion and spends less time at the extremes
Sawtooth	Starts positive and falls
Ramp	Inverse sawtooth: starts negative and rises
Square	Spends half its time at maximum positive and half at maximum negative
Blue Noise	High-pass filter applied to random noise
White Noise	Unfiltered noise containing all frequencies
Pink Noise	Low-pass filter applied to random noise
Red Noise	Low-pass filter applied more heavily to random noise
Rumble	Only the lowest noise frequencies are allowed to pass

### 6.3.12.6. Engine as Alternate Modulation Source

As with the Analog Engine, you can click the "MODULATOR" label or the arrows to either side to use the other main engine (but not the Utility Engine) as a source for the currently selected Engine.



This is covered in depth in the section on [Engine Cross Modulation \[p.127\]](#) below.



## 6.4. The Sample Engine



*The Pigments Sample Engine*

Arturia has a very long history of building high quality sample-based instruments. All that know-how is distilled down into the Sample engine within Pigments. It has everything you need to manipulate samples in fun and musically interesting ways. The team did not want to simply stop at traditional sample playback, however. Pigments' Sample engine includes granular synthesis features that allow you to create complex textures using straightforward controls. Let's dive in!

### 6.4.1. Six Samples per Engine

Each Sample engine has six slots available for samples (A-F). These are visible in the preview windows under the waveform display. To add a sample to an empty slot or load a new sample into an occupied slot, click its preview window at the bottom of the [Sample Viewer \[p.103\]](#). Then select a sample using the methods described in the next two sections.

### 6.4.2. Sample Selection


There are three ways to load samples:

1. Use the previous/next arrows on the right side of the Sample name for adjacent choices. This will cross into an adjacent sample bank when the first or last wavetable of the current bank has been reached.
2. Click the sample name and make a selection from one of the Factory samples banks using the Sample Browser. The current selection will be highlighted.
3. Use the Sample Browser to import from a different source.

All three methods are available regardless of whether the Main, Edit, or Map mode button is selected.

### 6.4.3. Sample Browser

Click on the sample name in the Sample Viewer to open the Sample Browser.

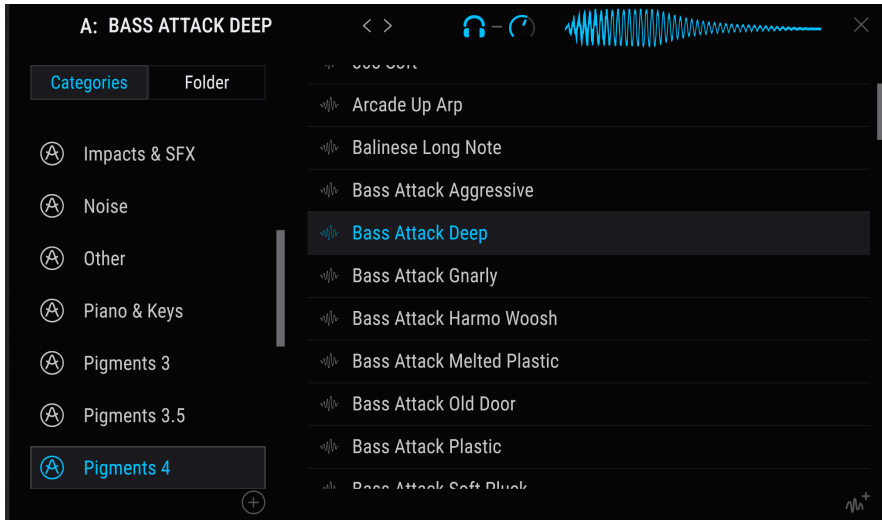

#### 6.4.3.1. Sample Audition

You can pre-audition (cue) a sample right inside the browser before deciding to load it into the engine.

- Click the headphone icon at the top of the right column to enable auditioning.
- The knob to the headphone icon's right controls the cue volume.
- Select any sample from the list to hear a preview.
- The preview will play until you select a different sample or click the headphone icon again to disable auditioning.

### 6.4.3.2. Selecting Samples

The left column shows the Sample banks. Factory banks are displayed with Arturia's logo in their tabs. These cannot be removed or deleted.

Scroll up and down to view the samples inside the current bank. There are a number of ways to select and audition samples.

- A single click selects a sample without closing the browser window, which allows you to audition samples one after the other.
- Scrolling with your cursor up/down arrows will audition the next or previous sample in the list.
- Scrolling with the arrows in the browser window will step through the list *without* audition playback.
- The cursor right arrow will re-audition the selected sample with no tempo
- If you find the one you want to keep, double-click its name and the sample will load into the Engine. The browser window will close.
- Press the Enter key on your computer keyboard to load the sample without closing the browser window.
- Your Escape key also closes the browser window.

You can also select a different bank on the left side and then choose a sample from that bank the same way.

### 6.4.3.3. Importing Samples

You can also import custom samples (WAV or AIFF files) into Pigments by clicking the waveform icon at the lower right. Once imported, they will show up in a bank called *Imported* in the browser's left column.

Imported files may be in WAV or AIFF format, 16 or 24 bits, and at sample rates from 44.1kHz to 192kHz. The maximum sample duration is limited only by the amount of RAM in your computer.


### 6.4.3.4. Importing Folders

To import an entire folder of samples at once, click the + icon at the lower right side of the left column of the browser. You can delete non-factory folders by clicking the trashcan icon that appears when you mouse over one.

To close the browser window, click the X.

## 6.4.4. Sample Viewer

The Sample Viewer displays the waveform of the currently loaded sample. Use the **Main**, **Edit**, and **Map** mode buttons to access the settings for the active sample.

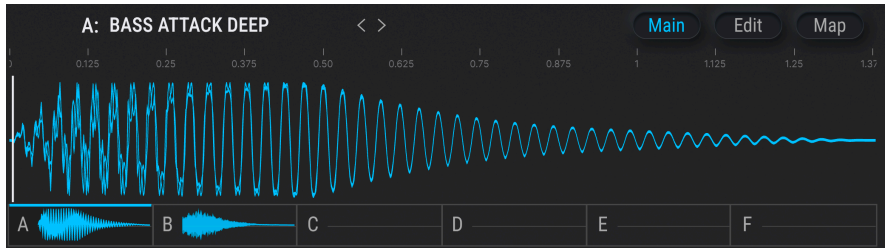

Here's a quick description of each mode:

- **Main:** The default setting for the Sample Viewer. When it is selected the Granular controls are visible under the Sample Viewer. Only the area of the waveform between the Trim Start / Stop markers is shown.
- **Edit:** Tuning, playback direction, loop functions, mix settings, and utilities specific to the Sample engine are available under the Sample Viewer when [Edit Mode \[p.104\]](#) is selected. This is where the Trim Start / Stop markers are set.
- **Map:** Keyboard / velocity range, sample selection methods, and playback behavior can be selected in [Map mode \[p.108\]](#). The features shown under the Sample Viewer are different depending on the selected Sample Map mode. Only the area of the waveform between the Trim Start / Stop markers is shown.

## 6.4.5. Editing Your Samples

To edit your loaded sample, click the Edit button at the top right of the screen to switches the Sample Viewer to Edit mode:



Here you can make changes that affect the samples independently, such as Tuning, Playback and Mix. You can also define which part of a sample plays back by moving the Trim Start / Stop markers at the top of the Sample Viewer.

 Only the sample data between the Trim Start / Stop markers is shown in Main and Map modes and in the preview windows. The entire sample is always visible in Edit mode.

Select the sample you want to edit by clicking its preview window, and then adjust the following parameters as needed:

- **TUNE Section**
  - **Transp:** Transposes the selected sample by +/- 36 semitones.
  - **Fine:** Fine-tunes the selected sample by +/- 1 semitone in 1-cent increments.
  - **Root Note:** Sets the root note of the selected sample.

- **PLAYBACK** Section
  - **Play Mode:** Selects the playback mode for the samples: Normal (forward) or Reverse (backward).
  - **Loop:** Toggles looping on and off. When active, Loop Start / End markers appear at the bottom of the Sample Viewer to help you set your points. These are different from the Trim Start / Stop markers shown above; see the next section for descriptions.
  - **Release:** When this button is active, the sample keeps looping during the envelope release phase. When inactive, the sample exits its loop as the release phase begins.
  - **Loop Mode:** This field is dark until Loop is enabled. The drop-down menu offers two options: "Forward" or "F&B" (forward & backward, also known as "ping pong" looping).
  - **Loop Fade:** This control is dark until Loop is enabled. It creates a crossfade using content before the loop start. The loop size is unaffected. The length of the Fade is reduced if it exceeds the loop size or is longer than the section between Trim Start and Loop Start. Note that Loop Fade is only possible when Loop Mode = Forward.
- **MIX** Section
  - **Gain:** Adjusts the gain level of the currently selected sample slot. This can help balance the levels between the active samples.
  - **Pan:** Sets the pan position of the sample slot in the stereo field.
- **SLOT** Section
  - **Copy:** The double-document icon lets you copy the current sample to another sample slot. Use this to set up different settings for the same sample.
  - **Reset:** The circles-and-arrows icon resets the sample to its default state. This is useful if tweaking parameters has produced an undesirable sound and you want to start over.
  - **Clear:** The trash can icon removes the sample from the selected slot and resets all related parameters. You'll be asked to confirm the choice before it happens.

#### 6.4.5.1. The Snap Button

Just above the sample edit display is the Snap button. When active (outlined in blue), this causes all trim and loop [markers \[p.107\]](#) to snap to their nearest zero crossing points, i.e. the closest place that the waveform is at an amplitude of zero. This helps to avoid pops, clicks, and other unwanted sonic artifacts. It also makes single-cycle sounds more accurate. With stereo samples, a tolerance is applied because true zero crossing points can be rare or nonexistent.

#### 6.4.5.2. How Loading Samples Affects these Parameters

When you load a new sample into an existing slot, or use the Reset function described above, Pigments applies certain rules to keep things organized and make your editing workflow easier.

- MIX parameters (Gain and Pan) are never reset.
- Transpose, Fine, Play Mode, and Release are never reset.
- Root Note does not change unless:
  - The sample's WAV file contains root note information.
  - [Map Mode \[p.108\]](#) is set to *KeyMap* or *KeyVeloMap*.
- Trim points, loop points, whether Loop is on, Loop Mode, and Loop fade are set according to metadata in the sample's WAV file. If the file has no metadata, these parameters are not reset.

### 6.4.5.3. Markers and Loops

You can also graphically edit many things about how your samples are played back, right on the Sample Viewer itself.




#	Name	Description
1	Trim Start marker	Playback start boundary. Click-drag this marker at the top of the Sample Viewer to adjust. Also sets the visible range for the Main and Map mode views. Might not be reached depending on Loop and Sample/Grain Start settings.
2	Loop Start marker	Sets the beginning point for the loop when Loop mode is active. Click-drag this marker at the bottom of the Sample Viewer to adjust.
3	Sample/Grain Start point	Determines the point at which the sample begins playback when triggered, relative to the positions of the Trim Start / Stop markers. It can be located inside or outside the loop, and may occupy the same position as one of the Trim markers.
4	Sample/Grain Start control	Adjusts the position of the Sample/Grain Start marker. It is not a fixed position; it is relative to the distance between the Trim Start and Trim Stop markers.
5	Loop End marker	Sets the end point for the loop when Loop mode is active. Click-drag this marker at the bottom of the Sample Viewer to adjust.
6	Trim Stop marker	Playback stop boundary. Click-drag this marker at the top of the Sample Viewer to adjust. Also sets the visible range for the Main and Map mode views. Might not be reached depending on Loop and Sample/Grain Start settings.
7	Snap	This function snaps edits to the closest zero crossing point. This helps to avoid clicks and pops, for a cleaner sound more quickly.

Note that if **Loop Fade** is active, grey triangular ares will slope downward from your loop points to your trim points.



### 6.4.6. Map Mode

Map mode determine how the loaded samples will be triggered. Begin by selecting a sample slot with buttons A-F on the right, then chose an option on the left.

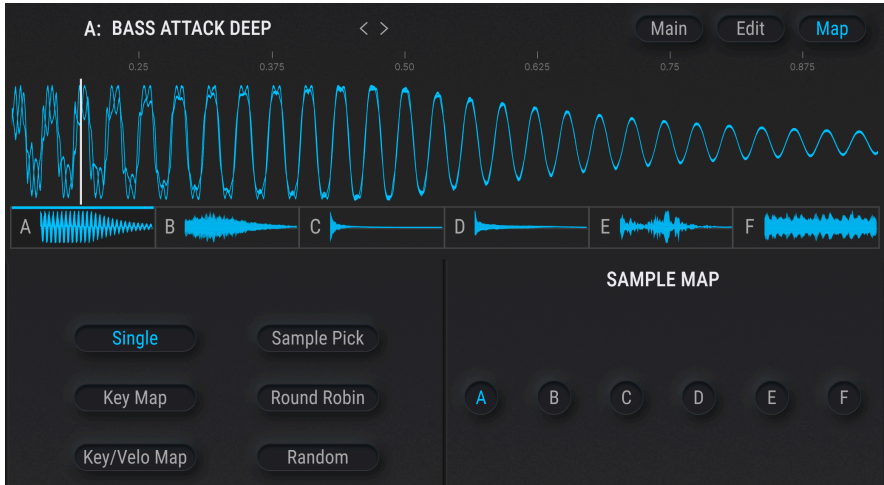

Only the sections of the waveform between the Trim Start / Stop markers are shown in Map mode.

Here are brief descriptions of the six options; for a few visual examples, see the section below this chart.

Mode	Description
Single	The currently selected sample is played across the entire keyboard and velocity range.
Key Map	The 6 sample slots are mapped across the keyboard. If a sample slot is empty then the sample before it is stretched across an extra octave. If the first two sample slots are empty, for example, then the first filled slot (C) is stretched across the lower octaves. Click the arrows on the right side of the Map mode window to transpose the Map range up or down by octaves.
Key/Velo Map	The filled sample slots are mapped across 3 octaves and 2 layers of velocity. The Velocity value sets the cross-switch point. See below the chart for three examples. The right side of the Map mode window displays the Range and Velocity split points above the range selector. Use the arrows to transpose the Map range up or down by octaves.
Sample Pick	The filled sample slots are evenly mapped across the range of the Sample Pick knob on the right side of the Map mode window. A sample is selected when a voice is triggered, and the engine does not switch voices if the knob position changes while that sample is playing. A different sample can be triggered by the next MIDI note. Hover over the Sample Pick knob to reveal the Mod Assignment symbol (the '+' sign).
Round Robin	The filled sample slots are played in circular order. When the Granular section is switched on, each grain plays a new sample based on the "round robin" order. The right side of the Map mode window shows an example graphic, as no additional controls are needed.
Random	Samples are picked randomly on each key press among the filled slots. When the Granular section is switched on, each grain plays a new randomly selected sample. The right side of the Map mode window shows an example graphic, as no additional controls are needed.

#### 6.4.6.1. Which Sample Is Playing?

The Preview windows indicate which sample is being triggered within a map, either according to its position in the zone/velocity range or when it is selected by other criteria.

#### 6.4.7. Sample Engine Tune

The controls in this section adjust the overall tuning for the Sample engine voices. See the part of the [Common Features section \[p.66\]](#) for more

#### 6.4.8. Sample/Grain Section



- **Start** - Sets the start point of the sample (or grain) to be played, relative to the distance between the Trim Start and Trim End markers. Your selection here is also used as the reference for triggering grains when the Granular section is switched on.
- **Volume** - Sets the volume of the sample (or grain) to be played.

## 6.4.9. Granular Section




This section lets you control the Granular synthesizer features of the Sample engine. When this section is switched off, the Sample engine acts as a traditional sample playback engine.

When it's on, Pigments chops the sample up into a number of tiny bits with adjustable sizes and envelope shapes. These "grains" can then be played back and altered in a number of creative ways.

**The top row** of controls adjusts the main characteristics of the grains.

### 6.4.9.1. Density


This sets the rate at which new grains are generated.

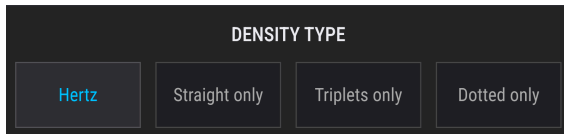

Use the pop-up menu to select the rhythmic type for this playback: Hertz or three tempo-synced options.

### 6.4.9.2. Grain Shape


This sets the envelope shape of the grain, which can have a big impact on its sound.

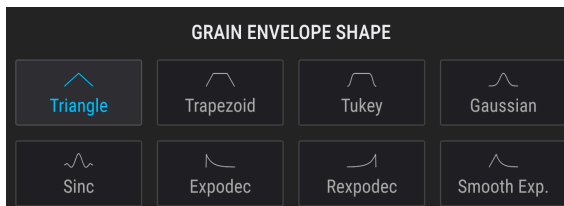

The pop-up menu selects the overall grain shape while the knob shapes it further. This is graphically reflected in the blue oval.

### 6.4.9.3. Grain Size

This sets the duration of the grain.



Depending on the mode selected in the pop-up menu, the knob adjusts the size as a function of:

- **Time:** Absolute, in milliseconds
- **Sync:** Tempo, covering all rhythmic values including straight, dotted, and triplet
- **Triplets:** Tempo, triplet values only
- **Dotted:** Tempo, dotted values only
- **Ratio:** A time division of the current Density.

### 6.4.9.4. Randomizers


The lower row of knobs, most with pop-up menus accessed by clicking their adjacent buttons, randomize a variety of grain playback behaviors. The chart below details their functions:

Control	Description	Pop-Up Options
Start	Adds a random time offset from the sample start position	Before, After, Both
Pitch	Randomizes the pitch of grains	Up, Down, Both
Density	Randomizes the Density setting	More Dense, Less Dense
Direction	Adjusts the ratio of backwards to forwards playback of grains in the grain cloud	N/A
Size	Randomizes the grains' Size setting	Shorter, Longer, Both
Stereo Pan/Width	Randomizes either the stereo pan position of each grain (Pan) or their overall stereo spread (Width)	Pan, Width
Volume	Adds randomness to the volume of the grains as they play	N/A

### 6.4.10. Shaper Mode

Directly below the Tune controls is the Shaper Mode section – where the [Unison \[p.70\]](#) controls for the Analog and Wavetable engines reside.

Clicking the name at the top will bring up this menu of Shaper types:

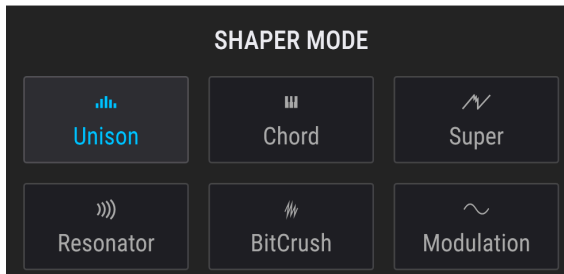

the **Unison**, **Chord**, and **Super** modes work identically to those in the [Analog \[p.72\]](#) and Wavetable engines, so we won't rehash those here. However, the Sample Engine gets three new tools of its own in this department.

#### 6.4.10.1. Resonator



This resonator effect consists of six bandpass filters in parallel that can be tuned to specific frequencies, thereby resulting in some very interesting textures. The first filter is tuned according to the Tune section as well as the note played on the keyboard. In granular mode, the pitch of the resonator follows the pitch of the grains, even with random pitch involved. The remainder of the filters are tuned in a harmonic relationship with the first filter.

- **Coarse:** Sets the fundamental tuning of the resonator.
- **Wet/Dry:** Sets mix between dry sound and sound processed by the resonator.
- **Resonance:** Sets the resonance / decay of the resonator.
- **Inharm:** When set to 0 (middle position), the resonator filters the harmonics of the pitch of the sample/grain. When set to a value higher than 0, the resonant tones are more sparse, while in the contrary values under 0 will bring it close together. When the resonant tones of the high order filters are no longer a multiple of the pitch of the grain/sample, this can lead to bell-type sounds or metallic kind of inharmonicity.

#### 6.4.10.2. BitCrush



This option reduces sampling rate and/or bit depth to produce a popular “lo-fi sampler” sound. Or, it can go far beyond that and make the sample nearly unrecognizable

- **Decimate** Reduces the sampling rate of the effected sound.
- **Bit Depth** Reduces the bit depth of the sound.
- **Key Track** When switched on, the Decimate value follows the keyboard pitch being played.

### 6.4.10.3. Modulation



This option provides Linear FM (through-zero) and Ring modulation.

- **Freq Mod** - Sets the amount of through-zero frequency modulation.
- **Ring Mod** - Sets the amount of ring modulation.

**i** Note that the [Modulator \[p.115\]](#) section is used as a source of modulation for this effect. Therefore changing the pitch or the waveform of the Modulator will change the frequency and ring modulation effects.

### 6.4.11. Output Section

- **Filter Mix:** Determines whether the output of this engine will be sent to Filter 1 (fully counterclockwise), Filter 2 (fully clockwise) or a mix of both (the center positions).
- **Volume:** Sets the output of the Sample engine into the filters.

### 6.4.12. Modulator Oscillator

This section provides a modulator oscillator that can be used along with the Sample engine, as well as the option to use the other main Engine as the modulation source.



Its behavior and parameters are identical to [Wavetable Engine's Modulator \[p.96\]](#), so refer to that section for details.

#### 6.4.12.1. Engine For Alternate Modulation Source

Click the "MODULATOR" banner or the arrows at the top of to select the other Main engine as a source of cross-modulation for the Sample Engine you're currently working with, like so:




This provides even deeper modulation possibilities because the behavior of the entire source Engine is relevant. We cover this in detail in the section on [Engine Cross Modulation \[p.127\]](#) below.



## 6.5. The Harmonic Engine

Much of traditional synthesis is *subtractive*. That is, you start with a complex waveform full of harmonics and then filter out what you don't want. *Additive* synthesis is the opposite: You add up individual sine waves (a pure sine wave has no harmonics) until you have a precise harmonic profile.

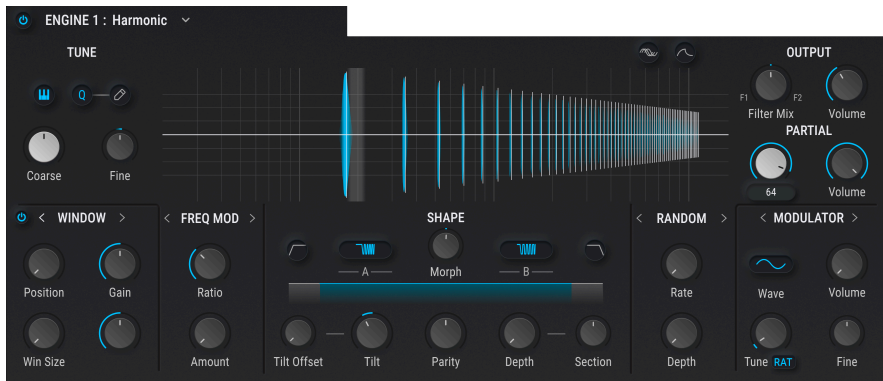

*The Pigments Harmonic Engine*


Additive synthesis deals with the building blocks of what our ears hear on a fundamental level. It also used to be the exclusive realm of high-priced hardware synths like the Synclavier or one-of-a-kind experimental instruments such as the Bell Labs Alles. The Harmonic Engine in Pigments brings the power of additive synthesis to your computer. The resulting spectrum is displayed in the viewer in the top center of the engine, with controls below it and to either side.

### 6.5.1. Tune and Output Sections

These work much like their companion sections in the other engines. See [Common Engine Features \[p.63\]](#) earlier in this chapter for details.

## 6.5.2. Partials Section

Any sound can be broken down into sine waves consisting of a fundamental pitch, then a bunch of harmonics or *partials* above it. Pigments lets you create tones with up to 512 partials.

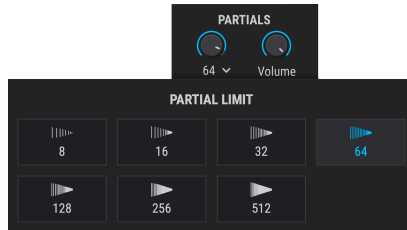

*The drop-down Partials Limit menu deployed*

### 6.5.2.1. Partials Knob

Turning this knob clockwise will increase the number of partials in the sound, in progressively decreasing volume by default.


### 6.5.2.2. Partials Volume

This increases the overall volume of the partials but not that of the [Modulator \[p.126\]](#) even if its own volume is turned up. Fractional values decrease the volume of the highest-pitched partial in the series.

### 6.5.2.3. Partials Limit

This drop-down sets an upper limit on the number of partials brought in by the partials knob, saving computer CPU resources. Experimenting with just a few partials (8 or 16) can also be great for learning additive synthesis.

### 6.5.3. Partials Viewer

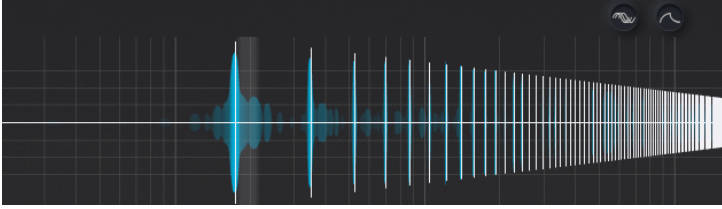

*The partials viewer*

The central viewer shows the overall distribution of partials in real time as you play. The horizontal axis is pitch; the vertical axis is volume.

In addition, the vertical axis shows the stereo panning of partials as determined by the [Imaging Section \[p.122\]](#): above the center line is to the left; below the center line is to the right.

#### 6.5.3.1. Random Phase Button

On the top right of the Partials viewer is the Random phase button. As its name implies, this randomizes the phase of the partials, which can enrich or thicken the sound depending on the Partials mix.

#### 6.5.3.2. Smooth Button

To the right of the Phase Randomize button is the Smooth button. When this is active, partials that are changing in amplitude (due to modulation) do so more gradually.

## 6.5.4. Ratio Section

Partials are multiples of the frequency of the fundamental pitch. This section does the initial math, as it were. It is identified by either the words FREQ MOD or PHASE MOD at the top.



*The ratio section features Frequency Modulation and Phase Modulation*

### 6.5.4.1. Ratio

The knob sets the interval between the partials' frequencies. The range of values is -1.00 to 5.00.

### 6.5.4.2. Modulation

The ratio itself can be modulated by the Harmonic Engine's [Modulator \[p.126\]](#). The bottom knob sets the modulation depth. Clicking on the banner will let you decide whether this is applied as Frequency or Phase modulation.



♪ Higher ratio settings sometimes produce a more "glassy" sound, but the best approach is to experiment with these knobs and listen.


### 6.5.5. Spectrum Section

*Spectrums* are frequency profiles that can be superimposed on the “raw” partial series, further sculpting its sound. Pigments lets you apply two Spectrums to the partials (with 12 choices for each) and even morph between them.



What’s a frequency profile? Functionally, it’s like multi-point EQ curve that notches out multiple frequencies according to its shape.

#### 6.5.5.1. Spectrum Drop-Down Menus

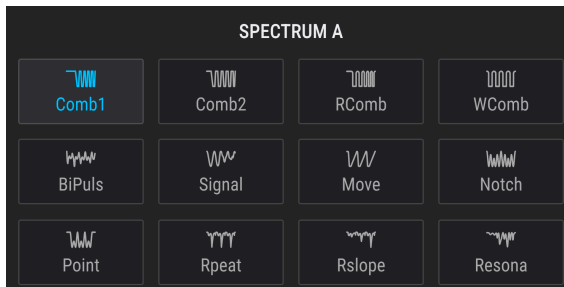

Each of these lets you select one of 12 Spectrum shapes for slots 1 and 2.

#### 6.5.5.2. Section Knob

This shifts the position of the Spectrum over the partial series, which changes the partials that it affects.


#### 6.5.5.3. Morph

This knob morphs continuously between Spectrum slots 1 and 2, with the resulting Spectrum (the one being applied to your sound), shown in the graphic immediately above. The “valleys” in the graphic represent frequency cuts.

#### 6.5.5.4. Depth


This knob controls how much the spectrum affects the frequencies of the partial series relative to its Section and Morph settings.

### 6.5.5.5. Highpass and Lowpass Filters



Notice the highpass and lowpass icons at left and right of the spectrum drop-downs, respectively. The left icon applies a highpass filter. Frequencies below those affected by the Spectrum will decrease in volume.

The right icon applies a lowpass filter. Frequencies above those affected by the Spectrum will decrease in volume. Both may be used at once, and are helpful for focusing on only the frequencies within the Spectrum's range.

 Spectrums are great for vowel-like sounds. Turning or modulating the Morph knob can produce changing vowels, like "ee-ah-ow."

### 6.5.5.6. Tilt

Adjusts the steepness of the slope.

### 6.5.5.7. Tilt Offset


Changes the partial where the slope begins.

### 6.5.5.8. Parity

This changes the proportion of odd-numbered and even-numbered multiples in the partial series. (Remember that we said partials are multiples of the fundamental.) You can have all odds, all evens, or any mix in between.


### 6.5.6. Imaging Section

Pigments' Harmonic Engine takes things to the next level by letting you pan different partials across the stereo field. This can result in wide, immersive, fascinating sounds. The imaging section is a pane of controls identified by a title banner that says either SPLIT, PERIODIC, or RANDOM (referring to its selectable modulation modes).

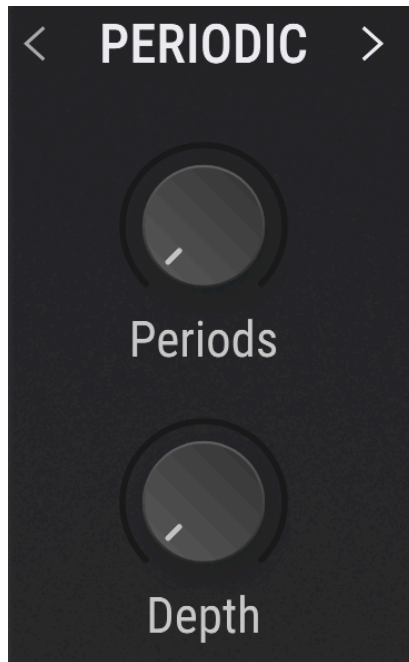

#### 6.5.6.1. Imaging Modulation Mode

A pop-up menu offers three main options for doing this and changes the knobs you see in this section accordingly. Click the banner to access it.

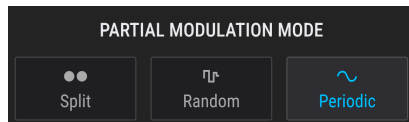


- **Split:** Manual panning of odd and even partials.
  - **Odd:** Pans the odd partials left and right.
  - **Even:** Pans the even partials left and right.
- **Random:** Randomly pans individual partials.
  - **Rate:** Sets the speed at which partials are randomly panned.
  - **Depth:** Sets the intensity of random panning applied.
- **Periodic:** Pans clusters of partials across the left and right channels.
  - **Periods:** Sets the size of the clusters.
  - **Depth:** Sets the amount of offset from the center stereo position for the clusters.

## 6.5.7. Partial Shaper Section

At the lower left of the Harmonic Engine area of Pigments is an area titled WINDOW by default, but this is one of three modes for further modulating and altering the balance of partials in your sound. The other two are CLUSTER and SHEPARD, and each changes the knobs you see in the section somewhat. This is basically the Unison/Shaper section for the Harmonic Engine, but what it does is very different than the corresponding sections in the other three Engines.

### 6.5.7.1. Window Mode

As the name implies, this lets you set a given window within the partial series, then adjust its volume and/or apply FM from the [Modulator](#) [p.126].

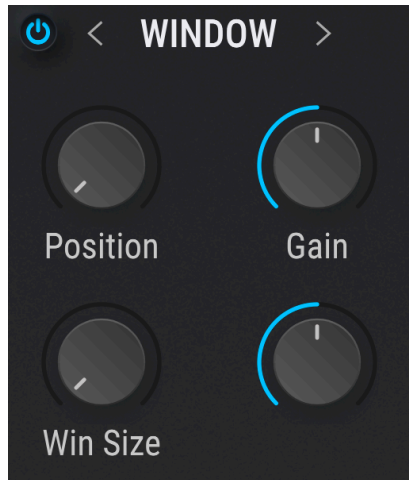

The parameters are:

- **Position:** Sets where the window begins in terms of the lowest-pitched partial.
- **Win Size:** Sets the width of the window, i.e. how high it extends.
- **FM:** Applies FM from the Modulator to the partials within the window only.
- **Gain:** Changes the volume of the partials within the window only.



### 6.5.7.2. Cluster Mode

This brings partials within an adjustable window closer together, changing their frequency and resulting harmonic differences from subtle to drastic.



The parameters are:

- **Position:** Selects the lowest partial of the starting cluster.
- **Clusters:** Sets the width of the window, which determines how many clusters there will be.
- **Partials:** Sets the number of partials per cluster.
- **Density:** Determines how much the partials' frequency will shift towards the starting point of their cluster.



♪ For the most traditionally musical results, try Density values at or near 25%, 50%, and 100%.

### 6.5.7.3. Shepard Mode

“Shepard’s tone” refers to an audio illusion in which a complex sound seems to be eternally rising or falling in pitch even though its base frequency is unchanged – sort of like if M.C. Escher were a synthesist. This mode in Pigments can create that illusion and affect the timbre in other creative ways. It does this by shifting the frequency of each partial towards the next higher partial



Again, it can do this within a certain window. The parameters are:

- **Position:** Sets the base partial of the window.
- **Win Size:** Sets the width of the window as in the other two modes.
- **Phi:** Determines the amount of frequency shift towards the next partial up, within the window.
- **Gain:** Adjusts the volume of the partials within the window.

**i** 🎵 To create the Shepard’s tone illusion, modulate the Phi parameter with a slow LFO set to a ramp waveform. Set the Phi knob to 0.500 and modulation depth to 0.50 for the best results.

### 6.5.8. Modulator Section

The MODULATOR, or modulation oscillator, in the Harmonic Engine is a source of FM and Phase Modulation for the [Partial Shaper \[p.123\]](#) (when in Window mode) as well as the Gain in the [Ratio section \[p.119\]](#).

It works much like its counterparts in the [Sample \[p.115\]](#) and [Wavetable \[p.96\]](#) Engines, and includes the same ten waveform options in the drop-down menu.

To recap, its tuning options include absolute, sync, sync dotted, sync triplets, and ratio options,



! A note on volume: If this knob is turned up in the Harmonic Engine's Modulator, the output of the modulation oscillator will be audible next to the partials from the Harmonic Engine. This means you could use it as an extra layer or sub-oscillator if you like. The Volume knob does not affect the oscillator's role as a modulation source for the Window mode or Ratio.

## 6.6. Engine Cross Modulation

Engine 1 can be used as a modulation source for Engine 2, and vice-versa. Click on the MODULATOR banner in any Engine (or use the arrows on either side) to switch to the correct controls.



We already covered the receiving end of this modulation in each Engine's section because the controls are different depending on the Engine. However, we'll cover cross-modulation here because it works similarly for every Engine.

The MODULATOR header will change to ENGINE 2 if you're working in Engine 1, and vice-versa. In other words, the Engine whose tab is currently *not* selected is the source, and the selected Engine is the destination. The key things to know here are that the source Engine must be turned on in order to provide modulation, but the Volume knob in its Output section does not affect the modulation amount.



The controls are a bit different depending on the Engine used as the mod source.

#### 6.6.1. Analog Engine as Mod Source



- **Coarse:** Sets the overall coarse pitch of the other engine. (Mirrors the Coarse knob in the other Engine's Tuning section.)
- **Fine:** Sets the overall fine pitch of the other engine. (Mirrors the Fine knob in the other Engine's Tuning section.)
- **Noise:** Adds noise to the modulating signal. (Mirrors the Volume knob in the other Engine's Noise section.)
- **FM Amount:** Mirrors the [Modulation Amount \[p.78\]](#) knob shared by the other Engine's oscillators 1 and 2. If the destination Engine is also Analog, this can interact with its own Modulation Amount knob in interesting and extreme ways.

### 6.6.2. Wavetable Engine as Mod Source



- **Coarse:** Sets the overall coarse pitch of the other Engine. (Mirrors the Coarse knob in the other engine's Tuning section.)
- **Fine:** Sets the overall fine pitch of the other Engine. (Mirrors the Fine knob in the other engine's Tuning section.)
- **Position:** Sets the wavetable position in the other Engine. (Mirrors that Engine's Position knob.)
- **Ellipse Icon with Arrows:** Selects the wavetable from the other engine doing the modulating.

### 6.6.3. Sample Engine as Mod Source



- **Coarse:** Sets the overall coarse pitch of the other Engine. (Mirrors the Coarse knob in the other engine's Tuning section.)
  - **Fine:** Sets the overall fine pitch of the other Engine. (Mirrors the Fine knob in the other engine's Tuning section.)
  - **Start:** Sets the sample start position in the other Engine. (Mirrors that Engine's Start knob.)
  - **Ellipse Icon with Arrows:** Selects samples serially. (Mirrors the sample browser in the other Engine; works only for the selected sample slot.)

## 6.6.4. Harmonic Engine as Mod Source



- **Coarse:** Sets the overall coarse pitch of the other Engine. (Mirrors the Coarse knob in the other engine's Tuning section.)
  - **Fine:** Sets the overall fine pitch of the other Engine. (Mirrors the Fine knob in the other engine's Tuning section.)
  - **FM Amount:** Sets the overall modulation amount.
  - **Ratio:** Sets the ratio of additive partials. (Mirrors the Ratio Amount knob in the other Engine.)

### 6.6.4.1. Mixing the Source Engine In

It is possible to use the source Engine for modulation and hear its audio in the mix at the same time – simply turn up the Volume knob in its Output section. This can make for some interesting and sometimes dissonant sonic qualities.

### 6.6.4.2. Modulation Routings Follow the Knobs

As we have said, controls in the destination Engine's ENGINE 1/2 section are mirrors of certain controls in the source engine. Therefore, if any knob is being [modulated \[p.202\]](#) by a source in the center strip, that modulation will appear in both the source and destination Engines.

### 6.6.4.3. Two Cross-Mods at Once


We know what you're thinking: Can both Engines 1 and 2 cross-modulate one another at the same time? Yes, but be careful with this, because the results can get wild and messy very quickly!

At this time, the Utility Engine does not participate in cross-modulation.



## 6.7. The Utility Engine

The Utility Engine combines a single virtual analog oscillator (recommended for use as a sub-oscillator) with two sample-based “Noise” sources. We put that in quotes because they do a lot more than noise, as we’ll see momentarily.

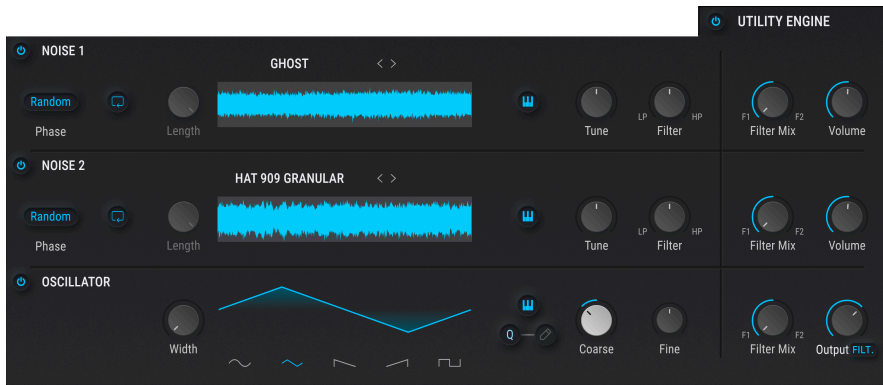

The beauty of the Utility Engine is that it’s always there in its own tab, regardless of what you have in the two main engine tabs. It can be used at the same time as either or both of them, or turned off via its on/off icon.


### 6.7.1. Noise Sources

These two identical sound sources go far beyond the capabilities of the Noise section in the Analog Engine. Each has an identical set of independent controls.

They use samples of various noises, ambiences, transients, nature and machine sounds, vinyl record crackles, and many more sonic tidbits. You can use either or both, with or without the oscillator.

#### 6.7.1.1. Noise Sample Browser

Click the name above the center area of either Noise 1 or Noise 2 to bring up a special browser dedicated to these samples.

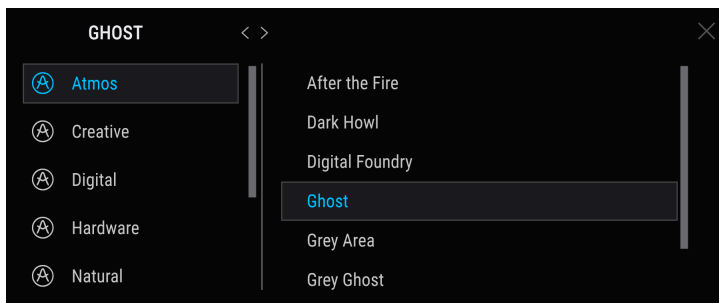

Select categories on the left side, then click a sample on the right to load it. Double-click the sample name or click the X to close the browser. You may then step through samples with the left and right arrows, or reopen the browser using the books-on-a-shelf icon.

### 6.7.1.2. Phase Re-Trigger

This toggle affects how the sample start point is triggered. There are two options.

- **Key:** The sample starts from the beginning every time a new key is played.
- **Random:** The sample start time is slightly randomized.



♪ The Random setting will avoid the flanging effect that can occur when a sample is played polyphonically with key tracking disabled.

### 6.7.1.3. Keyboard Tracking

With the keyboard-icon button enabled, the noise sample will pitch up and down when played from a keyboard. When it is disabled, the sample plays at its recorded pitch regardless of which key is struck.

### 6.7.1.4. Tune

This knob pitches the sample up or down, with a range of +/-36 semitones (three octaves in either direction).

### 6.7.1.5. Noise Filter

Each Noise source has a dedicated filter. Turning the knob counterclockwise from 12 o'clock reduces the cutoff frequency of a lowpass filter. Turning it clockwise from there increases the cutoff of a highpass filter. At 12 o'clock position, there is no filtering.

### 6.7.1.6. Loop Button

The Noise samples normally play in one-shot mode, but they will loop continuously if this button is engaged.

### 6.7.1.7. Length


This knob controls the duration of the sample in one-shot mode. At maximum, the sample will play all the way to its endpoint. At minimum, you might not hear anything! When the Loop Button is engaged, this knob is greyed-out.

### 6.7.1.8. Output Section: Filter Mix

As in other engines, this controls the Noise sources' routing balance between Filter 1 and Filter 2 (Pigments' main filters, not the dedicated ones described above).


### 6.7.1.9. Output Section: Noise Volume

Each Noise source also has an independent Volume knob.

 Note that there is no overall output control for the Utility Engine. You balance the volumes of the oscillator, Noise 1, and Noise 2 with their respective knobs. This actually provides a lot of creative control!

### 6.7.2. Oscillator

Beneath the tuning controls [common to all engines \[p.66\]](#) is a virtual analog oscillator. By default, coarse tuning comes up at -12 semitones (an octave down). However, it has a full pitch range of +/-36 semitones, so you can use it for anything.

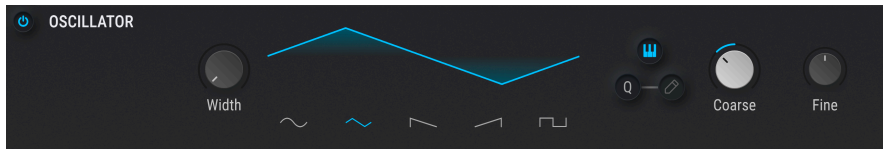

Note: The Keyboard icon in this section affects this oscillator only. The [noise sources \[p.132\]](#) each have their own tracking toggle.

#### 6.7.2.1. Wave

These option buttons provide:

- Sine
- Triangle
- Saw
- Ramp
- Square

#### 6.7.2.2. Width

This controls the pulse width of the triangle and square waveforms and can vary their timbre dramatically. If neither of those waveforms is selected, it is greyed-out.


#### 6.7.2.3. Coarse Tune

Tunes the oscillator in semitones

#### 6.7.2.4. Keyboard Tracking

When the keyboard-icon button is lit, oscillator pitch follows notes played on a keyboard.

#### 6.7.2.5. Mod Quantize

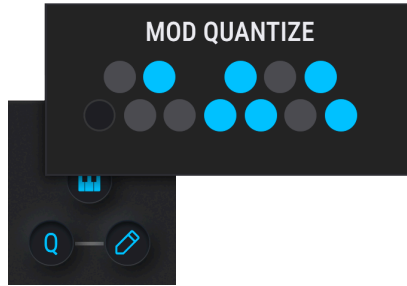


As in the other sound Engines, coarse tuning can be modulated by any source, and you can do so according to the specific notes you want to hear. The **Q** icon enables this feature. Click the pencil icon to reveal the pop-out “mini-keyboard.”

#### 6.7.2.6. Fine Tune

Fine-tunes the oscillator in non-integer fractions of semitones.

### 6.7.3. Output Section


The output section in the Utility engine features separate volume knobs for each noise source and the oscillator.

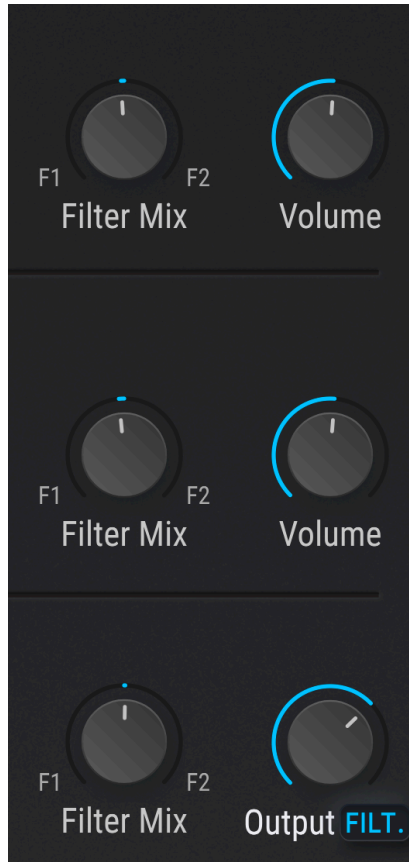

- **Filter Mix:** Balances each noise sources (or the oscillator's) output between Filters 1 and 2.
- **Volume:** Overall output volume of each noise source to the Filters.

#### 6.7.3.1. Oscillator Output Knob

The master output volume knob for the oscillator is special. It has a pop-up menu to determine its output routing. The choices are:



- **Filters:** Through either or both filters according to the position of the Filter Mix knob.
- **FX Bus A:** To FX bus A only, bypassing the filters.
- **FX Bus B:** To FX bus B only, bypassing the filters.
- **Direct Out:** Bypasses all filters and FX.

Hence, the Filter Mix knob is only relevant if "Filters" is selected from this menu.

## 7. THE FILTERS

A synthesizer can have all kinds of crazy features, but the two most critical components are the oscillators and the filters. You need a great starting point (the oscillators), and Pigments provides the beefiest and most versatile oscillators you are likely to encounter in the virtual world.


Of equal importance are the filters, which can make or break the sound. They need to be able to tame the oscillators or make them even more wild, depending on what will serve your music best.

With that in mind, Arturia provides a broad assortment of our favorite filter types in the Filter section of Pigments. They will help you sculpt the sound of each preset you create into something unique.

### 7.1. Common Filter Features

Pigments provides two independent, identical Filters that can be adjusted and configured in many ways. Since each filter contains the same parameters we will cover them all at once.

#### 7.1.1. Filter View Window

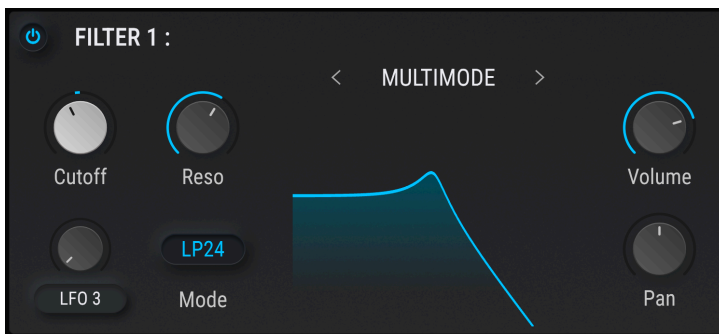

Each filter has a window that displays a graphical representation of its settings. When you make a change to the cutoff frequency, for example, you will see an equivalent change take place in the Filter View window.


You can also click inside this window and drag the cursor to make changes:

- Drag left and right to change the cutoff frequency, and
- Drag up and down to adjust the amount of resonance.

**i** Each parameter of each filter can be modulated by [multiple sources \[p.151\]](#) within Pigments and/or by external MIDI sources.

### 7.1.2. Filter Type Menu

Click in the Filter Type field for a drop-down menu that lists the available types. After a selection is made the menu will close. Alternately, you can use the arrows on either side of the type name to step through them serially

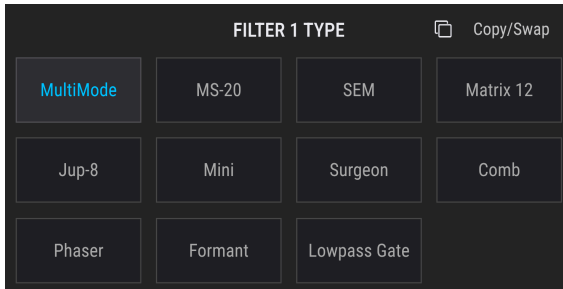


Most of the filter types have several modes of operation such as LP (lowpass), HP (highpass), BP (bandpass), and other options. We'll cover each of these below in [Filter Types and Modes \[p.141\]](#).

#### 7.1.2.1. Copying and Swapping Filters

Changing the order of the filters can make a huge difference in the sound when the filters are being run partially or entirely in series. In the Filter Type menu are options letting you copy that filter to the other or swap the position of the filters as you have them set up.


### 7.1.3. Filter Volume

Use this control to adjust the level of the selected filter relative to the other filter. When the filters are fully in series, the volume of Filter 1 will feed entirely into Filter 2, which means that if the volume of Filter 2 is very low then changes made to Filter 1 may not be heard. (It can also result in a delicious distortion being fed to Filter 2.)

 If Filters 1 and 2 are 100% in series and Filter 2 volume is at zero, no audio signal will be heard.

### 7.1.4. Filter Pan

Each filter can be panned to its own position in the stereo field with this control. The final result will depend on whether the filters are routed in series, parallel, or some combination of the two.

 If Filters 1 and 2 are placed in series and panned to the opposite extremes (Filter 1 hard left, Filter 2 hard right, or vice versa), no audio signal will be heard from Filter 1.




### 7.1.5. Filter Bypass

Each filter has an on/off button in the upper left corner which will put the filter into Bypass mode and allow the raw signal from the voice Engine to be heard. However, if the filters are 100% in series the raw audio from the first filter will still pass through the second filter.

### 7.1.6. Filter Edit Row

Immediately below the [Filter View window \[p.138\]](#) is the section where the various controls for each filter type will appear as they are selected. We'll describe the controls for each filter type below.

### 7.1.7. Series, Parallel, or Both

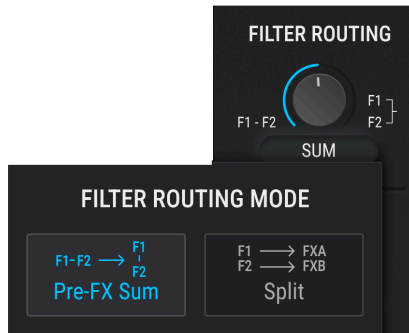

*The Filter routing balance knob with the filters-to-FX pop-up deployed*

*The Filter Routing controls are located in the [Filter Routing/Amp Mod section \[p.152\]](#).*

Filters 1 and 2 can be placed in series which means the output of Filter 1 is fed directly into the input of Filter 2. This allows for incredibly precise filtering of a single signal, which is then fed to the outputs. The filters can also run in parallel, which allows the individual character of each filter to be applied separately and appear independently at the outputs.

It's also possible to create a blend of both the series and parallel filter routings, and to choose whether a sum of both filters feeds the FX section or if Filter 1 goes to FX Bus A and Filter 2 goes to FX Bus B. See [Filter Routing \[p.152\]](#) in the next chapter for a full description of these controls.

## 7.2. Filter Types and Modes


Below, we will go over all the filter types. The charts detail the settings they do not necessarily have in common.



You can use the Control + drag method to fine-tune the setting of most parameters.

### 7.2.1. MultiMode

This analog filter model is unique to Pigments. It offers 12 different Modes, including low pass, high pass, band pass, and notch filters. Each filter is available in 6, 12, 24, and 36 dB/octave slopes. It is also less CPU-intensive than most of the other modes.

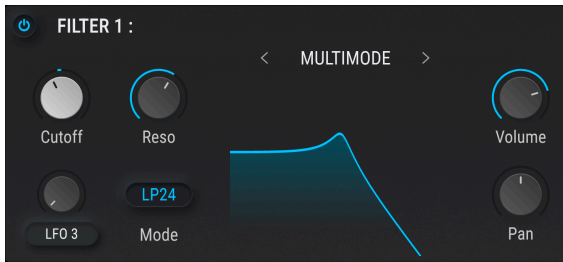

*Pigments's MultiMode filter*

Parameter	Description
Cutoff	Sets the frequency at which the audio signal will begin to be emphasized or reduced
Resonance	Emphasizes a peak near the cutoff frequency
FM Source	Click the name for a menu and make a selection. Knob becomes grey with "None" option
FM Amount	Controls the amount of Frequency Modulation applied to the filter from the selected source
Mode	Select from 14 options, including LowPass, HighPass, Notch, BandPass (12-, 24-, or 36 dB/oct)

### 7.2.2. MS-20

This is a replica of the filter in a famous, compact patchable synth, as emulated by our MS-20 V software synth.



*Pigments's MultiMode filter*

Parameter	Description
Cutoff	Sets the frequency at which the audio signal will begin to be emphasized or reduced
Resonance	Emphasizes a peak near the cutoff frequency
FM Source	Click the name for a menu and make a selection. Knob becomes grey with "None" option
FM Amount	Controls the amount of Frequency Modulation applied to the filter from the selected source
Mode	Chooses between 12dB lowpass and 6dB highpass modes

### 7.2.3. SEM

One of the most popular analog filters of all time was found in an unassuming little white box known as the SEM (Synthesizer Expansion Module), which was produced by Oberheim in the 1970s and '80s. We have reproduced it here in all of its multi-mode glory.




Parameter	Description
Cutoff	Sets the frequency at which the audio signal will begin to be emphasized or reduced
Resonance	Emphasizes the cutoff frequency
FM Source	Click the name for a menu and make a selection. Knob becomes grey with 'No FM' option
FM Amount	Controls the amount of Frequency Modulation applied to the filter from the selected source
Mode	Changes the mode from BandPass into various shades of LowPass, Notch, and HighPass filtering

Arturia's SEM V also models the oscillators and every other feature of this beloved synth (and then some). Take a look on our website to [learn more](#).

## 7.2.4. Matrix 12

There isn't a synthesizer enthusiast in the world who hasn't drooled at the thought of owning the flagship of all Oberheim synthesizers, the Matrix 12. We've cherry-picked a bunch of its outstanding analog filters and included them in Pigments.

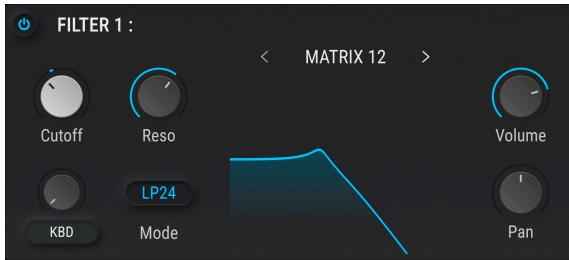


Parameter	Description
Cutoff	Sets the frequency at which the audio signal will begin to be emphasized or reduced
Resonance	Emphasizes the cutoff frequency
FM Source	Click the name for a menu and make a selection. Knob becomes grey with 'No FM' option
FM Amount	Controls the amount of Frequency Modulation applied to the filter from the selected source
Mode	Select one of over a half-dozen of our favorite Matrix 12 V filter models

Arturia's Matrix-12 V models the oscillators and every other feature of this highly sought-after synthesizer, including its modulation matrix. We also added a lot of impossible features, as we always do. Our website has the [details here](#).

## 7.2.5. Mini

This selection is modeled after what is undoubtedly the world's most famous filter: the iconic 24dB-per-octave Ladder filter design that took the world by storm in the 1960s and '70s.

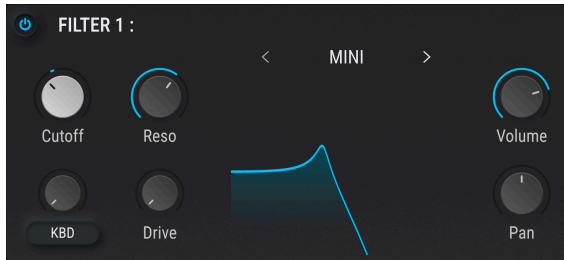

Parameter	Description
Cutoff	Sets the frequency at which the audio signal will begin to be emphasized or reduced
Resonance	Emphasizes the cutoff frequency
FM Source	Click the name for a menu and make a selection. Knob becomes grey with 'No FM' option
FM Amount	Controls the amount of Frequency Modulation applied to the filter from the selected source
Drive	Simulates the technique of running the output signal back into an external input connector

Arturia's Mini V models the oscillators and every aspect of this classic synth, and also includes many features that the original engineers never dreamed. You'll find all the [details on our website](#).

### 7.2.6. Jup-8

In the early 1980s, a renowned instrument maker from Japan released a programmable polyphonic synthesizer that has since become one of the most sought-after vintage synths. The Jup-8 filter type models its lowpass filter.




The Jup-8 filter has 12dB and 24dB per octave modes and has the following parameters.

Parameter	Description
Cutoff	Sets the frequency at which the audio signal will begin to be emphasized or reduced
Resonance	Emphasizes a peak of frequencies that are near the cutoff frequency
Mode	Toggle between 12dB- and 24dB-per-octave slopes
FM Source	Click the name for a menu and make a selection. Knob becomes grey with 'No FM' option
FM Amount	Controls the amount of Frequency Modulation applied to the filter from the selected source

### 7.2.7. Surgeon


This is an extremely steep filter (64dB-per-octave) with several Modes available.

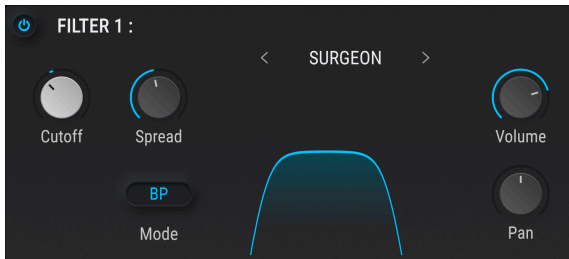

Parameter	Description
Cutoff	Sets the frequency at which the audio signal will begin to be emphasized or reduced
Spread	Only available when Mode = Notch or BP. Controls the width and depth of the affected zone
Mode	Four options: LP, HP, Notch, and BP. Click the Mode window for a menu and make a selection.

## 7.2.8. Comb

A comb filter is created by adding a delayed version of the input signal to itself, which results in a series of reinforced and cancelled harmonics. Pigments' Comb filter includes a feedback loop that is especially good at producing sustained sounds such as plucked strings.

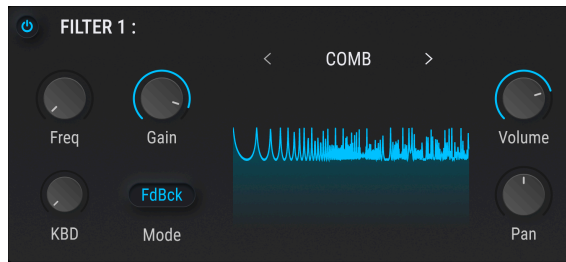

Parameter	Description
Freq	Sets the frequency range of the peaks and notches
Gain	Emphasizes the strength of the peaks and notches
KBD	Adjusts the amount of keyboard tracking for the filter frequency
Mode	Feedback, Feedforward, LP6 (lowpass 6dB), BP6 (bandpass 6dB), HP6 (highpass 6dB)

### 7.2.8.1. Advanced Controls in New Comb Filter Modes

The LP6, BP6, and HP6 filter modes are new as of Pigments 3.5. When one is selected, two new controls appear on the right side.

Parameter	Description
Damping	Controls the frequency of an extra filter present in the feedback loop
All-Pass	Controls the all-pass filter

**Damping** has different effects on the feedback loop depending on which filter mode is selected:

- **LP6:** Higher frequencies decay faster than lower ones, resulting in a natural sound
- **HP6:** Lower frequencies decay faster than higher ones, resulting in a thinner sound
- **BP6:** A band of frequencies in the loop is isolated, resulting in controlled inharmonicities

**i** To best hear the effects of these new modes, try feeding them with short burst of noise such as a transient from the Utility Engine.






♪ The All-Pass knob can alter the sound's harmonics without affecting the fundamental frequency, creating some strange but useful effects.



♪ If you use keyboard tracking on the filter's main frequency, we recommend using it on the Damping as well, set to a modulation value of +0.50.

### 7.2.9. Phaser Filter


This filter is based upon an audio effect that has made frequent appearances in popular music since the 1960s. It is similar to a comb filter in that it uses a series of harmonic peaks and notches to process the input signal, which are usually then modulated with an LFO. This phaser also allows you to define the number of peaks (poles) that will be used.

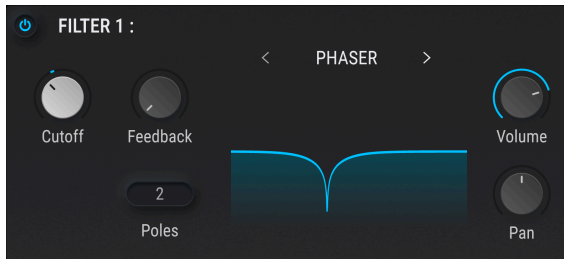

Parameter	Description
Cutoff	Sets the frequency range of the peaks and notches
Feedback	Emphasizes the strength of the peaks and notches
Poles	Sets the number of peaks and notches to be used: minimum = 2; maximum = 12

## 7.2.10. Formant

Arguably the most powerful filter in existence is the human speech anatomy. The Formant filter allows you to generate and modify a wide range of vowel-like sounds and then apply them to the input signal.

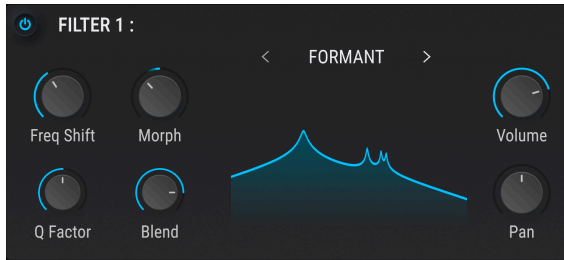


Parameter	Description
Freq Shift	Sets the frequency range of the filter effect
Morph	Shifts the relationships between the resonant peaks of the filter
Q Factor	Emphasizes the strength of the resonant peaks
Blend	Controls the amount of the unprocessed audio signal relative to the filtered signal


## 7.2.11. LowPass Gate

A lowpass gate is a type of filter that can act as a type of voltage controlled amplifier. It works by having a cutoff frequency that is so low that audible signals are not heard when the filter is "closed." Modulating the cutoff frequency with an envelope generator can then cause the "gate" to open and close like a VCA, thereby letting audio through. Early synthesis pioneers discovered that using a filter in this way can result in great tuned-percussion sounds like hand drums, congas, or steel drums. A famous U.S. West Coast synth designer used a Vactrol to design such a circuit.

The LowPass Gate in Pigments provides some extra options: It can act as a traditional lowpass gate, as an actual VCA, or both a lowpass gate and a VCA at the same time.

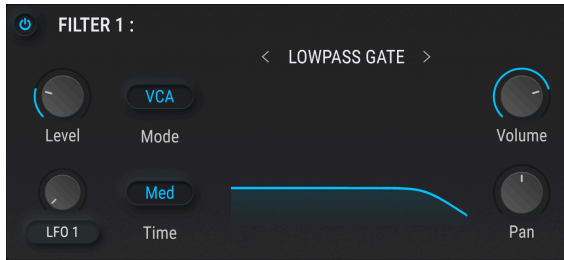


Parameter	Description
Level	Used to manually open and close the filter/gate.
Modulation Amount	Controls the amount of modulation applied to the level knob from your chosen Modulation Source (see below).
Modulation Source	Selects the modulation source used to control the Level knob. The Modulation Amount knob becomes grey when 'None' is selected.
Mode	This drop-down menu can configure Pigments' LowPass Gate to work as a traditional VCA, a LowPass Filter or both.
Time	This parameter sets how quickly the LowPass gate closes after a short impulse for control input with options including 'Fast,' 'Medium,' and 'Slow.' This setting modifies the characteristics of the modeled vactrol and can impart different sonic characteristics on to your signal.

 When modulating the Level parameter with a very fast decaying envelope, the effect is very noticeable, especially in Both mode. In general, traditional vactrol-based gates can open quickly but decay slowly, and this is modeled in Pigments. The decay time depends on the selected mode and is slower in "Both" mode than in VCA mode.

### 7.3. Filter FM Sources

Available sources of FM change depending on the type of filter selected. Keyboard tracking is common to all. A V-shaped icon next to the knob at lower left in each Filter section indicates more sources are available. Clicking it brings up this drop-down menu:

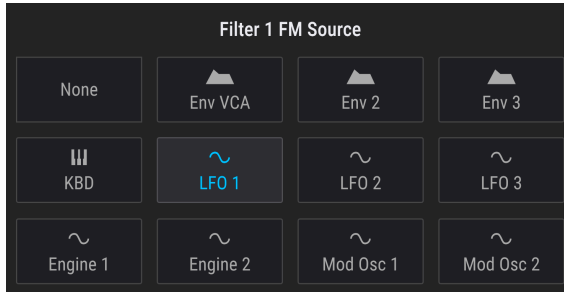


If an option is greyed-out, it is not available for the selected filter type. As of Pigments 3.5, Engine 1 and Engine 2 became available FM sources for the following filter types:


- **Matrix 12**
- **SEM**
- **Mini**
- **Low-Pass Gate**

## 8. FILTER ROUTING/AMP MOD SECTION

This is the final stage of the audio signal. There are only five controls, but they offer a lot of flexibility.


 Each control in this section can be a modulation destination. We will learn more about how to make assignments in the [Modulation Routings \[p.202\]](#) chapter.

### 8.1. Filter Routing

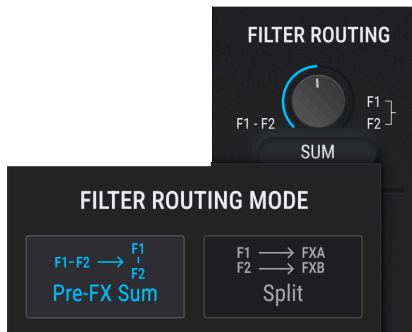

*Filters 1 and 2 are in series and its pop-up menu is deployed*

This filter control allows you to determine whether the filters run in [Series \[p.153\]](#), in [Parallel \[p.153\]](#), or some [combination \[p.154\]](#) of the two. To change the balance, drag the filter routing knob up and down.

 The specific parameters of the filters themselves are described in the [Filters chapter \[p.138\]](#).

#### 8.1.1. Filter Routing Drop-Down Menu

Below the **Filter Routing** knob is a pup-up menu with two choices that determine how the filters send their signals to the FX busses.

- **Pre-FX Sum:** Sends their output to both busses according to the position of the Filter Routing knob.
- **FX Split:** Offers the option to send the output of Filter 1 to FX Bus A and Filter 2 to FX Bus B; or send Filter 1 to FX Bus B and Filter 2 to FX Bus A.

### 8.1.2. Filters in Series




Filters 1 and 2 can be placed in series, which means the output of Filter 1 is fed directly into the input of Filter 2. This allows for incredibly precise filtering of a single signal – especially given all the different filter types offered in Pigments!

To achieve this, drag the **Filter Routing** knob counterclockwise. When the cursor reaches the lowest possible Filter Routing setting the value displayed will change to **F1 -> F2** as shown above. This means the filters are fully in series.

**i** If Filters 1 and 2 are placed in series and panned to the opposite extremes (Filter 1 hard left, Filter 2 hard right, or vice versa), no audio signal will be heard from Filter 1. Also, if Filters 1 and 2 are 100% in series and the Filter 2 volume is at zero, no audio signal will be heard at all, even if the filters are bypassed.

### 8.1.3. Filters in Parallel



The filters can also be placed in parallel, which allows the individual character of each filter to be applied separately and to appear independently at the outputs.

To achieve this, drag the **Filter Routing** knob clockwise. When the cursor reaches the highest possible Filter Routing setting the value displayed will change to **F1 // F2** as shown above. This means the filters are fully in parallel.


### 8.1.4. Blending Parallel and Series



To create a blend of both the series and parallel filter routings, drag the **Filter Knob** to a position midway between its limits. When the Filter Routing setting is anything other than fully clockwise or fully counter-clockwise, the value displayed will change to something like **70% F1 -> F2, 30% F1 // F2** as shown above. The displayed percentages will be different depending on the value you select.

**i** There are hundreds of intermediate settings between series and parallel because this value can be fine-tuned by right-clicking or holding the Control key and dragging the cursor.

### 8.1.5. FX Sum vs FX Split Modes

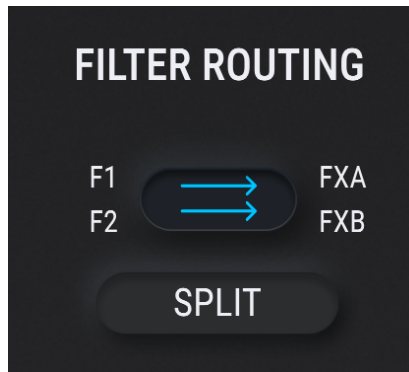

*The filter blend knob is not available in FX Split mode*

When **Sum** is selected from the pop-up menu, the FX busses are together receiving the joint output of whatever the filters are doing, and of their serial/parallel blend given the knob position.

When **Split** is selected instead, Filter 1 is hardwired to FX bus A and Filter 2 to FX bus B. This *forces* them to run in parallel only. That is why the knob disappears.


**i** ! The lesson is, the Sum/Split options are *not* equivalent to choosing serial or parallel routing! Given the screen graphics, it's possible to think they are.

## 8.2. VCA section

### 8.2.1. Amp Mod

The output level of each Preset may be modulated by any one of 24 sources: velocity, an LFO, the Modulation Wheel, or one of the more esoteric sources such as a Function Generator or Combinator.

#### 8.2.1.1. Amp Mod Sources

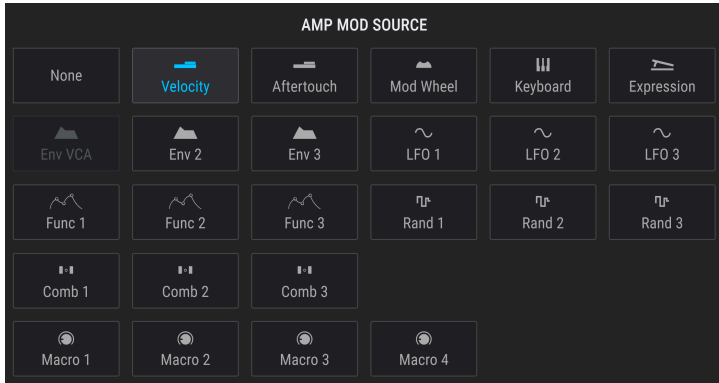

*Amp Mod Sources*

To select one of the Amp Mod sources, click the drop-down menu above the Amount control. A checkmark will indicate the current selection. To make a different selection, click the name of the source you would like to use. The menu will close once the selection is made. (Note that Env VCA is greyed-out because it is always hardwired to the output level anyway).

To close the menu without changing the current selection, click anywhere else inside Pigments.




### 8.2.1.2. Amount

Use the knob above the Amp Mod source pop-up to set the amount of amplitude modulation that will be introduced by the source. When the Amount is at 0 (fully counter-clockwise) no modulation will occur to this parameter, and the Preset will always be capable of maximum amplitude.


For example, select the Default preset, which has the Amp Mod source set to Velo (Velocity) and the Amount set to zero. Then do the following:

- Play the same note repeatedly at different velocities. There will be no change in the output level.
- While playing a consistently low-velocity note, increase the Amount. The output level will decrease.
- Leave the Amount control at 1.00 (maximum modulation range) and play notes at a velocity of 127 (maximum)
- Double-click the Amount control to reset it to 0.00 (no modulation range). Max velocity will produce the same output level as when the Amount was set to 1.00.

 When the Amount is at 0, velocity and other sources might still be modulating oscillator volume or filter settings, for example, so a zero value here does not mean the sound will remain at a constant output level.

Remember also that since there is a Mod ring around the control, it is possible to modulate the Amp Mod amount with another source. For example, you could use keyboard velocity to increase the amount of LFO being applied to the amplitude.

### 8.2.2. Voice Pan and Send Level

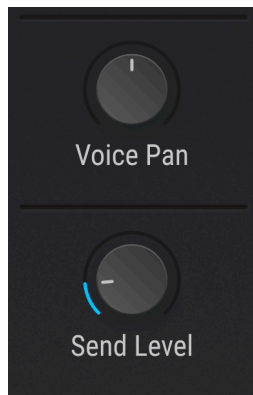

Use the **Voice Pan** control to set the default stereo position of the preset. All triggered voices will start from this position unless a modulation is active.

The **SendLevel** knob determines the level at which the sound of the Preset will be passed to the Aux Bus effects chain. It shares the setting of the [Send control \[p.162\]](#) on the [FX tab \[p.157\]](#); moving one will also edit the other.

## 9. THE EFFECTS TAB


Having a good set of audio processing effects can help provide the final polish for your music. This is accomplished through the judicious use of chorus, compression, delay, reverb, and EQ, among other things. Effects can also help rough things up a bit by adding distortion, bitcrushing, wavefolding, or even some radical EQ settings. And to tie everything together, many effects can be synchronized to the tempo of your song.

Pigments is well-stocked in this department! It offers three sets of identical effect chains that can be routed in several ways. Each effect chain itself contains three effects processors, for a total of nine effects that can be applied to your sound.

On top of that, everything is MIDI-assignable, and many parameters can be modulated by synthesizer features such as envelopes and LFOs (pro tip: look for the [Mod rings!](#) [p.207]).

### 9.1. Common FX Features

#### 9.1.1. Bus/Aux Tabs

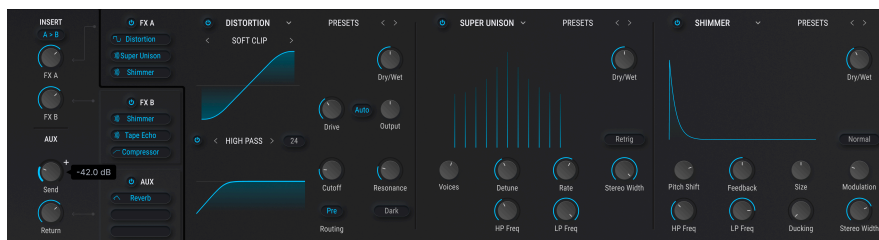


*FX tabs are selected vertically on the left, with interfaces for each effect in that bus populating from left to right*

Each effect chain is accessed by selecting its tab. Each tab has three subdivisions, with each of those containing an independent effect processor identical to the others.

The beauty of this arrangement is that any one of the 18 effects can be placed in any order within an effect chain. For example, if you want EQ->Chorus->Reverb, Reverb->Chorus->EQ, or any possible combination of any of the effects in any order, it can be done. This allows for over 2500 possible combinations within a single effects bus. And there are three effects buses, two of which can be routed in series, or you can route all three in parallel. The possibilities are staggering!

### 9.1.2. FX Type Selection

To select an effect within an FX tab, click its name field inside its subdivision of the tab. A menu will open and reveal the list of 16 available effects, with the current selection outlined.

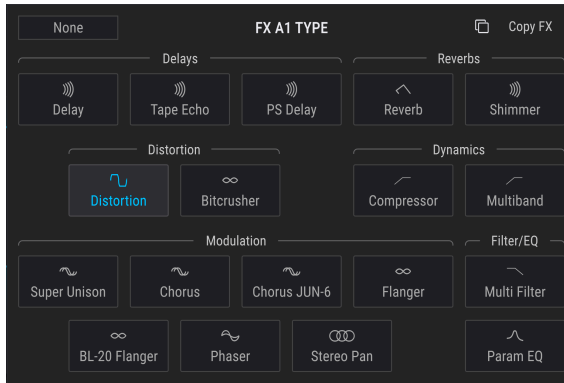


*FX type selection*

Choose the effect you want and the menu will close. You can also keep the current selection; just click the name field again (or anywhere else in the Pigments window) and the menu will close.

### 9.1.3. Effect Presets

Each effect type has factory presets, plus the ability to store and recall your own creations. So if there's one you'd like to "borrow" to see how it works with another Pigments preset, it couldn't be simpler. First, save the edits you've made so you can recall them later. Then click the Presets field inside the effect window and select the one you'd like to audition.

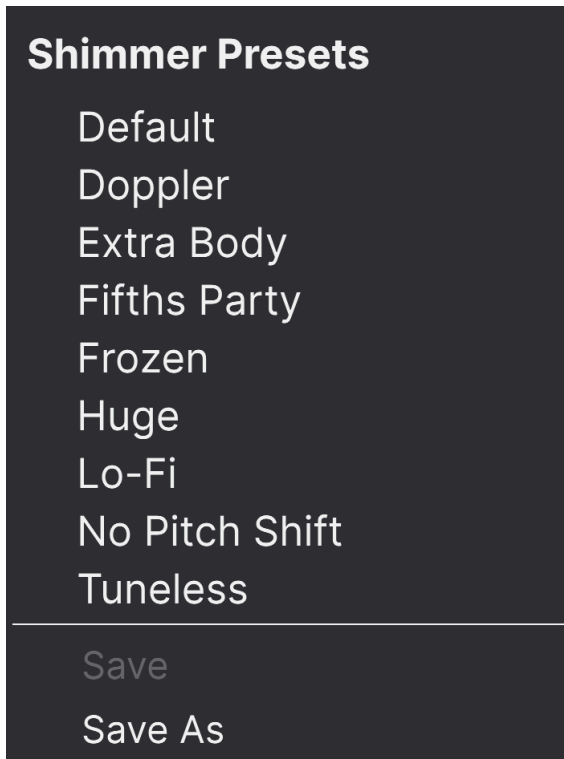

*The preset menu for each FX type will be different; this one is for the new Shimmer reverb in Pigments 4*

If the factory preset is "almost but not quite" what suits the current project, make a few tweaks and use the Save As feature. Give it a name and it will show up in the User preset area. To delete any non-factory preset, click the X next to its name. to delete it. You will be prompted to confirm.

### 9.1.4. Effect and Bus bypass (on/off switches)

All effects have an on/off switch, letting you bypass the effect. When an effect is switched off (bypassed), audio signals will still pass through that effect, but will not be processed. This makes it easy to A/B your wet (effected) and dry (unaffected) signals.

The Pigments busses also have on/off switches. Switching a bus off means that an incoming signal will not be sent through the rest of the bus.

When an effect or bus is switched off, the controls are dimmed and greyed out to make it clear that it is not active. However, it is still possible to make edits to the controls.


### 9.1.5. Change FX Order

It's easy to experiment with how the sound is affected when the order of the effects is changed. All you have to do is click the four-way arrow icon of the effect you want to move and drag it where you want it.

#### 9.1.5.1. Swap and Copy FX

You can drag any effect to a different slot within the same FX bus. You'll see the effect switch from one FX tab subdivision to another as you drag it to its new location. When the cursor is released the change will be made.

You can also copy any individual effect to a different slot. Click the double-squares icon in the FX Type menu for a drop-down of available slots.

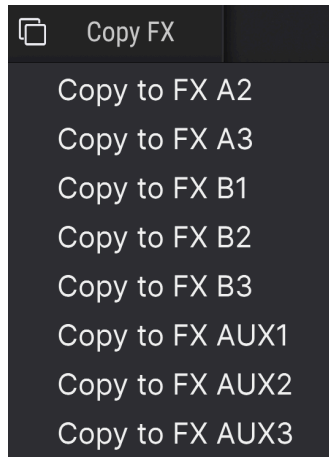


#### 9.1.5.2. Swap Between FX Busses

You can drag any effect to a slot within a different effect bus:

You'll also see the effect switch from one FX tab to another as you drag it to its new location. When the cursor is released the change will be made.

## 9.2. Bus A/B Routing

Each effects bus is powerful, but they become even more so when their potential is combined. Bus effects A and B may be routed in series, reverse series, or parallel, by selecting the desired configuration in the Bus A/B Routing section at the very upper left of the Effects view.

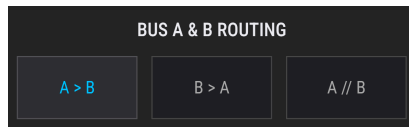

When one of the two series configurations is selected, it is possible to have as many as six effects sculpting your sound at the same time, one after the other.

In addition to that, the [FX Aux bus \[p.161\]](#) can be processing the same signal in parallel to the A/B buses. It has three identical subdivisions too, so there are lots of options.

### 9.2.1. Series

The signal from Bus A flows into and through Bus B, and from there to the outputs.

### 9.2.2. Reverse Series


The signal from Bus B flows into and through Bus A, and from there into the outputs.

Each effect will be described in its own section later in this chapter.

### 9.2.3. Parallel

The signals from Bus A and Bus B flow independently into the outputs.

## 9.3. FX Aux Tab

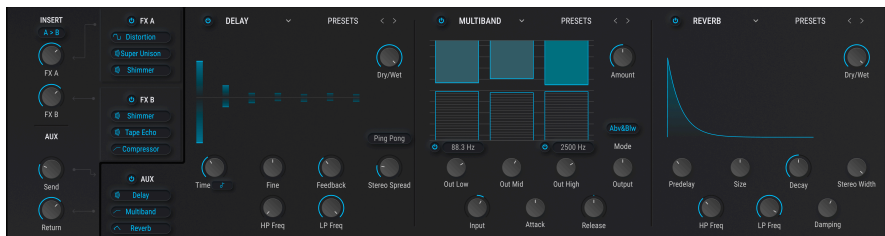

The FX Aux tab has three effect slots that are identical to those ins FX buses A and B, so everything that you can do with one of those buses, you can do here.

## 9.4. Effects Insert/Send sections

These sections give you the final say on how much of the effected signals from each FX Bus will be heard at the outputs.



### 9.4.1. Bus A/B Volume controls

Use these controls to balance the output of FX buses A and B relative to each other and the FX Send bus. The behavior is different depending on the configuration:

- **Series:** If the output of FX Bus A is overdriving the input of FX Bus B, reduce its output level and compensate for the reduction by increasing the output of FX Bus B. When the two buses are in reverse series order, reduce the output of B to avoid overdriving A, etc.
- **Parallel:** The output levels of FX buses A and B are independent, so reducing one will not affect the sound of the other.




When FX buses A and B are in series, nothing will be heard from either bus if the output volume of one of those is set to zero (-70.0 dB).

### 9.4.2. Aux Bus Send control

The Send control of the Aux Bus determines the level at which any active voices will be sent to the FX Aux bus. It is the same parameter controlled by the [Send Level knob \[p.156\]](#) in the [Output section \[p.152\]](#) of the Synth tab; moving this one will also edit that one. It is identified as the Voice Send Level in the lower tool bar.

### 9.4.3. Aux Bus Return control

Use the Aux Bus Return control to balance the output of the FX Aux bus relative to FX buses A and B.


 There will be no sound output if all three of the FX buses have their output volumes set to zero (-70.0 dB). To hear a dry signal, select the None setting for all active effects or change the Dry/Wet balance to 100% dry for each effect.



## 9.5. Effect Parameters

Effects in Pigments are organized into six types, as shown in the FX type menu: Delays, Reverbs, Distortion, Dynamics, Modulation, and Filter/EQ. This next section covers all the parameters of each.

### 9.5.1. Delay

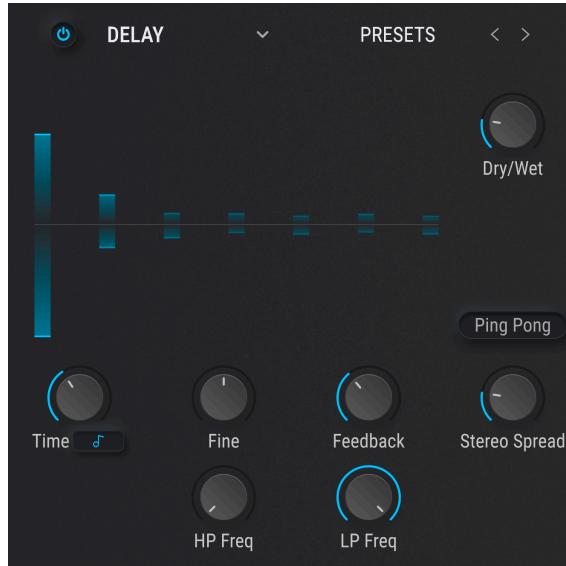


*The Delay effect*

A delay can increase the spaciousness of a sound by providing echoes within the stereo field. It can also be used as a rhythmic counterpoint to accentuate a groove. This effect supports full stereo thanks to its stereo in, stereo out design.

Control	Description
Dry/Wet	Controls the balance between the input signal and the delayed signal
Time / Time Div	Changes the length of the delay, with synced and asynchronous options
Fine	Lets you fine-tune the delay time (set by the Time / Time Dev. knob) with +/- 30ms of delay time. The default 12:00 position provides 0ms delay. Turning the knob clockwise adds to the overall delay time whereas turning counter-clockwise reduces from the delay time.
Feedback	Adjusts how many times the delay will repeat
HP Freq	Higher values cause increased reduction of low-frequency content with each echo
LP Freq	Higher values cause increased reduction of high-frequency content with each echo
Stereo Width	Higher values increase the distance between the left and right iterations of the echoes
Ping Pong	Toggles alternating left/right echoes with exact rhythmic spacing

## 9.5.2. Tape Echo

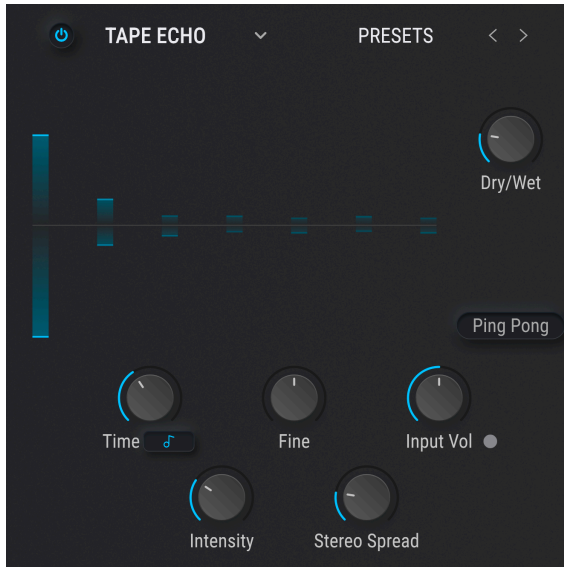


*The Tape Echo effect*

Tape Echo is an effect similar to the Delay effect (described above) except that the effect traditionally relies on analog tape loops. The Tape Echo effect within Pigments models the analog warmth and tape saturation to create a fantastic analog-style delay that is different from the other Delay effect described above.

Control	Description
Dry/Wet	Controls the balance between the input signal and the echoed signal
Input Vol	Adjusts the incoming signal to achieve varying amounts of analog saturation (or even distortion) which is then repeated.
Time / Time Div	Changes the length of the delay, with synced and asynchronous options
Fine	Lets you fine-tune the delay time (set by the Time / Time Dev. knob) with +/- 30ms of delay time. The default 12:00 position provides 0ms delay. Turning the knob clockwise adds to the overall delay time whereas turning counter-clockwise reduces from the delay time.
Intensity	Sets the feedback amount of the delayed signal.
Stereo Width	Higher values increase the distance between the left and right iterations of the echoes
Ping Pong	Toggles alternating left/right echoes with exact rhythmic spacing

### 9.5.3. Pitch-Shifting Delay

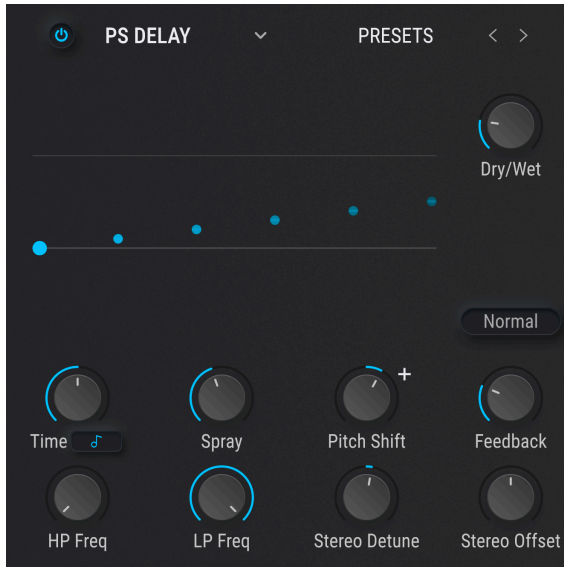

*The Pitch-Shifting Delay effect*

This effect is like an analog delay, but with control over how the delayed signal shifts in pitch relative to the incoming signal.

Control	Description
Time / Time Div.	Sets delay time, with drop-down options for syncing to straight, triplets, or dotted values.
Dry/Wet	Controls the balance between the input signal and the delayed signal
Stereo Offset	Offsets the delayed signal in the stereo picture
Harmonize Mode	Button selects Normal, Octave Up, or Octave Down
Feedback	Controls how much of the delayed signal feeds back into the effect to be delayed again.
Stereo Detune	Detunes the delayed signal relative to the incoming signal
Pitch Shift	Adjusts the amount that the delayed signal is pitch-shifted relative to the incoming signal
Spray	Adds jitter to the delay time
HP Freq	Controls the cutoff of a highpass filter that affects the delayed signal only
LP Freq	Controls the cutoff of a lowpass filter that affects the delayed signal only

### 9.5.4. Reverb



*The Reverb effect*

A Reverb effect creates a large number of echoes that gradually fade or "decay". It simulates how the input would sound in a room or a large space.

Control	Description
Dry/Wet	Controls the balance between the input signal and the reverberated signal
Input LP	Reduces the high-frequency content before processing
Input HP	Scoops out the low-frequency content before processing
Pre-delay	Sets the amount of time before the input signal is affected by the reverb
Decay	Determines the length of time the reverb effect will last
Size	Adjusts the size of the room: counter-clockwise is smaller, clockwise is larger
Damping	Controls the rate at which the high frequencies decay
MS Mix	Adjusts the reverb from mono to an increasingly wide stereo space

### 9.5.5. Shimmer


Shimmer is a reverb with a couple of twists: a feedback loop that feeds the output into a pitch shifter, and a ducking control so you can sidechain the reverb off the input signal.



*The Shimmer effect*

Control	Description
Dry/Wet	Controls the balance between the input signal and the reverberated signal
Pitch Shift	Sets the pitch shift amount in semitones
Feedback	Adjusts the level of the signal fed into the pitch shifter
Size	The size of the virtual reverb room
Modulation	Sets the amount of modulation applied to the reverberated signal
HP Freq	Sets cutoff of the input highpass filter
LP Freq	Sets cutoff of the input lowpass filter
Ducking	Applies sidechain to the reverb output based on the input signal
Stereo Width	Varies the width of the reverb signal from mono to wide stereo
Harmonize button	Mode Sets the range at which the pitch-shifted signal relates to the input: Normal, Octave Up, or Octave Down

### 9.5.6. Distortion

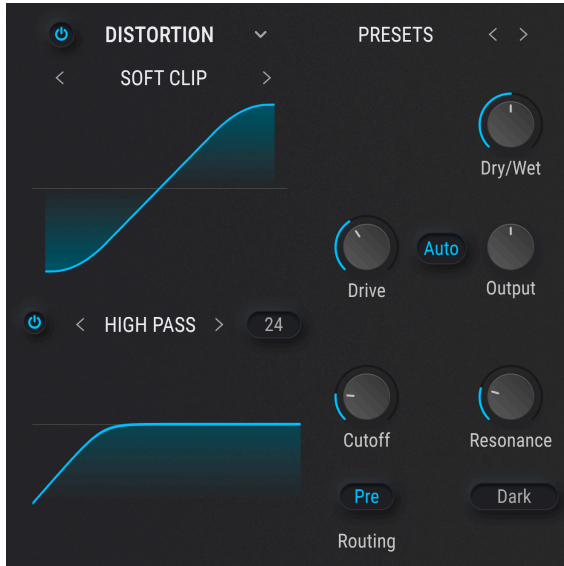

*The Distortion effect*

Distortion in Pigments goes far beyond the typical fuzz pedal effect, though it can certainly do that. Thirteen new algorithms cover everything from soft clipping to analog tape saturation to wavefolding. There's also an integrated multimode filter that can be routed pre- or post-distortion. Note that as of Pigments 3.5, the Overdrive and Wavefolder effects are now algorithm types in Distortion, not separate effects.

Control	Description
Dry/Wet	Controls the balance between the input signal and the distorted signal
Drive	Sets the distortion amount
Auto	Engages automatic gain compensation to avoid undesired loud peaks
Type	Drop-down menu to select algorithm type
Out Gain	Use this to compensate for increased output gain caused by the other settings
Filter on/off	Toggles integrated filter in or out
Filter menu	Pop-up selects lowpass, highpass, bandpass, or notch modes
Cutoff	Adjusts cutoff/center frequency of integrated filter
Resonance	Adjusts resonance of integrated filter
Slope button	Selects the filter steepness, 12, 24, or 36dB-per octave
Routing	Places filter pre- or post-distortion
Dark	Adds a fixed low-pass filter post-distortion



! The Dark filter is independent of the integrated filter, with a cutoff frequency of 6kHz and a slope of 12dB per octave.



! As of Pigments 3.5, the Overdrive and Wavefolder effects are now algorithm types in Distortion, not separate effects.

### 9.5.7. BitCrusher



*The BitCrusher effect*

This bit-reducing effect offers several ways to deconstruct the sound. As the number of bits used to express the sound is reduced, details will gradually disappear.

Downsampling is another form of audio entropy that can provide just the right measure of de-evolution to your sound. As the sample rate is reduced, aliasing is introduced in the higher harmonics, which can produce sub-harmonics as well. For a truly lo-fi experience, the sample rate can be reduced to as low as 1/80th of the original.

Control	Description
Dry/Wet	Controls the balance between the input signal and the crushed signal
Bit Depth	Reduces the number of bits used to render gradations in amplitude. Range: 1.50 to 16.0 bits
Downsample	Divides the sample rate used to represent the signal. Range: 1.00x to 80.0x
Scale	Increases bit quantization precision at lower volumes
Jitter	Adds randomness to the downsampling frequency
Smooth	Activates a gentler mode of bit-crushing
HP Freq	Sets cutoff of the input highpass filter
LP Freq	Sets cutoff of the input lowpass filter



## 9.5.8. Compressor




*The Compressor effect*

A compressor is generally used to help maintain a consistent level of sound, though there are many other ways to use one.

For example, it can keep the attack transients of a sound from overloading the input of the next effect. It can also help a sound which would normally decay quickly not to fade away as quickly.

Control	Description
Dry/Wet	Controls the balance between the input signal and the compressed signal
Threshold	Sets the level where compression will begin
Ratio	Determines the amount of compression to be applied once the threshold is reached
Makeup	Enables automatic control of the output level
Attack	Adjusts the speed with which the compression will be applied once the threshold is reached
Release	Sets the release curve of the compressor
Output Gain	Use this to compensate for changes in volume if compression settings lower the output gain
Reduction meter	Provides visual feedback about the amount of compression being applied to the sound

## 9.5.9. Multiband

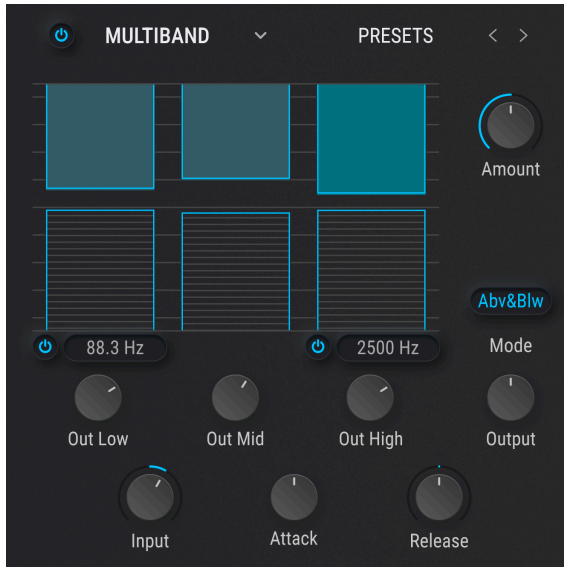

*The Multiband Compressor effect*

Being able to compress different parts of the frequency spectrum separately is a key technique in modern music production. Pigments' Multi-Band Compressor offers up to 3 independent bands and expansion of quiet signals as well as compression of loud ones.

Central to its operation are the three bar-shaped columns. These represent the threshold and ratio of each band. The upper bars control compression; the lower bars, expansion.

Control	Description
Threshold	Drag the top or bottom of a bar to adjust the point at which the compression (or expansion) starts working
Ratio	Drag inside of a bar to adjust the amount of compression for that band. Increasing ratios are depicted by denser horizontal lines, until the bar turns blue at maximum
Band On/Off Icons	The high and/or low bands may be switched off, resulting in a 2 or 1-band compressor/expander
Low-Mid Crossover	Drag on this field, located above the low band, to change the crossover point between the low and mid bands
Mid-High Crossover	Drag on this field, located above the high band, to change the crossover point between the mid and high bands
Above/Below Toggle	This drop-down above the mid band selects whether the bars for both compression and expansion (Abv&Blw), or just the bars for compression (Above Only) are displayed
Input	Sets the Multi-Band Compressor's overall input gain
Amount	Sets the overall compression/expansion while preserving the ratio and threshold differences between the bands
Attack	Sets the time it takes for the compressor/expander to "grab" the signal once a threshold is reached
Release	Sets the time it takes for the compressor/expander to "let go" of the signal once the signal falls beneath the threshold
Band Outputs	Each band has its own output level control to the master bus. This is also called makeup gain
Main Output	Located at right, the main Output knob governs the overall makeup gain while preserving the difference in output between the bands



! Using a ratio below 1:1 on the expansion bands can add a *huge* amount of unexpected gain, overwhelming loudspeakers and ears.

### 9.5.10. Super Unison

Not unlike a synth's Unison mode, this effect adds duplicates of the input signal to itself, with the option to detune them via modulation. The graphic indicates amount of detuning horizontally and volume of detuned voices vertically. The original signal is the tallest line in the center.



*The Super Unison effect*

Control	Description
Dry/Wet	Controls the balance between the input signal and the unisoned signal
Voices	Sets the number of unison voices
Detune	Determines the detuning amount
Rate	Adjusts the speed of modulation applied to the detuning
Stereo Width	Adjusts the spread of the voices across the stereo picture
Retrig	When engaged, the voices' phase are reset when a key is pressed
HP Freq	Controls the cutoff of a highpass filter that affects the processed signal only
LP Freq	Controls the cutoff of a lowpass filter that affects the processed signal only

### 9.5.11. Chorus



*The Chorus effect*

A Chorus effect is similar to a flanger, except the range of the delay time prior to modulation is longer than that of a flanger. This results in a more subtle but still very interesting effect.

Control	Description
Dry/Wet	Controls the balance between the input signal and the chorused signal
Delay	Sets the amount of delay applied to the input signal
Depth	Controls the depth of the chorus
Rate	Adjusts the speed of the chorus
Feedback	Adjusts the amount of chorused signal that is fed back into the effect
Voices	Selects the number of delay lines the chorus will use, with a different starting phase for each voice
Square	Toggles modulation LFO between sine and square waveforms
Stereo	Switches the chorus between mono and stereo output

### 9.5.12. Chorus JUN-6




*The JUN-6 Chorus effect*

A popular Japanese synthesizer used a chorus effect to fatten up its single oscillator. This sound has become sought after in its own right, and this effect models it perfectly.

Control	Description
Dry/Wet	Controls the mix of dry and chorused signals
Rate	A pop-up selects whether the rate is in absolute Hz or syncs to binary, dotted, or triplets values relative to master tempo
Depth	The depth of the chorus effect in milliseconds
Phase	The phase of the chorused signal relative to the dry signal

**i** Use two JUN-6 choruses in FX Busses A and B with different phase settings for a super wide stereo image.

### 9.5.13. Flanger

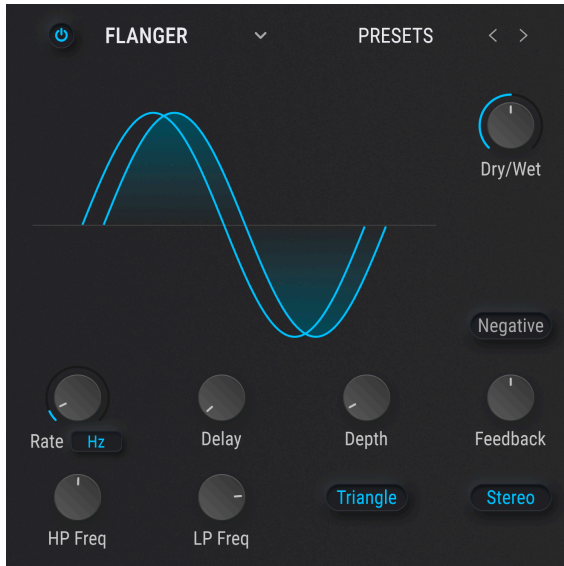


*The Flanger effect*

Flanging works by mixing two identical signals together, with one signal delayed by a small and gradually changing period. This produces a swept “comb filter” effect.

Control	Description
Dry/Wet	Controls the balance between the input signal and the flanged signal
Delay	Adjusts the length of the delay, which changes the harmonic content
Depth	Sets the modulation depth
Rate	Controls the modulation rate for the delay time, including sync and freerun options
Feedback	Adds feedback for a harsher or “ringing” sound. Maximum is 99% to avoid runaway feedback
LP Freq	Use this to define the amount of high-frequency content that will enter the flanger effect
HP Freq	This determines the amount of low-frequency content that the flanger effect will receive
Negative	Changes flanger feedback to subtractive rather than additive
Stereo	Will switch the flanger output between mono and stereo
Triangle	Toggles the modulation LFO between sine and triangle waveforms

### 9.5.14. BL-20 Flanger

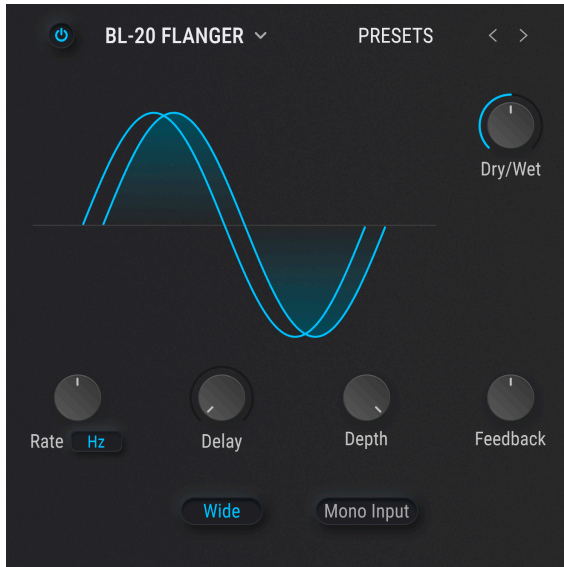


*The JUN-6 Chorus effect*

This emulates the sound of the Bel BF-20, a rare flanger from the 1970s. Its sound is achieved by modulating a delayed version of your signal using an LFO.

Control	Description
Rate	Rate of the LFO that modulates the delayed signal. A pop-up selects whether the rate is in absolute Hz or syncs to binary, dotted, or triplet values relative to master tempo
Dry/Wet	Controls the mix of dry and flanged signals
Delay	Adjusts the audible depth of the flange effect
Feedback	Sometimes called regeneration, this adjusts the amount of effected signal feeding back into the flanger.
Depth	Adjusts the depth of the LFO that modulates the delayed signal
Wide	Provides a wider stereo image by inverting the phase of the LFO modulating the right channel
Mono Input	When engaged, optimizes the flanger for processing a monaural signal



### 9.5.15. Phaser

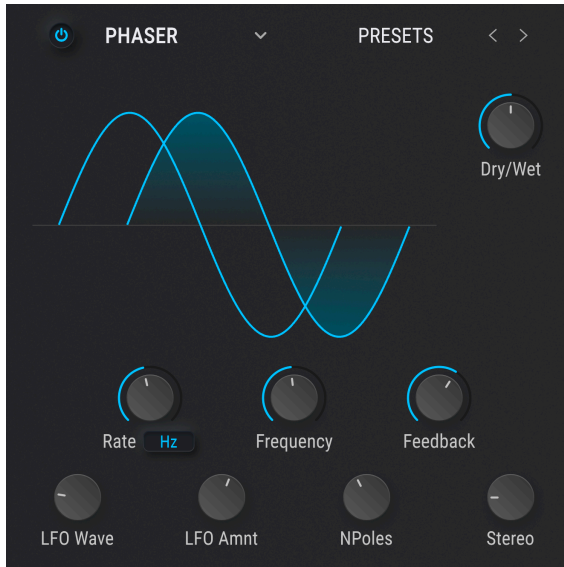

*The Phaser effect*

Phase shifting splits the incoming signal, changes the phase of one side, and recombines it with the unaffected signal. Modulation of this signal results in a notch-comb filter that sweeps through the frequency spectrum, causing that familiar “whooshing” sound.

Control	Description
Dry/Wet	Controls the balance between the input signal and the phase-shifted signal
Frequency	Sets the harmonic center for the modulation effect
Feedback	Controls the amount of phaser resonance
LFO Wave	Selects one of six modulation waveforms: Sine, Triangle, Saw, Ramp, Square, Sample & Hold
LFO Amnt	Determines the depth of the modulation effect
Rate	Controls the speed of the phaser effect, with sync options and without
N Poles	Determines the steepness of the filter frequency response
Stereo	Gradually changes the phaser from mono to stereo output

### 9.5.16. Stereo Pan



*The Stereo Pan effect*

This is an LFO-driven effect that moves the signal from left to right in the stereo field. It can move the signal left and right ever-so-slightly from center, or it can swing wider and wider until it covers the entire range. It can also refrain from panning low-frequency signals, creating a sense of stability in the bass.

Control	Description
Mono Bass	When engaged, low frequencies will not be panned
Cutoff	Selects the frequency below which panning stops when Mono Bass is engaged.
Amount	Controls the amount of deviation from center
Rate	A drop-down menu selects whether the rate is in absolute Hz or syncs to binary, triplets, or dotted values relative to master tempo
Invert Button	Inverts the LFO output, thus changing the "direction" of panning
Natural/ Linear Toggle	Natural mode balances the dry and panned signals; in Linear mode you hear the panned signal only

## 9.5.17. Multi Filter




*The Multi Filter effect*

As if having two incredible filters weren't enough, Pigments provides yet another in the FX section. It has all of the essentials in 12-, 24-, and 36 dB/octave forms, each with lowpass, highpass, and bandpass options. Both comb filter types are available here, too: CombFB (Feedback) and CombFF (Feedforward).

Use this effect to carve out or emphasize harmonics in the final sound. And don't forget that you can modulate anything with anything!

Control	Description
Dry/Wet	Controls the balance between the input signal and the effected signal
Freq / Comb Freq	Sets corner frequency/frequencies for the filter: 20-20kHz (LP/HP/BP) or 20-2kHz (CombFB/FF)
Q	Increases or decreases the amount of emphasis at the corner frequency / frequencies
Mode	Chooses the filter type: lowpass, highpass, bandpass, notch, comb feedforward, or comb feedback
Slope	Click the field and drag up/down to select the filter steepness (LP/HP/BP only)

### 9.5.18. Param EQ

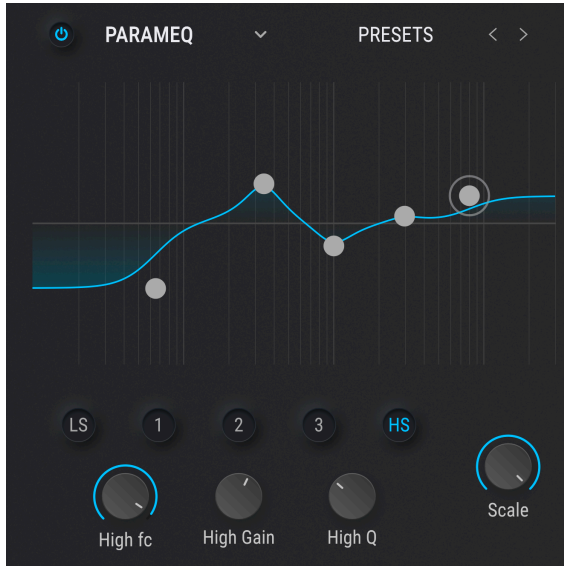

*The Parametric EQ*

Pigments offers a five-band fully parametric equalizer. An equalizer (EQ) selectively amplifies or attenuates frequencies in the frequency spectrum. A parametric EQ allows you to adjust the range that will be affected by its frequency bands (i.e., the Q, or width).

Many parametric EQs take the easy way out and use shelving EQs for the lowest and highest frequency ranges, but Pigments allows you to adjust the Q for all 5 frequency bands.

The circles in the picture correspond to the controls below the curve visualizer. The circles may be dragged around, which adjusts the frequency and the gain of the selected band at the same time. A right-click on the circle will adjust the width of that band as you drag the cursor up and down.

You can also select a particular EQ band by clicking on its tab below the curve visualizer.

Control	Description
Curve visualizer	Provides visual image of EQ curves
Low / Peak X / High fc (frequency)	Sets center frequency of band: Low 50-500 Hz; mids 40-20kHz; High 1k-10kHz
Low / Peak X / High gain	Each control adjusts the gain of its EQ band
Low / Peak X / High Q	Sets width of band: Low / High range: 0.100 - 2.00; Peak X ranges 0.100 - 15.0
Scale	Controls the gain of all EQ stages at the same time

## 10. THE SEQUENCER TAB



*The full Arpeggiator/Sequencer window in Sequencer mode*

The importance of step sequencers and arpeggiators in today's music cannot be overstated. There's something inspiring and intriguing about them to creators and their audiences; the way the rhythm and sound interact over time makes the music seem multi-dimensional, at times transcendent.

Unfortunately, there is always the risk that the interactions of human and machine might fall into the rut of sameness, unless the artists' tools are diverse and deep. But they must remain uncomplicated, to allow creativity to flow freely.

To that end, with its Arpeggiator and Sequencer Pigments achieves an artful balance between user input and the spontaneous generation of data. Pigments allows your music to evolve as you direct the process as much or as little as you like.

### 10.1. Arp/Seq Shared Features

#### 10.1.1. Arp/Seq Mode Selection

Select the desired mode by choosing either the Arp button or the Seq button. Playback will begin with the first incoming MIDI note. To stop playback, make sure the Hold button is set to Off and then let go of the note(s). To prevent a Sequence or Arpeggio from launching when a note is played or received, click the Off button.


**i** One feature not shared by the Arpeggiator and Sequencer is the top track: The Sequencer has a definable pitch value for every step, but the Arpeggiator does not. This is because the pitch of each Arpeggiator step is defined by you: the notes played on a keyboard controller, MIDI notes from a track of your DAW, etc.

### 10.1.2. Pattern Length

The maximum length of a pattern is 16 steps. But this can be adjusted to any value between 1 and 16 steps, so when combined with the various tempo sync options, some very interesting time signatures can be achieved.

To change the length of the entire pattern, hover the cursor over the thick grey line at the end of the last step in the pattern. The cursor pointer will change into a left/right arrow.

Next, click the line and pull it to the left or right, depending on the length of the current pattern. When you've reached the desired step boundary, release the cursor.

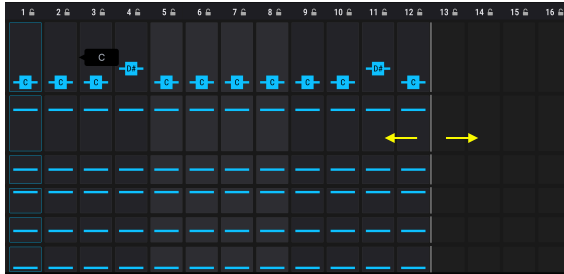

There's also a way to set each track to an independent length. This feature is called [PolyRhythm mode \[p.194\]](#).


### 10.1.3. Tracks

The largest section of the Arp/Seq window has six parallel tracks, each of which represents a different type of data that can be manipulated and sent by the Arpeggiator or the Sequencer, whichever is active. Here's a quick breakdown of what each track contains.

#### 10.1.3.1. Pitch [Seq only]

Each step in the Pitch track can have its own semitone value within a one-octave range. There is a separate track for the octave value, as described in the next section.

By default the Pitch values conform to a chromatic scale (i.e., 12 notes). These values can be filtered by selecting one of [15 Scales \[p.197\]](#).


 The Pitch track is not available in Arp mode, because pitch values are defined by incoming MIDI data. So instead of a Random/Reset window, this track displays the Arpeggiator Mode menu. It contains six options that determine the note order for the Arpeggiator.

#### 10.1.3.2. Octave

Each step of the Octave track can be set to a value within the range of +/- 2 octaves. The pitch value has its own track, as described in the previous section.

#### 10.1.3.3. Velocity

Each step of the Velocity track can have a different value between 1 and 127. The result can be affected by an incoming MIDI note combined with the setting of the "As Played" parameter in the [Velocity Random/Reset window \[p.190\]](#).

 Since you can use velocity as a modulation source for lots of things other than the volume of notes, this track offers a lot of creative possibilities.

#### 10.1.3.4. Trig Probability

It is possible to introduce a level of uncertainty with the Trigger Probability parameter, which determines the likelihood that a given step will play back when it is reached. If you always want a certain step to trigger, set this parameter to 100%. If you want silence at that step every time, set its Trigger Probability value to 0%.

### 10.1.3.5. Gate Length

Individual steps within the sequence can have different Gate Length times by adjusting this parameter. The range is from 5% of the full step (very short) to 400%, which will make the note sustain for four full steps.

The result can be affected by the Play Mode setting in the lower tool bar. For example, if the Play Mode is set to Poly 16, any notes longer than 100% of the step value will continue to sustain until their Gate Length has been reached. But if the Play Mode is set to Mono or Legato, any notes longer than 100% of the step value will be cut off if one of the later steps triggers before the Gate Length duration for the original step has been reached. This is similar to what happens when a mono lead sound is played in a legato manner.

### 10.1.3.6. Slide

This parameter is also known as "slew." It controls the speed at which the pitch value of the current step will transition from the pitch value of the preceding step.

For example, if Step 2 contains a C and Step 3 contains both a G and a Slide value of 50.0%, it will take 50% of Step 3 for the pitch to rise from C to G. If the Slide value for Step 3 is 100%, it will take all of Step 3 for the pitch to rise from C to G. The length of the Slide is not affected by Gate Length values >100%; the target pitch will be reached prior to the onset of Step 4.

One other thing to know: If Step 2 did not contain a note in the previous example, the Slide value for Step 3 would be irrelevant. There would be nothing to slide *from* in that case.



## 10.1.4. Editing a Track


To edit a single value inside a specific point in a track, click somewhere inside the value bar for that cell and then drag the value up and down.

The next two sections describe ways to edit the data for many steps very quickly.

### 10.1.4.1. Drag Cursor Across Track

It is possible to "paint" the values for a number of adjacent steps within the same track. To do so, click inside the value bar for one of the steps and drag the cursor horizontally across that track. Dragging the cursor at a downward angle within the track will enter progressively lower values, etc.


If you accidentally cross over into one of the other tracks, don't worry; as long as you're holding down the mouse button the only values that will change are those within the original track.



♪ The results when dragging the cursor across the Pitch track will be filtered by the [Scale parameter \[p.190\]](#) (Sequencer only).

### 10.1.4.2. Proportional Edit to Entire Track

Let's say, for example, that you like the way the velocity increases from Steps 1 through 16, but you want that entire crescendo to end at the maximum value of 127. To do this, press Shift on your computer keyboard and then click the value bar for one of the steps inside that track (preferably the 'hottest' one, for this example). While still holding the cursor down, drag upward until the note with the highest velocity reaches the top of its value bar. This will perform a proportional edit to the entire track at once, raising the velocity values of every note in the track.



♪ Be sure that you click one of the value bars in the row *after* holding the Shift button. If you click a value bar first and then press the Shift button you will only edit on the value of the step on which you clicked.

On the Pitch track, the proportional edit will conform to the [Scale parameter selection \[p.190\]](#) (Sequencer only).

## 10.1.5. Random / Reset column

As if you weren't having enough fun already, there's an entire column of boxes that contains more fun than a barrel of monkeys and their typewriters. Let's take a look at the Random / Reset column.

### 10.1.5.1. Random / Reset common features

The first thing the tracks have in common is their ability to generate random data within the boundaries you set. In addition to the per-track controls, you can pre-configure the randomization to happen for all tracks at a certain time within a bar, at the bar boundary, or at multiples of the bar boundary. Plus you can click the Randomize Regen button and scramble the data instantly, at any time. Talk about random!

#### Reset track

To start a track from a "plain vanilla" state, click its Reset button. The value bars for every step in that track will be reset to their defaults.

#### Set Randomize amount

Each track has an adjustable Randomize setting, with values ranging from 0.00% (do not randomize) to 100% (full-range randomization). Click and drag inside the dice (or the arrows next to them) to set the amount of randomization you will allow to happen.

If a track ends up with random data values that you want to keep, click the Apply button located in the Randomize section.

Remember that you can use the Control key or right-click for finer adjustment of the Randomize amounts. It's like having dice with 1000 sides for each track; every time you roll the dice, you might get any one of a sexnonagintillion combinations (that's a 1 followed by 96 zeros.) That's more than the number of visible particles in the universe, dark matter aside.

Well actually, that's the number for the Sequencer. The Arpeggiator has one less randomizer, so we only provide a trenonagintillion options there. If you know more than 1,000 combinations of MIDI notes, though, you could exceed the options for the Sequencer. You are The Randomizer.

### 10.1.5.2. Random / Reset: per-track features

Two of the tracks have additional features located inside their Random / Reset windows that affect the data within the tracks.

#### Pitch Track: Scale (Seq only)

The Scale menu contains 15 choices that will filter the randomization results for the Pitch track. The Scale selection will also allow only particular chromatic intervals to be selected when the [cursor is dragged across the Pitch track \[p.188\]](#), or when the [entire track is edited proportionately \[p.188\]](#).

The bottom of the menu contains a "Scale Editing" display. This display shows the notes used in the selected scale along with the corresponding weights for each note when randomly generated ("strong" weighting means notes are frequently generated where as "weak" means notes are created less often; "neutral" is in between the strong and weak settings). Note that this display is greyed out and not editable when selecting 14 of the preset scales—it simply shows notes in the scale along with their weighting. The display is only active and editable when the "Custom" scale option is selected.

At the end of this chapter there is a [chart of the scales and the notes they contain. \[p.197\]](#)

#### Pitch track: Transpose (Seq only)

The Pitch track also contains a Transpose knob that allows you to easily transpose the entire sequence by up to +/- 24 semitones. Like so many other parameters in Pigments, this knob can be modulated to provide interesting and sometimes unexpected musical results. Note that selected scales (from the Scale menu) still apply when transposing notes, meaning that the transposed notes will snap to the nearest applicable note.

#### Velocity Track: As Played


What this setting does is govern whether the velocity values contained in the Velocity track will use the exact values stored in each step, or scale them according to the velocity of the note that triggered the pattern.

For example, if all of the steps in the pattern have a velocity value of 64 and the "As Played" value is set to 0.00%, it won't matter how hard or soft you play the keys: the pattern will always play each note at a velocity of 64. However, if the trigger note for the pattern is at a velocity of 100 and the "As Played" value is set to 100%, the pattern will play each note at a velocity of 100.

Similarly, if the pattern velocities have a V shape (high to low to high velocities) and the "As Played" value is set to 0.00%, the "V" values will always be used when those steps are reached. But with an "As Played" value of 100%, the "V" will be ignored.

Intermediate values of velocity will give different results depending on incoming values, those contained by the pattern, and the number of simultaneous notes being played. It can be quite expressive and interesting as the math runs its course.

### 10.1.6. Lock Columns

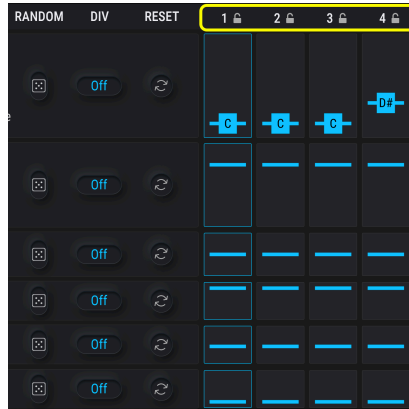

If you find the results of the randomization to be *too* chaotic, or if part of Sequence or Arpeggiation is good and you don't want it to change, you can lock that section down so that randomization will not be applied. To do this, simply click any of the lock icons above each column. When a column is locked, randomization will not be applied to any of the parameter values within that column. Note that the steps and values can still be edited when a column is locked; only randomization is prevented.

### 10.1.7. Randomize section

These two controls were designed to allow you to wreak as much havoc as you like with the pattern settings. They will scramble the data of each step in proportion to the Randomize settings for each track. So if any of those settings are at 0.00, no randomization can happen. If nothing happens when either of these controls does their thing, try raising the Randomize value for one or more of the tracks.

#### 10.1.7.1. Randomize Regen

When you want to shake things up, click the Randomize Regenerate button (Regen). This is the equivalent of "rolling the dice" to see what values will be entered by chance.

"Chance" is under your control to some extent, though. The higher the Randomize settings are for each track, the less predictable the results will be.

And if you want some tracks to stay as they are before you click the Regen button, set their Randomize values to 0.00.


### 10.1.7.2. Applying Randomized Values

If you have found something you like through random Regen, you can click the Apply button to convert the random value into the regular value of the parameter. When this is done the random value is set to 0 so that you hear exactly the same sequence before and after clicking the button.

### 10.1.7.3. Seq Auto Regen

A pattern can never be longer than 16 steps...but you can make it seem longer using the Sequencer Auto Regen setting. The selection you make here will delay randomization for up to 8 bars, after which the data in the tracks can change anywhere from a little to a lot.

Randomization can also happen as often as twice in one bar by selecting an Auto Regen setting of 1/2 bar. Whichever setting you choose, once the Auto Regen boundary has been reached the tracks will be randomized according to their Randomize settings.

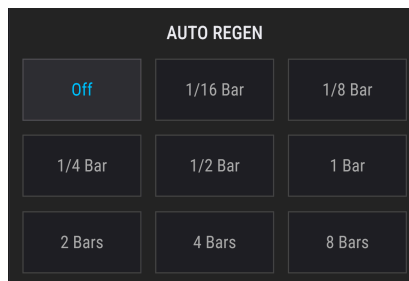

*Auto Regen rhythmic options*

### 10.1.8. Rate Section: Sync, Swing, and Hold

Patterns can freerun, or they can be synchronized to your DAW by using one of the Sync settings. The options are BPM (freerun), Sync binary, Sync triplets, and Sync dotted.

BPM stands for "beats per minute", and when this option is used the tempo can be set to any value between 30 and 300 BPM.

Each of the Sync options have distinct values that range between 1/2 note and 1/64th note durations. The triplet options are shown with a 't' in the value window near the knob (1/2.t, 1/4.t, etc.) and the dotted options are shown with a 'd' (1/2.d, 1/4.d, etc.).

#### 10.1.8.1. Swing Percentage

If a pattern seems too "stiff" or mechanical, try increasing the Swing percentage. This parameter can gradually change a pattern from straight eighth notes (50%) to a pure triplet feel (66.7%) to a dotted eighth/sixteenth note pair (75%), with every possible level of "shuffle feel" between those values.

If you've studied music theory, you'll recognize the two extremes instantly. If you haven't, you'll still *feel* them! Here's what they look like in music notation:

50% swing



75% swing



The Swing can be adjusted in 1/10th of a percent from 50.0 all the way through to 75.0%. Pigments is a precision groove machine.

#### 10.1.8.2. Modulation of the Arp/Seq Rate

Hover over the Rate control and notice the blue "+" icon. Click once on the "+" and every modulation source that can affect the Seq/Arp Rate is shown (which could be any or all of them). The slider can be used to activate a mod route, set its amount, and adjust the amount of any pre-existing modulation routes.

Follow this link to learn how to [set up modulation routes \[p.202\]](#).

## 10.1.9. Polyrhythm Mode

This feature is an interesting way to generate melodic and rhythmic combinations you might never have considered otherwise.


### 10.1.9.1. What is Polyrhythm mode?

Usually all of the tracks within a pattern will be the same length (9 steps, 16 steps, etc.). When this is the case, if a Slide only happens once in a pattern it must wait until the pattern loops before it happens again.


But with the PolyRhythm feature you can specify a different time signature for each data track! This could mean you'd have as many as six tracks of different lengths all happening at the same time. The interactions of the various parameters could become even more interesting that way.

### 10.1.9.2. The PolyR button

Click the PolyR button to activate or deactivate PolyRhythm mode. When it is active the button is outlined in blue, and when it is not active the button is grey.

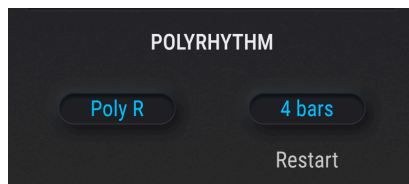

There are other visual cues, too. When PolyRhythm mode is not active, the track boundaries are represented by a single grey line. But when you click the PolyR button the first time, that single grey line will become segmented. This indicates that the track lengths are now independent. This means you can grab any one of the track boundaries and set its length.

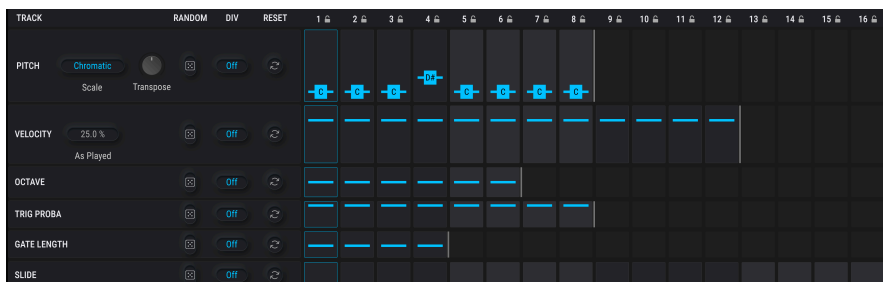

Another thing that happens when the PolyR button is toggled and if the lengths are different for one or more tracks, is that the tracks will change to their assigned lengths, then all to the same length, then back to different lengths, etc.



The length of the Pitch track determines the pattern length when polyrhythm is disabled.


### 10.1.9.3. Realign

The lengths you choose for each track can loop that way *ad infinitum*. But you can also instruct the tracks to reset to their beginnings (i.e., realign) after a certain amount of time if you like. The options are 1/2 bar, 1 bar, 2 bars, 4 bars, or 8 bars.

### 10.1.10. MIDI Output

Pigments includes a MIDI Output so that any of the patterns generated by the Seq/Arp sections can be sent to control any other virtual instrument. This can open up a lot of interesting options for sound design or to breathe life into old virtual instruments.

## 10.2. Arpeggiator (Arp)


 The Octave, Velocity, Trig Probability, Gate Length, and Slide track features are shared by the Arpeggiator and the Sequencer, and have been described [at the beginning of this chapter \[p.184\]](#). The same is true of the [Randomize \[p.191\]](#), [Rate \[p.193\]](#), and [Polyrhythm \[p.194\]](#) features. The focus of this section will be the features that are unique to the Arpeggiator.

An arpeggio is basically an outline of a chord; rather than hearing all of the notes at once, they are delivered at different times. Many great pieces of music have arpeggios at their core, from Bach's *Prelude 1 in C Major* to Eddie Van Halen's hammer-on segment in *Eruption*.

In some ways an arpeggiator is more improvisational than a step sequencer, because you can decide on the spur of the moment to change which notes the arpeggio will produce by changing which notes you are holding, and how many. If only one note is held it will be repeated; when more notes are held the arpeggiator will alternate between them. The creative possibilities are endless.

### 10.2.1. Arp Modes

When Arp mode is selected the Sequencer Pitch track is hidden, along with its Random / Reset window. In its place a drop-down menu allows you to make a selection from six different response patterns for the arpeggiator.

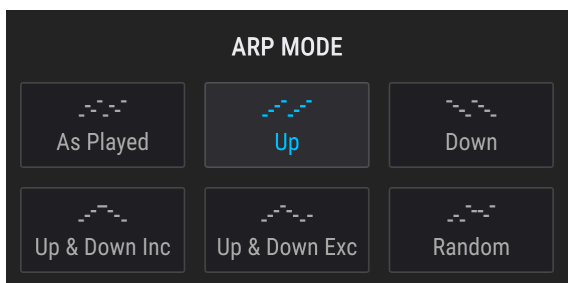

*Arp Mode menu*



From left to right the options are:

Mode	Description
As Played	Held notes will be arpeggiated in the same order they were played.
Up	Notes are played back in ascending order. New notes are inserted into the arpeggio as they are played.
Down	Notes are played back in descending order. New notes are inserted into the arpeggio as they are played.
Up & Down Inclusive	Held notes are played back in ascending order and then descending order. The highest and lowest notes are triggered twice and then the direction is reversed.
Up & Down Exclusive	Held notes are played back in ascending order and then descending order. The highest and lowest notes are triggered only once and then the direction is reversed.
Random	Held notes are played back in random order.

## 10.2.2. Chord Arpeggiation

There's a form of Chord arpeggiation at your disposal when the [Unison Chord mode \[p.73\]](#) has been activated for one or both Engines. Similar to the monophonic behavior, when a single note is held the chord will be repeated; when two or more notes are held the arpeggiator will alternate between different transpositions of the same chord.

## 10.3. Sequencer [Seq]



♪ The Octave, Velocity, Trig Probability, Gate Length, and Slide track features are shared by the Arpeggiator and the Sequencer, and have been described [at the beginning of this chapter \[p.184\]](#). The same is true of the [Randomize \[p.191\]](#), [Rate](#), and [Polyrhythm \[p.194\]](#) features. The focus of this section will be the features that are unique to the Sequencer.

### 10.3.1. Pitch

#### 10.3.1.1. Pitch track: the Random / Reset window


The capabilities of the Random / Reset windows for each track are described [here \[p.189\]](#). The randomization results for the Pitch track are further shaped by the selection of a Scale (read the next section).



♪ When Arp is selected the Pitch track and its Random / Reset window are hidden.

### 10.3.1.2. The Scale Menu

The Pitch track values conform to the 12 tones in the chromatic scale by default. But the results of the various editing and randomization features can be shaped by selecting one of the following scales in the Scale menu.

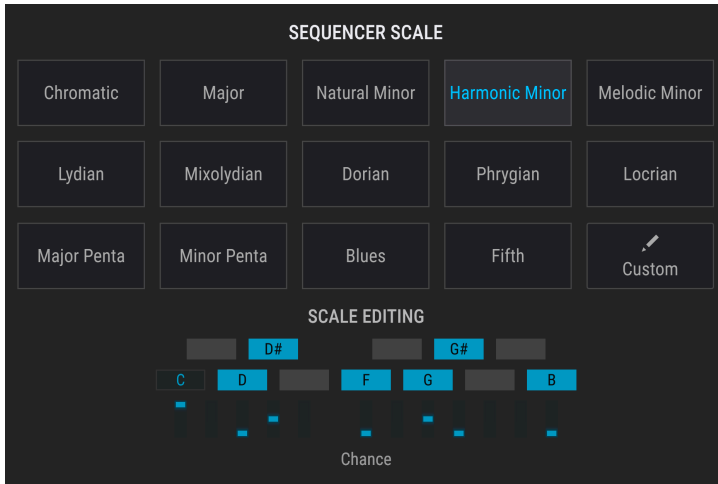

*Arp Mode menu*

Scale	Pitch results
Chromatic	0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11
Major	0, 2, 4, 5, 7, 9, 11
Natural Minor	0, 2, 3, 5, 7, 8, 10
Harmonic Minor	0, 2, 3, 5, 7, 8, 11
Melodic Minor	0, 2, 3, 5, 7, 9, 11
Dorian	0, 2, 3, 5, 7, 9, 10
Phrygian	0, 1, 3, 4, 5, 7, 8, 10
Lydian	0, 2, 4, 6, 7, 9, 11
Mixolydian	0, 2, 4, 5, 7, 9, 10
Locrian	0, 1, 3, 5, 6, 8, 10
Major Pentatonic	0, 2, 4, 7, 9
Minor Pentatonic	0, 3, 5, 7, 10
Blues	0, 3, 5, 6, 7, 10
Fifth	0, 5
Custom	User's Choice

## 11. SOUND DESIGN TIPS

Sound Design Tips is a new feature by Arturia that makes its debut in Pigments. It is intended to function both as an aid for non-expert synth users and as a time-saver for experts. It does this by indicating the controls and parameter ranges the sound designer enjoyed most while creating the selected preset.

Our hope is that the Sound Design Tips feature will facilitate your experience with Pigments in one of two ways:

- Relative newcomers could learn synthesis faster through a diminished fear of "messing up the sound" of the presets when adjusting the controls.
- More experienced users will be able to zero in on the controls that provide the quickest and best results. (Pigments does have quite a few parameters available! Hundreds, actually.)

Whether novice, expert, or something in-between, anyone can use Sound Design Tips for their own presets in the same way our sound designers have. Whenever you find inspiration in a particular set of controls, you can leave the virtual equivalent of a Post-It note to yourself by highlighting those parameters and ranges that inspire you most. This is handled through an option in the Sound Design Tips menu called [Edit Tips \[p.200\]](#), which is detailed later in this chapter.

### 11.1. Using Sound Design Tips

You may have noticed a light bulb icon in the upper tool bar:




That light bulb is actually a button that activates the Sound Design Tips feature.

There are two levels of Sound Design Tips, accessed via a pop-up menu seen when you click the light bulb.

When you choose to enable the [Advanced \[p.200\]](#) tips, the light bulb icon is filled in yellow (dark mode), or purple (light mode).

## 11.2. Information Display



Hover over the light bulb, and the Modulation Overview area changes into an information display like the one shown above.

In the rest of the Pigments interface, other light bulb icons will appear next to the controls the designer of that Preset thought were good for tweaking.

You can also use the drop-down menu to toggle Sound Design Tips on and off, but there are a couple of options in that menu so we'll cover that [in a later section \[p.200\]](#).

### 11.2.1. The Visual Cues


When the Sound Design Tips feature is active (i.e., the bulb is lit), the area around any controls for which a range was set will be surrounded by a thin yellow outline. A portion of the mod ring around the control will be outlined in yellow also.



The yellow outline does not always completely surround the mod ring. The point of it is to show the minimum and maximum values that are considered the best for that control in the context of that Preset. Sometimes, that may be only a portion of the control's full range.

### 11.3. Advanced Edit Tips

There's an arrow pointing downward on the right side of the light bulb in the upper tool bar. This arrow will open the Sound Design Tips menu.

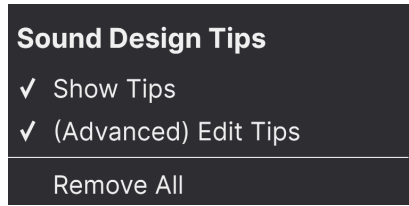


There are two options: Show Tips and (Advanced) Edit Tips. A check mark next to one of both options indicates which of those selections are active.

- **Show Tips** is the setting that toggles when the light bulb button is clicked. If the check mark is removed, the light bulb goes dark, and vice versa.
- **(Advanced) Edit Tips** is the one that allows you to add, adjust, and remove Sound Design Tips for individual controls.

The third option, **Remove All**, will do exactly what it says: it will remove all Sound Design Tips from the current preset. A confirmation window will ask you if that's what you really want to do, so there's little danger of doing it accidentally.

When (Advanced) Edit Tips is enabled there will be a few changes in every area affected by the Sound Design Tips feature. The first is that a gear symbol will appear next to the Sound Design Tips button in the upper tool bar.

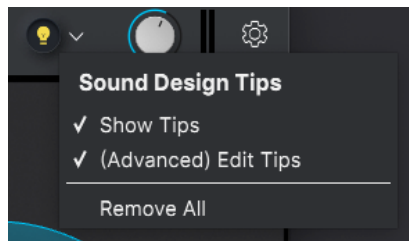

The gear symbol lets you know at a glance that it is possible to edit existing Sound Design Tips and add new ones.

When Edit Tips is active there are two other changes next to each control with an active Sound Design Tip. As you can see, in addition to the yellow outline around the control area a smaller yellow light bulb has appeared near the control.



The small light bulb serves two purposes:

- It's a button that toggles the Sound Design Tips feature for that control
- It's also a visual aid that helps locate controls with an active Sound Design Tip. In addition to the controls you can see, they will also appear on the tabs of a hidden Engine or Mod Source group, or the button of a modulation route in the center strip, to indicate an active Sound Design Tip in that location.

There are also two yellow markers that have appeared inside or around the mod ring of the control. These markers indicate the minimum and maximum limits of the optimal range.

If you decide you prefer a different minimum/maximum range for the control, the markers can be moved by [editing the Sound Design Tips settings \[p.201\]](#).

### 11.3.1. Add/Remove Sound Design Tips

When the Sound Design Tips feature is enabled you may sometimes see a slightly dimmer bulb when the cursor hovers over a control that doesn't currently have an active Sound Design Tip.



Click the dimmer bulb and then a Sound Design Tip range can be added to this control as well.

### 11.3.2. Editing Sound Design Tips

Once the Sound Design Tips feature is active for a control, **left click** on its mod ring and drag the marker to set the maximum value. Likewise, **right click** on the mod ring to set the minimum value. The center of the knob still controls the parameter, so you can verify the ideal range limits while setting them.



Be sure to leave the smaller light bulb lit if you want the optimal range to be visible when Sound Design Tips feature is active.

## 12. MODULATION ROUTINGS

The power, flexibility, and variety of the modulation features in Pigments are nearly limitless. The entire lower half of the instrument is dedicated to the modulation assignments and [sources \[p.223\]](#), which allows you to personalize your presets until they are perfect for your project.

And yet for all this power, once you have learned a few of the main concepts behind the design you will see that the modulation sections are actually very easy to use. A simple tweak here or there could inspire an entirely new project!

Pigments offers three [methods \[p.207\]](#) of assigning and editing modulations to accommodate your most intuitive way of working. As of Pigments 4, a new method is the simplest yet: [drag and drop \[p.207\]](#). First, let's cover some modulation basics.

### 12.1. Understanding the Modulation Section

The modulation section of Pigments is basically a software "patch bay" that enables you to route one or more sources to one or more destinations. 24 different sources are available, each of which can be routed to as many destinations in the Synth or FX tabs as you like.

Some of the modulation sources are hardware controls (Velocity, Aftertouch, the Modulation Wheel, MIDI note number); some are linked to traditional synth parameters (LFOs, Envelopes); some are complex (Functions); some are unpredictable (the Random generators); and some are combinations of all of the above (Macros, Combine).

Each modulation route has its own SideChain modulator available as well, which opens up additional avenues of precision and control.


#### 12.1.1. Center Strip: Three Views

The center strip of Pigments has three different appearances depending on the task you select: the [Modulation overview \[p.32\]](#), the [Mod source view \[p.203\]](#), or the [Mod target view \[p.204\]](#).

##### 12.1.1.1. The Modulation Overview

This is how the center strip will look most of the time. The other two views are visible only when specific edits are being made to the modulation routes.

Modulation sources are located in a single strip across the middle of the window. This strip provides an overview of the various modulation routes:



The Modulation overview windows always show the modulation activity for each source while it is happening. If it's an LFO, for example, you'll see a moving outline of the LFO waveform; trigger an envelope, and its shape will be traced in the appropriate window.

If the source is stationary like the Mod wheel or Aftertouch, you will see the level graphic rise and fall as the value is changed. And if the window has a grey line at its bottom or middle, that source is not being used in a modulation route.

### 12.1.1.2. The Mod Source View

Hover over a control and notice the small "+" icon that appears.



Click that "+" icon and the center strip will display the Mod Source view.

VELO	AT	MW	KBD	EXP	ENV VCA	ENV 2	ENV 3	LFO 1	LFO 2	LFO 3	FUNC 1	FUNC 2	FUNC 3	RAND 1	RAND 2	RAND 3	COMB 1	COMB 2	COMB 3	M 1	M 2	M 3	M 4	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	X

This view reveals every possible mod source for that parameter, each with an amount and a slider. Since no mod routes are active yet for the selected destination control, all amounts are zero and all slider caps are grey. The sliders can be used to adjust existing mod amounts or to activate new modulation routes, at which point they will gain a color that is related to their Mod source group.

When a slider is moved away from the center position, one of the following appears below the slider:

- **Sidechain:** click this to add a [SideChain \[p.218\]](#), a second mod source to enhance the selected source
- The name of an existing SideChain and its level. Click either field to change its setting.

To exit the Mod source view, click an empty area outside the center strip, the X at the far right, or use the Escape key on your keyboard.

For more information about using the Mod source view, click [here \[p.209\]](#).



### 12.1.1.3. The Mod Target View


For detailed editing of a modulation route, click the name of the modulation source in the Modulation overview window. (The name will briefly change to “Assign” as you hover over it.) You can also click these names from inside the Mod source view.



The middle strip will become a brightly outlined bar containing the details about each mod routing, including the destination, any existing sidechains, and how much of each has been enabled.

Notice that all 24 of the mod target colors are still visible along the top and the currently selected one is filled in with solid color. You can quickly switch to another mod target by clicking on its thin, colorful box along the top.

Clicking the arrow next to the modulator thumbnail brings up a number of very useful options:

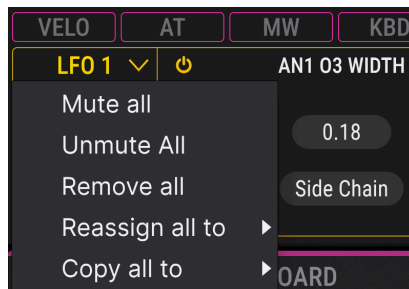

- **Mute All** immediately switches off (mutes) all of the modulation targets currently being displayed
- **Unmute All** un-mutes any modulation targets that are currently switched off
- **Remove All** clears all of the modulation targets that are currently displayed
- **Reassign All To** moves all of the currently displayed targets to any of the available modulation pages

To exit the Mod target view, click an empty area outside the center strip, the X at far right, or use the Escape key on your computer keyboard.

For more information about using the Mod target view, click [here \[p.211\]](#). For information about sidechains, click [here \[p.218\]](#).

## 12.1.2. Visual Cues

Pigments makes it easy to see what sources are modulating what destinations at any time. And, since we're French and therefore love fashion, we've color-coordinated types of modulation sources so that matching colors show up on their destinations.

Mod Source Group	Modulation Sources	Color
MIDI	Virtual keyboard, Mod wheel, Expression pedal	Pink
Envelopes	Envelopes 1, 2, and 3	Orange
LFO	LFOs 1, 2, and 3	Amber
Functions	Functions 1, 2, and 3	Green
Random	Turing, Sample & Hold, and Binary value generators	Purple
Combine	Combinates 1, 2 and 3	Magenta
Macros	Macro knobs 1, 2, 3, and 4	Light Blue

Here are some ways to discover assigned modulation destinations.

### 12.1.2.1. Hover Over a Source

Hover over any source in the Modulation Overview, and three things happen:



*LFO2 is shown modulating the pulse width of oscillator 3 in Engine 2, and that there are destinations in Engine 1. A dot also appears next to the Synth page button.*

- A collar (“mod ring”) in the source color appears around any assigned destination control, showing the modulation range relative to that control’s base setting.
- Dots in the same color appear on any Engine tabs in which one or more controls have destinations for that source, letting you know if something you can’t see at the moment is being modulated.
- Dots also do this for the main page buttons (Synth, FX, Seq) in the Upper Toolbar.

### 12.1.2.2. Hover Over a Destination

Likewise, you can hover over a destination, and little knobs appear below that control, matching the colors of the source groups that are modulating it. Here, we see that Filter 1's cutoff is being modulated by a Function (green) and a Macro (blue). (These pie-like knobs are active controls that adjust modulation amounts, which we'll learn more about in [Modulation Quick Edit \[p.216\]](#).)

*Filter 1 cutoff is shown to  
be modulated by a  
Function and a Macro*

But *which* Function and Macro in each group? Those are highlighted in the Modulation overview:



We can see it's Function 1 and Macro 1. Hovering over a "pie chart" will highlight its source exclusively. But there's still a little more going on here. Randomizer 1 is also showing up. Look again at the "pie charts" below the destination control:

*The purple segment  
indicates something in  
Function 1 is modulated  
by Randomizer 1*

See that tiny arc of purple riding on the green circle? That's another mod ring – it shows that something in the Function is being modulated by a Randomizer. Like with many sophisticated synths, modulation sources in Pigments can be destinations of other sources at the same time. But let's not get ahead of ourselves.

## 12.2. Working with Modulations


There are three ways to create a modulation routing, and the one you should choose depends on what you want to do.

- If you tend to think in terms of “source to destination,” the most intuitive and direct method is [Drag and Drop \[p.207\]](#).
- To assign several sources to the same destination, use the [Mod Source view \[p.209\]](#).
- To assign the same destination to several sources, and/or to set up sidechains, use the [Mod Target view \[p.211\]](#).

### 12.2.1. Method 1: Drag and Drop

As of version 4, Pigments supports simple drag-and drop creation of modulation routings. In this example, we will assign LFO1 (which starts out unassigned) to the Pulse Width of Oscillator 2 of the Analog Engine.

1. Click into LFO1’s box in the Modulation Overview, then hover over the name at the top. It will change to “Assign.”

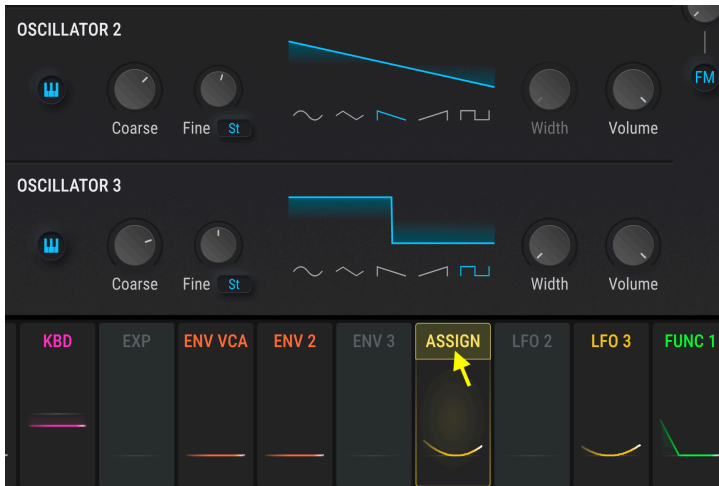

2. Click and hold on “Assign,” then drag LFO 1 to the desired destination control. You will see a mod ring appear around the control and the quick-edit “pie chart” below.



3. Release the mouse button. The assignment is made. The quick-edit knob will remain visible until you mouse away from the control.




## 12.2.2. Method 2: Mod Source View

This method uses sliders to accomplish two purposes at the same time: they can adjust the levels of existing mod routes and also create new mod routes by simply moving a slider. This allows you to try multiple combinations of mod sources and quickly assess how their combined influences affect a single parameter.

### 12.2.2.1. Selecting a Parameter

To access the Mod source view for a certain parameter, hover over that control (you may have to click first).



Click the "+" and you will be taken into the Mod source view.

### 12.2.2.2. Adding/Editing a Mod

Once you are inside the Mod source view, the sources in the Modulation Overview will display value sliders. Each of these sliders is bipolar and can be set to a value between -1.00 and 1.00 in increments of 0.01, which covers the entire available modulation range.

ENV 2	ENV 3	LFO 1	LFO 2	LFO 3	FUNC 1	FUNC 2	FUNC 3
0.17	0.33	0.59	-0.60	0.00	0.57	-0.35	0.00
Sidechain	Sidechain	Sidechain	Sidechain		Sidechain	Sidechain	

When the values are at zero the Mod source boxes are grey. As the values move away from zero the windows gain the [color \[p.199\]](#) of their modulation source type. "Sidechain" at the bottom means a [Sidechain \[p.218\]](#) can be added; if one exists, its name and level appear. Click one of those fields to change its setting.

### 12.2.2.3. Removing a Mod


There are several ways to remove a mod within the Mod source view. One way is to double-click the fader in the center strip area. The modulation value will be reset to zero and the corresponding Mod source window will become black again.

The other two methods will open a list of Modulators for the selected parameter that looks like this:

To open this list, hover over the control and do one of the following things:

- Right-click on the small " + " icon that appears near the control
- Right-click on the name of the control, or anywhere inside the control area

Once you see the list, left-click on the Modulator you would like to remove from the list. If you want to eliminate all of the mod routes for this control at the same time, click *Remove All*. You can also *Mute All* to stop the modulations without removing the routings.



Opening the list of Modulators with a right-click will also open the Mod Source view in the center strip area.

### 12.2.2.4. Exit the Mod Source View

There are several ways to exit the Mod source view. Depending on where you want to go next, you can

- click the " + " icon that got you there in the first place
- click anywhere else outside the Mod source view
- press the Escape key on your computer keyboard
- click the name of any Mod source in the center area.


The last option will take you to the Mod target view, which is handy if you want to set up a SideChain for one of the modulation routes you were editing.

### 12.2.3. Method 3: Mod Target View

This method allows greater precision over the impact a single modulation source will have on multiple destinations.


#### 12.2.3.1. Selecting a Source

When you'd like to create a modulation route by using the Mod target view, the first thing to do is to select a source by clicking on its name in the Modulation overview.

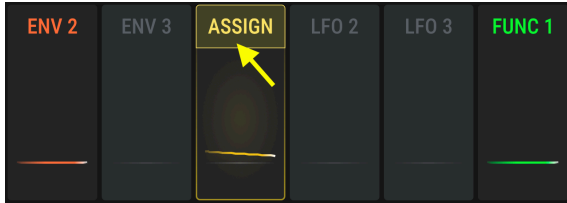

Once the Mod source is selected, two major visual changes happen:

- An information display replaces the Modulation overview window. It will list any existing mod routes, their sidechains, and their amounts. The list will grow to the right as new mod routes are added.



- The mod rings around the controls reveal the destinations and modulation amounts related to that source, in the corresponding color.





In fact, knob controls offer many visual cues as to their modulation status, which are covered in detail in the section on [knob states \[p.219\]](#) towards the end of this chapter. The most obvious indicator, though, is the colors of the mod rings. If their color matches the color of the outlines when you're in Mod Target view, then they are being modulated by one or more sources you selected.



Some target destinations might be located on the FX tab or Seq tab, but they will be listed in the Mod target view window. You can switch freely between the Synth, FX, and Seq tabs to set up additional Mod routes without leaving the Mod target view.

After a mod source has been selected you can do two things with the controls outside the Mod Target view window:

- Click and drag the center of a knob to change the value of the parameter itself.
- Edit the amount of modulation you want to apply to the parameter using the mod ring.

### 12.2.3.2. Adding and Editing Targets

When in Mod Target view, locate the parameter you want the Mod source to modulate and then hover on its mod ring. A thin line will appear around the knob with a color that matches the outline around the Mod target view area. Also, the cursor will become an up/down arrow to show you which direction to move the cursor as you edit the value.

Next, click the mod ring and drag up or down until you have achieved the desired amount of modulation. As the amount is increased a thicker line will appear, with a starting point that matches the setting of the parameter control. This line indicates the modulation range that is being applied to the parameter.

The way the modulation range is represented will be different depending on the nature of the Mod source. If the Mod source moves only positively or negatively, like Aftertouch or an Envelope, that is called a *unipolar* modulation source. In this case the modulation range will grow in only one direction from the setting of the parameter control.




*An LFO  
being  
used as a  
unipolar  
mod*

But if the Mod source moves both positively *and* negatively, that is called a *bipolar* modulation source. In this case the modulation range will grow in both directions from the setting of the parameter control.



*An LFO  
being  
used as a  
bipolar  
mod*

 Some modulation sources in Pigments, such as LFOs and Functions, can be set as unipolar or bipolar. To learn how to do this for a specific source, search for its name in the [Modulation Sources \[p.223\]](#) chapter.

You can keep adding routings using this method, with no limit on the number, until the desired result has been achieved.


However, when the number of mod routes becomes too long to view them all at one time, you can use the grey scroll bar at the bottom of the Mod target view to access the other mod routes, like so:



### 12.2.3.3. Reassigning Sources

A source may be reassigned using the drop-down menu carat next to its name in Mod Target View.

**i** By “reassign,” we mean that the job of modulating the current destination(s) is handed off to a new source, *not* that the current source is assigned to a new destination.

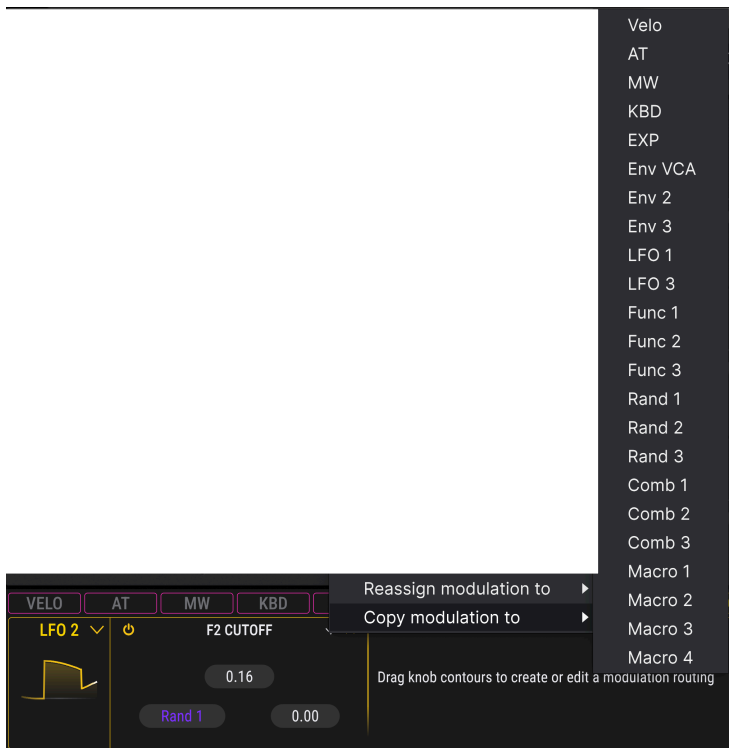

Two operations are available:

- **Reassign modulation to:** This selects a new source for the destination and disconnects the current source from its destination.
- **Copy modulation to:** As above, but does not disconnect the current source; two sources will now be modulating the same destination.

#### 12.2.3.4. Muting a Mod Route

It's possible to "mute" a modulation route inside the Mod target view without deleting it; just click the on/off button next to the amount.



♪ Muting and unmuting modulations is very handy if you'd like to work on some other aspect of a sound you're designing, without the distraction of say, the filter constantly sweeping.

#### 12.2.3.5. Removing a Mod Target

There are several ways to remove the effect a modulation route is having on a target parameter.

To neutralize the mod route but still keep it inside the Mod target view, do one of two things:

- Double-click inside the modulation ring and the mod value will reset to zero.
- Click inside the modulation ring and drag the amount down to zero manually.


To completely remove the mod from within the Mod target view, click the 'X' that is visible to the right of the SideChain.

#### 12.2.3.6. Exit the Mod Target View

To exit the Mod target view, click an empty area outside the center strip. You can also use the Escape key on your computer keyboard.

## 12.2.4. Modulation Quick Edit

As of Pigments 4, Modulation Quick Edit makes adjusting modulation amounts for an already-assigned destination much easier, mainly because you do not have to go into the Modulation Source or Target views to do so. Under certain conditions, mini knobs or “pie charts” as we call them, appear underneath a control. You might see just one ...

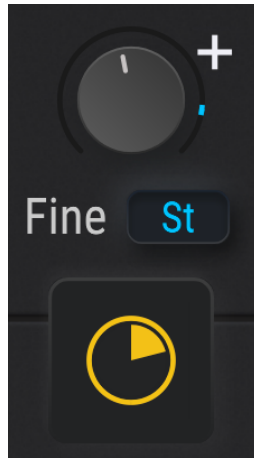

... or you might see many, depending on how many sources are modulating that destination.



When will you see these?

- When hovering over a destination control (that has active modulation sources) *and* not already being in Mod Source or Target views.
- When using [drag and drop \[p.207\]](#).

The colors correspond to the modulation source types.

Hovering over one of these little discs highlights the specific source in the Modulation Overview. Hovering also displays a pop-up showing the modulation source name and value:



You can drag inside a disc to adjust the modulation depth. This works with both unipolar and bipolar sources.

## 12.2.5. Side Chains


The Pigments modulation section has an innovative option that can be applied to modulation routings: *sidechains*.

Most people who've worked with mixing consoles or DAWs are familiar with sidechains. In music production, a sidechain is often used to route audio as a control signal to a processor or plug-in that's processing *other* audio. A popular (cliché?) example is how EDM producers sidechain the kick drum into a compressor placed on most of the other tracks to create a breathing or pumping effect – with each kick drum hit, the compressor reduces the level of the other tracks.


In the case of modulation routings, the sidechain is a way to use a second modulation source to influence the main modulation source as it affects the destination parameter.

A simple example would be using the Mod wheel to increase the amount of an LFO that has been routed to oscillator pitch, etc. A more complex application could be to use a Randomizer source to increase the amount of an LFO at unpredictable times.

After a mod routing is created, the first thing you see in the Mod Target view is the name of the destination, the amount of the modulation, the Side Chain field, and the X used to delete the mod route.

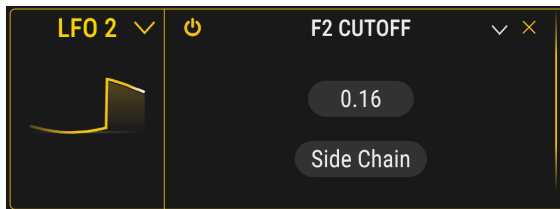


To select a source for the Side Chain, click the Side Chain field. A menu will appear.

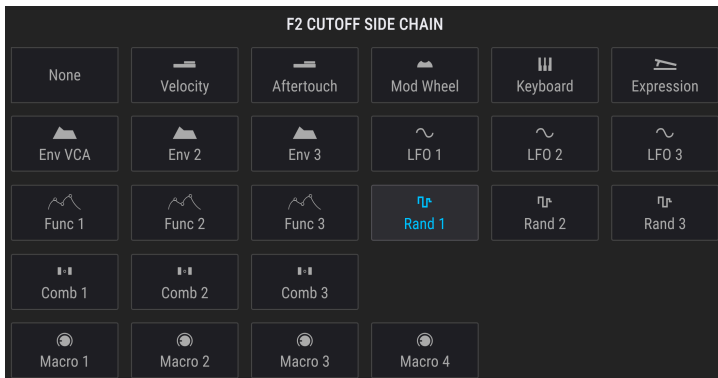

*The name of the selected mod source's primary destination appears at the top of the sidechain menu*

Once a selection is made the menu will close and an additional value field will appear to the right of the sidechain source field, like so:

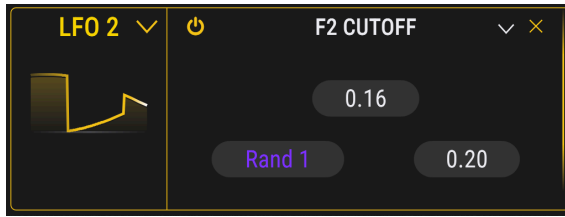

To set the value for the SideChain, click and drag the number inside the new field. Values run positively from 0.00 to 1.00. The SideChain operates within the modulation range that has been set, which means that a SideChain value of 1.00 will not exceed the maximum modulation amount you have defined for the mod route.

To mute a Side Chain, double-click its level to reset it to zero. You can save the preset that way and the SideChain selection will be preserved. To remove a Side Chain, open the Side Chain menu and select "None."

### 12.3. More on Modulation – Useful Tips

Modulation in Pigments is a deep rabbit hole indeed. Here are a few more useful items of information to speed your workflow and help avoid confusion.

#### 12.3.1. Knob States

The knobs and mod rings show different colors and graphics depending on what is being done. The graphic and table below relate what a knob looks like to what's going on.





State	Views	Source selected?	Conditions	Description
1	All	N/A	No modulation	Zero value (minimum or middle position [not pictured])
2	All	N/A	No modulation	Mod ring shows non-zero value as solid color
3	All	N/A	1 or more modulations	Thin marker (static or moving) in mod ring
4	All	N/A	Hover on knob center	Value and Quick Edit pop-ups appear
5	Mod Target	Yes	Hover on mod ring	Mod ring and mod range glow slightly
6	Mod Target	Yes	Hover on mod ring (mod = 0)	Mod ring lit by thin, glowing line in source color
7	Mod Target	Yes	Hover on target (mod ≠ 0)	Mod ring has thin line in source color; mod range = thick line (but <a href="#">see note [p.O]</a> )
8	Mod Source, Mod Target	No	Hover on source	Target mod ring glows with source color, unless...(see note [p.O])
9	Mod Overview, Mod Source	No	Hover in knob area	Shows a small "+" icon that activates Mod source view
10	Mod Source	No	Select small "+" icon	Small "+" icon is blue, knob area is outlined

### 12.3.2. Display of Modulation Ranges

There are times when the mod ring won't show a modulation range (i.e. the thicker mod ring), or perhaps not display its full range. There are three symptoms of this:

- **Mod Target view:** The Source has been selected, the modulation route is visible, and the mod ring is lit, but it is dim all the way around.
- **Modulation Overview or Mod Source view:** Hovering the cursor on the Mod source shows nothing around the target knob, even though the modulation route has a non-zero amount.
- Hovering the cursor on the target parameter knob *does* illuminate the Mod source in the center area, but not the other way around.

These symptoms have the same cause and can be easily remedied. The reason this happens is simple: a modulation route is only effective within the operational range of the target parameter. So if the parameter value is too high or too low, the result is that the modulation effect has been pushed partially or entirely out of range.

For example, if a Filter cutoff is almost all the way "open" but an LFO's positive phase is hitting it at full depth, this will happen:



The solution is to adjust the parameter value until you can see the full modulation range. You may also want to consider reducing the modulation amount, depending on the results you hope to achieve.

### 12.3.3. How Bipolar Mod Sources Affect Mod Ranges

It can be confusing at first to work with a bipolar Mod source such as an LFO. Let's work through an example using the Default preset.

1. Select the Default preset
2. Select the LFO tab from the Mod source groups
3. Note that the Engine 1 Coarse tune control has a value of 0 (it's in the 12:00 position)
4. Click the LFO 1 Mod source in the Modulation overview window
5. Hover over the Engine 1 Coarse tune control.
6. Notice that the mod ring gained a yellow outline, and the cursor became an up/down arrow.
7. Click on the mod ring and increase the modulation amount by dragging upward.
8. Notice the value of the mod inside the Mod target view window as it changes. Set it to 0.50 (50%).
9. By now the yellow ring has grown to surround the entire mod ring, and the blue marker is traveling the entire range.
10. Now increase the mod amount to 1.00 (100%) while watching the yellow ring. It will not grow larger.
11. Return the mod amount to 0.50 (50%).
12. Now turn the Engine 1 Coarse tune control fully counter-clockwise to a value of -60.
13. Notice that the upper edge of the mod range has moved to the 12:00 position.
14. Now increase the mod amount to 1.00 (100%) while watching the yellow ring.
15. As this is happening the right edge will expand to fill the available space around the mod ring.

So what just happened? Let's break it down.

- Any parameter can be modulated over its entire range.
- The range of a parameter is equivalent to a full modulation range of +/- 1.0.
- The Engine 1 Coarse tune can be tuned +/- 60 semitones.
- For now, think of the Engine 1 Coarse tune value of 0 as being at 50%, or 0.5.
- With the modulation amount at 100%, the mod range causes the LFO to swing +/- 50%, or from 0-100%.
- When the Engine 1 Coarse tune is at its minimum (-60), think of that as a value of 0%, or 0.00.
- When the Engine 1 Coarse tune is set to -60, a modulation amount of 1.00 (100%) is needed in order to modulate it from 0-100% (i.e. to the opposite extreme of +60).


## 13. MODULATION SOURCES

This chapter will describe the nature of each Modulation source. These are found in the bottom third of the Pigments user interface, each on its own tab and color-coded. See the previous chapter to learn how to set up and use the [Modulation Routings \[p.202\]](#).

### 13.1. Keyboard Tab

#### 13.1.1. The Virtual Keyboard

Here, the virtual keyboard contains a few more features than in the [Play View \[p.52\]](#).

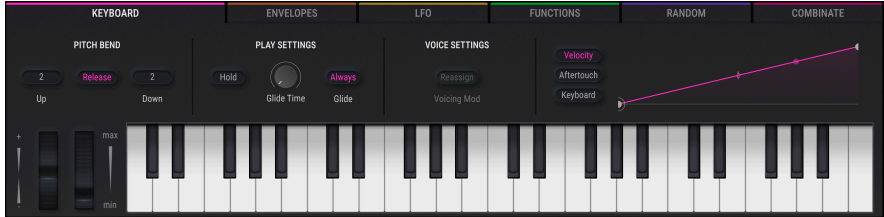


*The Pigments virtual keyboard*

The virtual keyboard is available when the MIDI tab is selected in the bottom half of the window. With it you can play a sound without the need for an external MIDI device. Simply click on a virtual key to hear the currently selected sound. You can also drag the cursor across the keys to hear a glissando.

Clicking near the front edge of the key results in a higher velocity note; clicking near the back of the key produces a soft velocity.

#### 13.1.2. Pitch and Mod Wheels



Located to the left of the virtual keyboard are the Pitch and Mod wheels. These wheels may be dragged up and down with your mouse. As you do they will perform the functions they have been assigned elsewhere in the user interface. They will also respond to the appropriate MIDI controller input.

The pitch wheel will return to zero when it is released; the modulation wheel will stay at its current location until moved.


### 13.1.3. Bend Range

The pitch bend range can be set independently for Up and Down. For example, the upward bend can be set to +2 semitones and the downward bend can be set to -36 semitones. Whammy-bar solos are now within your reach!

### 13.1.4. Release Button

If this is pressed, the release phase of envelopes for any sound will not be affected by the pitch-bend wheel.

### 13.1.5. Play Settings

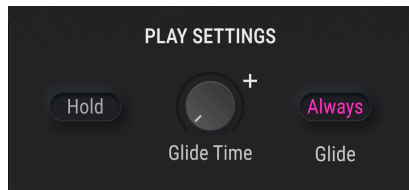

#### 13.1.5.1. Hold Button

The Hold button does the same thing that a sustain pedal does, and affects the Sequencer/Arpeggiator:

- **Sequencer mode:** Once triggered, the sequence will keep playing as long as Hold mode is active.
- **Arpeggiator mode:** As long as a MIDI note is active, pressing other keys will add new notes to the arpeggio. When all notes are released, the next ones will start a new arpeggio.

#### 13.1.5.2. Glide

Glide is also called portamento, and means that you hear a pitch sweep between notes as you play. Two parameters are relevant here.


- **Glide Time:** Sets the time it takes for one note to glide to the next, in milliseconds.
- **Always:** If this is engaged, notes always glide. If it is not, only notes played legato will glide.

To hear no glide at all regardless of the circumstances, set Glide Time to zero.

### 13.1.6. Voice Settings

- **Reassign:** When new notes are played, Pigments reassigns voices to them dynamically, as needed.
- **Rotate:** When new notes are played, Pigments rotates through voices, stealing notes in order of the least-recently played first.

### 13.1.7. Keyboard Curves Section

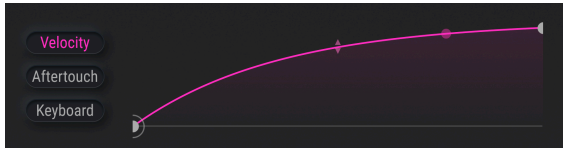

Pigments can set independent curves for three different performance gestures:

- **Velo:** Velocity curve
- **Aftertouch:** Aftertouch
- **Keyboard:** Keyboard

The first two allow you to match the response of the input keyboard to your playing style; the third provides a mod source that tracks the keyboard from left to right. All three are part of the Keyboard mod source group on the left side of the Modulation Overview.

The first and last points of these curves can't be moved left or right, but you can drag them up or down to invert the curves if you like. You can also add up to two points anywhere in the middle by clicking, then adjust the curves between all four points by dragging the up/down arrows. Any sort of curve can be achieved, from exponential to linear to logarithmic.

To remove a curve breakpoint, right-click on it.

## 13.2. Envelopes Tab



### 13.2.1. Env 1: Hardwired to VCA

Envelope 1 always controls the VCA but you can still use it as a source for other mod routes if you like. Gate source is fixed on Poly KBD option and can't be changed.

### 13.2.2. Envelope Parameters

With the exception of the fixed Gate Source for Envelope 1, the parameters for all three envelopes are identical. Some of the parameters on the top and bottom rows are closely related, so we'll jump around the controls a bit as we describe them.

Control	Description
Attack	Sets the amount of time it takes for the envelope to reach its peak value (1 msec to 20.0 seconds)
Att Curve	Adjusts the attack slope between -20.0 (Logarithmic) and 20.0 (Exponential); 0.00 = Linear
Decay	Sets the time it takes the envelope to decay from its peak to the sustain level (0.001-20.0 seconds)
Dec Curve	Adjusts the decay slope between -20.0 (Exponential) and 20.0 (Logarithmic); 0.00 = Linear
Release Link	Links Decay / Release times to Decay knob, and links Decay / Release curves as <a href="#">described here [p.227]</a>
Sustain	Sets the target level for the Decay value, where the envelope will rest until the note is released
Gate Source	Selects the source to trigger/retrigger the envelope (Env 2+3 only; Env 1 Gate Source is fixed)
Release	After note-off, this determines the amount of time the envelope will take to fade to zero
Release Link	Same behavior as the other link button: links Decay / Release times, curves as <a href="#">described here [p.227]</a>
ADR button	Toggles envelope mode between ADSR and ADR behavior; <a href="#">more information here [p.227]</a>



Use the Control + Click combination to fine-tune the value of a parameter. Double-click a control to reset its value to the default.

### 13.2.3. Release Link Buttons

There are two of these buttons: one by the Decay knob and another by the Release knob. What they do is link the Decay time and the Release time to the Decay knob, which controls them both. The Release is greyed out to indicate that it cannot be adjusted when the two parameters are linked.

Also, when Release Link mode is active, the Decay curve knob also adjusts the Release curve. Otherwise the Release curve is always exponential.

### 13.2.4. ADR versus ADSR

First, the terms: ADR means Attack, Decay, Release; ADSR means Attack, Decay, Sustain, Release.

When ADR mode is active, the envelope response is different from an ADSR in the following ways:

- The ADR envelope does not jump to the Release stage when the key is released; it will always move through the full Decay time unless the envelope is retriggered.
- The Sustain level is merely the transition point between the Decay and Release stages; it does not serve as a plateau where the envelope will rest while the key is engaged.



♪ All of the envelopes in Pigments are capable of audio-rate performance. This improves their precision even when assigned to a non-audio destination such as a filter cutoff.



## 13.3. LFO tab

LFO stands for Low Frequency Oscillator, which is the most common source of modulations such as vibrato and tremolo in synthesizers. Think of it as a cycling up-and-down rhythm, which can do all manner of things depending on the destination(s) it's modulating.

The parameters for all three LFOs are identical:


Parameter	Description
Waveform	Adjusts waveform: Sine->Triangle->Square->Sample & Hold
Symmetry	Phase distortion that makes the positive and negative phases of the LFO wave more or less alike
Rate	Controls the speed of the LFO, with selectable sync options
Phase	Shifts the starting point of the LFO waveform
KeyTrack/Fade/Smooth	Three very different adjustments for LFO response; <a href="#">see below [p.228]</a>
Retrig Source	Selects the <a href="#">source [p.229]</a> that will trigger/retrigger the LFO
Bipolar button	Toggles the LFO between positive-only (unipolar) and positive-and-negative (bipolar) operation.

### 13.3.1. LFO Presets

Just beneath the LFO waveform display is a horizontal offering of clickable Presets.

Click on one of the waveforms to select it for the LFO.

### 13.3.2. KeyTrack/Fade/Smooth

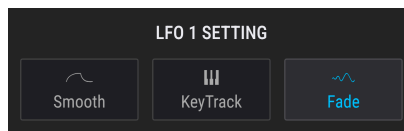


The button and pop-up menu under this knob allow you to select one of three types of adjustments to the LFO response.

Parameter	Description	Range
KeyTrack	Enables the LFO rate to increase/decrease according to MIDI note number.	+/-200%
Fade	Controls how long it takes for the LFO to reach its maximum amplitude.	.001-20.0 sec
Smooth	Allows you to flatten the peaks and soften the edges of the LFO waveform.	0-4.00 sec

### 13.3.3. LFO Retrigger Source


Clicking on this button brings up the following menu:

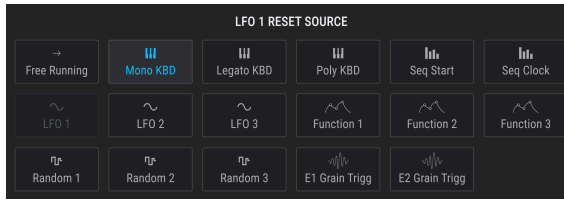

Here, you can select a source that causes the LFO to retrigger. That is, to start from the beginning of its phase.

## 13.4. Functions Tab

Pigments provides three Function generators, each of which is capable of creating very complex modulation sources. All three can be doing entirely different things at the same time. What is a function? Whatever you want it to be – kind of like an envelope and an LFO had a baby, which then got superpowers from outer space.

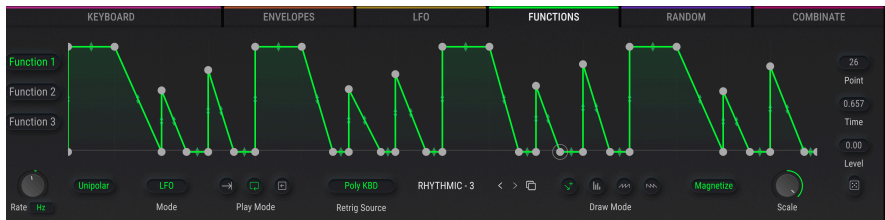

Each Function can contain up to 64 points, with independent levels and different curves between each point.

First we'll list all of the sections of the Function window and give basic details, and then we'll dive into the fun stuff of learning how to create your own Functions.

Parameter	Description	Range
Function view	This window shows all points and the curves between them	Simple to complex!
Function 1-2-3	Select one of the three Functions	Function 1-3
Rate	Choose one of four sync options, including	Hertz, Sync (all values) Straight Only, Triplets Only, Dotted Only
Bipolar	Toggle between Bipolar and Unipolar Function modes	On (Bipolar), Off (Unipolar)
Mode Selector	Sets whether function runs once (Envelope) or continuously (LFO)	LFO, Envelope
<a href="#">Play Mode [p.34]</a>	Selects whether function runs once, loops and retriggers, or loops and does not retrigger	Once, Loop, Free Run
<a href="#">Retrig Source [p.236]</a>	Set trigger/retrigger source for One or Loop Play modes	16 options; <a href="#">Run mode = None [p.O]</a>
<a href="#">Copy to [p.233]</a>	Copy settings between Functions	Fct 1-3
<a href="#">Presets [p.234]</a>	Select a factory preset or save/recall your own	(unlimited)
Draw Mode	Selects tool used to draw or edit function	Edit, Line, Ramp, Saw
Magnetize	Show/hide grid lines and "snaps" Function point to grid	On, Off
Scale	Scales the output of the Function	
<a href="#">Regen [p.191]</a>	Generate randomness within the Function	0.00 to 1.00 in steps of 0.001
Point	Select a specific point within the Function	Up to 64 points
Time	Shift the location of the selected point	(Depends on location of points)
Level	Set the amplitude of the selected point	0.00 to 1.00 in steps of 0.006

Follow the links for additional information for those items. Let's spend some time learning how to create a Function.

### 13.4.1. Adding/Removing a Point

Start with the Default preset and select the Functions tab. You should see Function 1 selected, and it should be a straight line which descends from left to right.

Now click anywhere within the Function view window. Another point will be added where you clicked. You can add up to a total of 64 points to the Function.

To **delete** a point, right-click it. To delete multiple points, click and drag with the right mouse button.

### 13.4.2. Moving a Point

To change the location of a point within a Function, click its circle and drag it. You can move it up or down to adjust its level. Drag it to the left or right to change its time within the Function. A point can not be dragged beyond the location of the points on either side.

### 13.4.3. Changing a Curve

Start with the Default preset and select the Functions tab. You should see Function 1 selected, and it should be a straight line which descends from left to right.


Now add a point somewhere in the middle of the Function view window. It needs to be far enough away from the first and last points to allow the curves to be seen.

Now drag the point to a level of about 0.300 (as viewed in the Level window on the right side). It needs to be low enough compared to the first point to recognize the changes to the curves as they happen.

Notice that between the points, in the middle of the lines that connect them, are up/down arrows. Grab one of these arrows and gradually move it all the way up. The line will warp until it reaches the top of the Function view window, at which time it will become completely squared off. This means that after the Function progresses in time from point 1 to point 2, the change in level will be instantaneous.

Likewise in the opposite direction: drag the up/down arrows down and observe a similar but inverse warping effect. When the line reaches the bottom of the Function view window it will be squared off.

#### 13.4.4. Drawing Tools

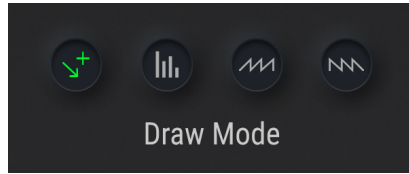

The drawing tools are located at the bottom right of the Function display and help you draw and edit functions. The buttons (from left to right) are as follows:

- **Edit** - Creates a single point
- **Draw Line** - Creates a line with two points
- **Draw Ramp** - Creates a ramp with two points
- **Draw Saw** - Creates a sawtooth (reverse ramp) with two points

When using any of the "draw" tools (line, ramp or saw), a single click will create a single segment. Click-dragging will generate a curve the length of multiple segments.


The curves between points can be adjusted by dragging on the up/down arrows at the midpoint of each line segment. However, you won't be able to adjust the curve between two points that are at exactly the same level.

The **Magnetize** button engages "snapping" to the nearest vertical line when editing points to make precise editing easier. Switch this function off if you would like to edit freely without the automatic snapping of the edit points.

To **delete** a point in the function display, simply right-click it.

#### 13.4.5. Copy Between Functions

If you have drawn a function that you would like to copy to one of the other available functions slots, the process is very easy. Simply click the double-document icon next to the Presets button:




Doing so opens a menu allowing you to duplicate the function to any of the other function slots. For example, if you're on Function 1, the buttons for Functions 2 and 3 are available. Click one and the transfer is instantaneous. You can then select the target Function to confirm the transfer.

This is a handy feature, useful for making quick backups or slight alterations between functions so as to give them complementary settings.

### 13.4.6. Working with Function Presets

Click the Presets field and a list of Function presets will open. Arturia has provided some interesting Functions that you can use or adapt as needed.

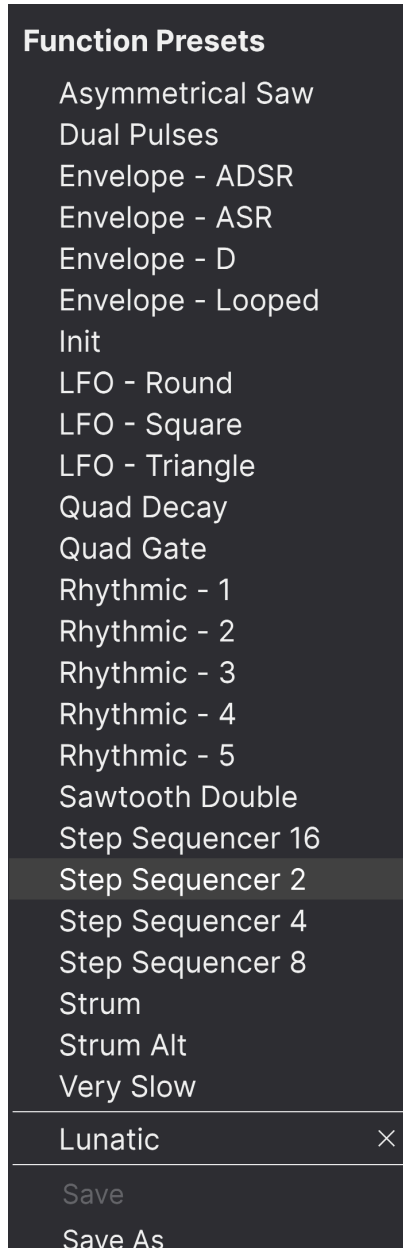

Whether you've made changes or created a new Function from scratch, you can save them as your own by selecting the Save or Save As options. You can't overwrite a factory preset, but you can alter them as much as you like and use the Save As option.

After saving a new preset it will appear in the preset list when it is opened. After that point you can use the Save option to store any changes you make to that preset, or use Save As to give the preset another name.

You can delete an original preset from the list by clicking the X across from its name.

### 13.4.7. Play Mode

Note that this mode is only visible when *LFO* is selected in the Mode drop-down menu.


Parameter	Description
One	The Function runs once when triggered. The Gate Source chooses the trigger source.
Loop	Once triggered, the Function will loop until another trigger resets it. Gate Source chooses Trigger.
Free Run	Function starts when preset is selected and loops freely, ignoring all triggers. <a href="#">See Play Mode = Run [p.O].</a>

#### 13.4.7.1. Play Mode = Free Run

When Play Mode is set to Free Run, the Retrig Source setting is forced to a value of None. This is because the Free Run setting allows the selected Function to loop freely without being reset by a trigger source. As a result a Retrig Source is not allowed, so a Retrig Source value cannot be selected.

### 13.4.8. Envelope Mode

Note that this mode is only visible when *Envelope* is selected in the Mode drop-down menu.

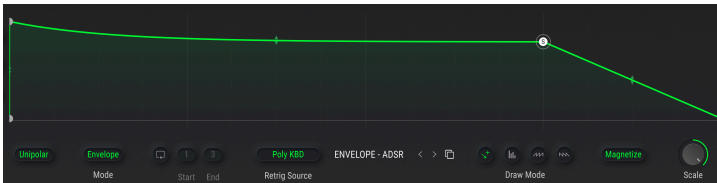


Envelope mode adds a point with the letter "S" to the Function. This is the Sustain point. When the Function is triggered by a MIDI Note On command, for example, the Function proceeds through the points in the Envelope until it reaches the Sustain point. Then:

- If Loop is off, after the note is released the Function proceeds to the end of the Envelope.
- If Loop is enabled, the Function cycles from the Start point to the End point until the note is released. Then the Function proceeds to the end of the Envelope.

The Sustain point can be dragged up or down, left or right, to any position between two points. Points can be added or removed on either side of the Sustain point, but it cannot be removed.



### 13.4.9. Retrig Source

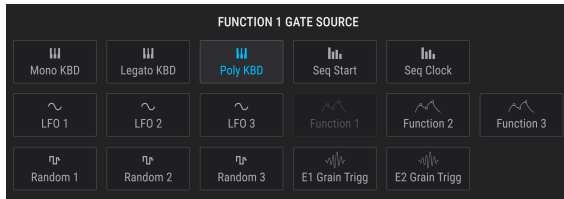

A value for Retrig Source is only available with the Play Mode is set to One or Loop. Click the name field to open a menu and make a choice. A check mark indicates the current selection.

### 13.4.10. The Dice Icon

To randomize the top peak points of your function, drag up and down on the “dice” icon. When the cursor is released, the new Function replaces the old one and the dice will be emptied.

## 13.5. Random Tab

These serve as modulation sources that generate, well, *random* output. If you want unpredictable burbling in some aspect of your sound, this is the place to go.



Randomizers 1, 2, and 3 each contain a drop-down menu letting you select one of three different randomization generators: Turing, Sample & Hold, or Binary.

### 13.5.1. Turing



Named for the British mathematician Alan Turing, who is credited for breaking codes that helped the Allies win World War II, the Turing generator produces control values that can be completely random, or locked into loops that repeat with a degree of predictability. The length of a cycle can be anywhere from one to 64 steps, depending on the combined settings of the Flip and Length parameters.

Parameter	Description	Range
Flip	The likelihood of 'mirror image' output and length	0.00-100%
Length	The length of the cycle	1-32 (1-64 if Flip = 100%)
Rate	Choose one of four sync options, including freerun (Hz)	Hertz, Binary, Triplets, Dotted
Reset Source	Choose a source that resets the Turing cycle, or leave it free-running	17 options

### What Does Flip Do?

The Flip parameter sets up the probability that a particular output will be both inverted and reversed.

As an example, let's look at the output of the Turing generator when Length = 2.

%	Length	Output 1	Output 2	Output 3	Output 4	Output 5
0.00	2	x	y	x	y	x
50.0	n/a	random (0-1)	random (0-1)	random (0-1)	random (0-1)	random (0-1)
100	2+2	0+x	0+y	1-x	1-y	0+x

And that table means ... what?

- At 0.00% the values of steps 1 and 2 alternate indefinitely.
- At 100% the values of steps 1 and 2 will be mirrored and inverted. The cycle length is doubled from 2 to 4 (vertical mirror), and the values are inverted when measured from 0 and 1 (horizontal mirror relative to 0.50).
- At 50% the values of steps 1 and 2 are completely random. The term "cycle" is used loosely, as the next two values may or may not repeat either of the previous values. The length of the cycle is difficult to discern unless you hover over the Flip control.

Flip values of 0.00% and 50% are easier to understand: complete rigidity or total fluidity. The following graphic may help visualize what happens at a Flip value of 100%.

The output of step 1 is  $(0 + 0.25) = 0.25$ , and the output of step 2 is  $(0 + 0.99) = 0.99$ ; the output of step 3 is  $(1.0 - 0.25) = 0.75$ , and the output of step 4 is  $(1.0 - 0.99) = 0.01$ .

Another way to think about it is this: Flip values of 0.00% and 100% result in cycles that are very predictable in output and length, but Flip values between 0.01% and 99.9% will result in various degrees of random output and length.

Or if you prefer, imagine a bell curve: the midpoint (50.0%) is completely random, and as you move toward either extreme the results are decreasingly random.

### 13.5.2. Sample & Hold

This term is more well known, and refers to sampling a source (such as a controller input or waveform) at time intervals, then applying that value to a modulated destination. We've incorporated some very unusual features in this random function generator!

Parameter	Description	Range
Source	Selects the impulse to provide the values that are sampled at random	27 options (see below)
Trigger	New values are sampled when triggers are received from this source	17 options
Rise	Sets the time it takes to transition into the next value	0.00-4.00 seconds
Fall	Determines the time it takes for a value to return to zero	0.00-4.00 seconds
Link	Connects the rise and fall values; Rise control adjusts both	On, Off
Rate	Choose one of four sync options, including freerun (Hz)	Hertz, Binary, Triplets, Dotted



♪ The sampled [Noise Sources \[p.132\]](#) from the [Utility Engine \[p.132\]](#) are available as impulse sources for Sample and Hold. Select *UT Noise 1* or *UT Noise 2* to use them. A sample must be loaded into the Noise source(s) for this to work.


### 13.5.3. Binary

Yes, binary means a black-and-white, all-or-nothing mathematical approach (i.e., ones and zeros). But what are the chances that you'll end up with one or the other at any given moment? That's what the Binary generator lets you do: adjust the predictability of the outcome.

Parameter	Description	Range
Proba	Adjusts the probability that the output will be 1	0.00 - 1.00 in steps of 0.001
Correl	Correl (correlation) affects the chances of two successive output values being the same. At a value of 0, only the Proba parameter is active. At a value of 1, the output at time $t+1$ is guaranteed to be exactly the same as the one at time $t$ .	0.00 - 1.00 in steps of 0.001
Rate	Choose one of four sync options, including freerun (Hz)	Hertz, Binary, Triplets, Dotted

## 13.6. Combine Tab

A Combinator generates a modulation source based on *combining* one or two other modulation sources. Pigments provides three of these mathematical marvels for use as a modulation source.

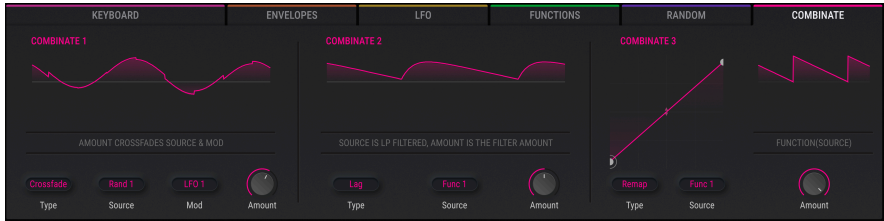

*The full Arpeggiator/Sequencer window in Sequencer mode*

The best way to understand how this works will be to provide a simple example. But first, here's a list of the parameters.

Parameter	Description	Range
Source	The parameter being affected	24 options
Mod	The parameter doing the affecting	24 options. Hidden for certain Types
Type	Decides the math process that will be applied	9 options
Amount	Controls how much the Mod affects the Source	0.00 - 1.00 in steps of 0.001

Let's try this out.

1. Start with the Default preset.
2. Select the Combine tab.
3. In Combine 1, set Source to LFO 1 (Sine) and Mod to LFO 2 (Sawtooth).
4. Type = Sum by default and the Amount is at 0.500. Set Amount to maximum (1.00).
5. On the LFO tab, change the Rate of LFO 2 to 1/4. This will make the effects more obvious.
6. Return to the Combine tab.
7. Slowly adjust the Amount from 1.00 to 0.00 and watch the waveform. Lower amounts decrease the impact of the Sawtooth wave, as seen in the smaller spikes that eventually disappear into the Sine wave.
8. Return the Amount to 1.00 and observe the waveform: the Sine peak is first, then the Sawtooth.
9. Select the next Type (Difference) and observe: now the Sawtooth peak is first, then the Sine. Mathematically the results are at opposite extremes, as are the results here.
10. Return the Amount to 1.00 and select Type: Multiply, then Type: Divide. The differences in the math processes are even more extreme, and though the results are too technical to describe, we think you'll agree that the output waveforms are equally complex and useful.
11. Select Type: Crossfade. This one's easy: with the Amount at 1.00 only the Mod input passes through, and so the result is a Sawtooth wave. At a value of 0.00 only the Source input passes through, and so the result is a Sine wave.

12. Select Type: Lag. (Notice that the Mod input is hidden.) Lag causes a "rounding" effect on the peaks and valleys of the Source input.

13. For this example, select LFO 2 as the Source. The results will be more obvious with the Sawtooth wave.

14. Adjust the Amount from 1.00 to 0.00 and back. The Sawtooth will gradually appear fully formed, and then gradually be rounded until the waveform is almost entirely squashed.

15. We'll go through the rest of the example with LFO 2 as the Source.


16. Set Amount to zero, and select Type: Threshold.

17. Notice that the lower half of the Sawtooth wave does not rise above the Threshold level.

18. Increase the Amount and observe the results as more of the Sawtooth falls below the Threshold.


19. Set Amount to zero, and select Type: Offset.

20. Adjust the Amount from 0.00 to 1.00 and observe: The lowest levels of the Sawtooth waveform are slowly offset until the entire waveform exists in positive territory, and eventually becomes a flat line at the maximum level.

 LFO 2 is actually set to a Triangle wave, but since its Symmetry setting is at minimum, the actual output is a Sawtooth wave.

### 13.6.1. Combine Types

The formulas used to calculate each Type are displayed in a pop-up menu when you click the Type button:

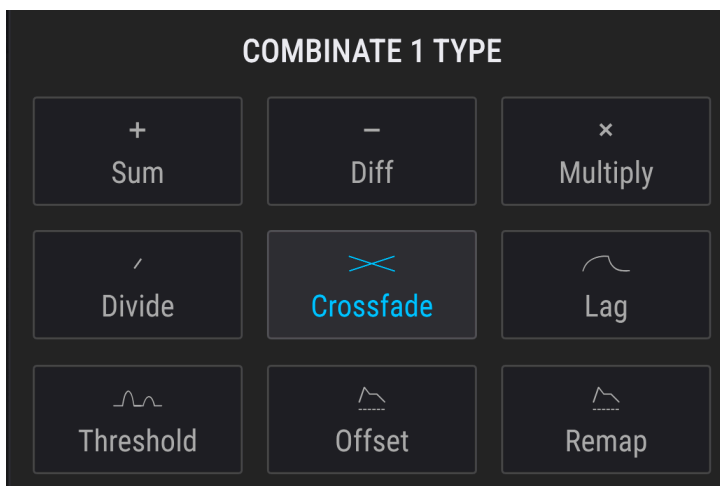

The following chart displays how each formula combines two modulation sources.

Type	Formula
Sum	Source + (Mod * Amount)
Diff	Source - (Mod * Amount)
Multiply	Source * Mod * Amount + Source * (1 - Amount)
Divide	Source / (Amount + Mod)
Crossfade	Amount crossfades Source and Mod
Lag [p.242]	Source is LP filtered; Amount is the filter amount
Threshold	Source if > threshold, otherwise = threshold
Offset	Offsets Source by Amount
Remap	Remaps source to output through a function table



The output of the equations is not allowed to exceed the values of -1.00 and +1.00.

### 13.6.2. Lag

Here are some details to keep in mind about the Lag process:

- When input is received from a source and the Amount value is 0.00, all changes of the input are instant.
- If the Amount value is 0.500 (50%) it takes 500ms to reach 99% of the source's amplitude.
- If the Amount value is 1.00 (100%) it takes 5 seconds to reach 99% of the source's amplitude.

## 13.7. Macros



Macros are four unipolar knobs that can be assigned any number of modulation routings, including sidechains.

Put more simply, a Macro lets you turn multiple knobs by turning *one* knob.

Macros work like any other modulation source, so you can set up [routings \[p.202\]](#) for them using the same procedures.

- In the Modulation overview, select M1 to choose Macro 1 as a Mod source, M2 for Macro 2, etc. Then to construct mod routes, use the [Mod target view method \[p.211\]](#). This may be the preferred method, since one of the best uses of a Macro is to control multiple parameters from a single source. You can also set up [SideChains \[p.218\]](#) for each of the mod routes while you're at it.
- When you want a Macro to be one of several Mod sources affecting a single parameter, use the [Mod source view method \[p.209\]](#).

Double-click below the Macro knob to enter a name.



## 14. SOFTWARE LICENSE AGREEMENT

In consideration of payment of the Licensee fee, which is a portion of the price you paid, Arturia, as Licensor, grants to you (hereinafter termed "Licensee") a nonexclusive right to use this copy of PIGMENTS (hereinafter the "SOFTWARE").

All intellectual property rights in the software belong to Arturia SA (hereinafter: "Arturia"). Arturia permits you only to copy, download, install and use the software in accordance with the terms and conditions of this Agreement.

The product contains product activation for protection against unlawful copying. The OEM software can be used only following registration.

Internet access is required for the activation process. The terms and conditions for use of the software by you, the end-user, appear below. By installing the software on your computer you agree to these terms and conditions. Please read the following text carefully in its entirety. If you do not approve these terms and conditions, you must not install this software. In this event give the product back to where you have purchased it (including all written material, the complete undamaged packing as well as the enclosed hardware) immediately but at the latest within 30 days in return for a refund of the purchase price.

**1. Software Ownership** Arturia shall retain full and complete title to the SOFTWARE recorded on the enclosed disks and all subsequent copies of the SOFTWARE, regardless of the media or form on or in which the original disks or copies may exist. The License is not a sale of the original SOFTWARE.

**2. Grant of License** Arturia grants you a non-exclusive license for the use of the software according to the terms and conditions of this Agreement. You may not lease, loan or sublicense the software.

The use of the software within a network is illegal where there is the possibility of a contemporaneous multiple use of the program.

You are entitled to prepare a backup copy of the software which will not be used for purposes other than storage purposes.

You shall have no further right or interest to use the software other than the limited rights as specified in this Agreement. Arturia reserves all rights not expressly granted.

**3. Activation of the Software** Arturia may use a compulsory activation of the software and a compulsory registration of the OEM software for license control to protect the software against unlawful copying. If you do not accept the terms and conditions of this Agreement, the software will not work.

In such a case the product including the software may only be returned within 30 days following acquisition of the product. Upon return a claim according to § 11 shall not apply.

**4. Support, Upgrades and Updates after Product Registration** You can only receive support, upgrades and updates following the personal product registration. Support is provided only for the current version and for the previous version during one year after publication of the new version. Arturia can modify and partly or completely adjust the nature of the support (hotline, forum on the website etc.), upgrades and updates at any time.

The product registration is possible during the activation process or at any time later through the Internet. In such a process you are asked to agree to the storage and use of your personal data (name, address, contact, email-address, and license data) for the purposes specified above. Arturia may also forward these data to engaged third parties, in particular distributors, for support purposes and for the verification of the upgrade or update right.

**5. No Unbundling** The software usually contains a variety of different files which in its configuration ensure the complete functionality of the software. The software may be used as one product only. It is not required that you use or install all components of the software. You must not arrange components of the software in a new way and develop a modified version of the software or a new product as a result. The configuration of the software may not be modified for the purpose of distribution, assignment or resale.

**6. Assignment of Rights** You may assign all your rights to use the software to another person subject to the conditions that (a) you assign to this other person (i) this Agreement and (ii) the software or hardware provided with the software, packed or preinstalled thereon, including all copies, upgrades, updates, backup copies and previous versions, which granted a right to an update or upgrade on this software, (b) you do not retain upgrades, updates, backup copies and previous versions of this software and (c) the recipient accepts the terms and conditions of this Agreement as well as other regulations pursuant to which you acquired a valid software license.

A return of the product due to a failure to accept the terms and conditions of this Agreement, e.g. the product activation, shall not be possible following the assignment of rights.

**7. Upgrades and Updates** You must have a valid license for the previous or more inferior version of the software in order to be allowed to use an upgrade or update for the software. Upon transferring this previous or more inferior version of the software to third parties the right to use the upgrade or update of the software shall expire.

The acquisition of an upgrade or update does not in itself confer any right to use the software.

The right of support for the previous or inferior version of the software expires upon the installation of an upgrade or update.

**8. Limited Warranty** Arturia warrants that the disks on which the software is furnished is free from defects in materials and workmanship under normal use for a period of thirty (30) days from the date of purchase. Your receipt shall be evidence of the date of purchase. Any implied warranties on the software are limited to thirty (30) days from the date of purchase. Some states do not allow limitations on duration of an implied warranty, so the above limitation may not apply to you. All programs and accompanying materials are provided "as is" without warranty of any kind. The complete risk as to the quality and performance of the programs is with you. Should the program prove defective, you assume the entire cost of all necessary servicing, repair or correction.

**9. Remedies** Arturia's entire liability and your exclusive remedy shall be at Arturia's option either (a) return of the purchase price or (b) replacement of the disk that does not meet the Limited Warranty and which is returned to Arturia with a copy of your receipt. This limited Warranty is void if failure of the software has resulted from accident, abuse, modification, or misapplication. Any replacement software will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is longer.

**10. No other Warranties** The above warranties are in lieu of all other warranties, expressed or implied, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose. No oral or written information or advice given by Arturia, its dealers, distributors, agents or employees shall create a warranty or in any way increase the scope of this limited warranty.

**11. No Liability for Consequential Damages** Neither Arturia nor anyone else involved in the creation, production, or delivery of this product shall be liable for any direct, indirect, consequential, or incidental damages arising out of the use of, or inability to use this product (including without limitation, damages for loss of business profits, business interruption, loss of business information and the like) even if Arturia was previously advised of the possibility of such damages. Some states do not allow limitations on the length of an implied warranty or the exclusion or limitation of incidental or Oconsequential damages, so the above limitation or exclusions may not apply to you. This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.